

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

ORDER NO. R5-2008-0021

CLOSURE WASTE DISCHARGE REQUIREMENTS
FOR
MERIDIAN BEARTRACK COMPANY
MERIDIAN GOLD COMPANY
AND FELIX MINING COMPANY
ROYAL MOUNTAIN KING MINE
CALAVERAS COUNTY

The California Regional Water Quality Control Board, Central Valley Region, (hereafter Regional Water Board) finds that:

1. The Royal Mountain King Mine (RMKM), operated by Meridian Beartrack Company and Meridian Gold Company, with landowner Felix Mining Company, (hereafter jointly Discharger), was originally regulated by Waste Discharge Requirements (WDRs) Order No. 88-176, which addressed the removal, transport, processing, and disposal of mined material. Since mining ceased, two WDRs were adopted for the closure of this site: WDRs Order Nos. 97-165 and 5-01-040. This Order rescinds and replaces Order No. 5-01-040.
2. Royal Mountain King Mine is west of Highway 4 and south of Rock Creek Road near the town of Copperopolis, Calaveras County, in Sections 18, 19, 20, 24, 29, 30, and 32, T2N, R12E, MDB&M, as shown in Attachment A, which is incorporated herein and made part of this Order by reference.
3. The Discharger operated the facility for the mining and extraction of gold. Ore was mined from a series of open pits (North, Skyrocket, and Gold Knoll) and milled at approximately 3,400 tons per day. Active mining began in March 1989 and ceased in June 1994. Mining facilities consisted of three open pits, a mill, a Flotation Tailings Disposal Area (FTR), a Leached Concentrate Residues Disposal Area (LCRF), a Process Water Retention Pond (PWP), overburden disposal sites (ODSs), and a low-grade ore storage area. The Discharger also constructed a cyanide heap leach facility within the LCRF to process low-grade oxide ore. Attachment B is a site map showing the locations of these units, and is incorporated herein and made part of this Order by reference.
4. The facility comprises the Assessors Parcel Numbers (APNs) listed in the table below. One landowner, Patricia McCarty, is not listed as a discharger because (a) she owns only a small portion of a waste management unit and (b) it is assumed that the listed Discharger will assume full responsibility for compliance with this Order. The Cook property is shown on Attachment B, but it does not contain any waste management units and is not subject to this Order.

Land Owner	APN No.	Description
Meridian Gold Company	053-411-016, 053-411-015, 053-411-014, 053-411-013, 053-411-002, 053-310-004, 053-012-008, 053-012-004, 053-012-001, 053-011-025, 053-011-018, 053-010-008, 053-101-007, 053-010-005, 053-010-004, 053-010-003, 053-010-002, 053-010-001, 053-009-008, 053-009-007, 053-009-006, 053-009-004, 053-009-003, 053-009-001, 050-431-004, 050-031-029, 050-031-018, 050-031-010, 053-322-003, 053-011-032, 053-322-002, 053-011-016, 053-011-033, 053-022-004, 053-011-034	Majority of the waste management units
Patricia McCarty	53-011-23 53-011-24	Portion of the Flotation Tailings Reservoir
Felix Mining	53-011-03 54-014-01	Portion of Gold Knoll ODS and West ODS

5. Seven of the RMK facilities were classified as mining waste management units (WMUs) and were classified as containing either a Group A, B or C mining waste. The following are the definition of these waste classifications per the California Code of Regulations Title 27 (Title 27) Section 22480:

“Group A — mining wastes of Group A are wastes that must be managed as hazardous waste pursuant to Chapter 11 of Division 4.5, of Title 22 of this code, provided the RWQCB finds that such mining wastes pose a significant threat to water quality;

Group B — mining waste of Group B are either:

- (A) mining wastes that consist of or contain hazardous wastes, that qualify for a variance under Chapter 11 of Division 4.5, of Title 22 of this code, provided that the RWQCB finds that such mining wastes pose a low risk to water quality; or

- (B) mining wastes that consist of or contain nonhazardous soluble pollutants of concentrations which exceed water quality objectives for, or could cause, degradation of waters of the state; or

Group C — mining wastes from Group C are wastes from which any discharge would be in compliance with the applicable water quality control plan, including water quality objectives other than turbidity.”

6. The table below shows the classifications for each WMU. In general, these are the same as in previous WDRs. However, these WDRs change the classification of the PWP from a Group A to a Group B WMU based on the current wastewater quality in the PWP. These WDRs also conditionally classify Skyrocket Pit as a Group C WMU, based on the Discharger’s method of containment (as described in Discharge Specification B.26). A description of each WMU and more details on waste characterization are found in the individual site section findings in these WDRs.

Waste Management Unit	Mining Waste Classification	Description
Leached Concentrate Residues Disposal Area	B	Heap leachate facility that contains cyanide, salts and metals.
Process Water Retention Pond	B	This unit contains water from the LCRF
Flotation Tailings Reservoir	C & B	The solids were classified as Group C mining waste based on acid generation. The liquid from the unit was classified as B based on salt load and elevated metals.
Sky Rocket Pit	C*	This WMU is receiving Group B liquid waste from the Group B ODSs, and previously received Group B liquid wastewater from the FTR. Liquid waste stored in Skyrocket Pit Lake could degrade surface and groundwater quality; however, as long as the Discharger manages the Pit in compliance with Discharge Specification B.26, the Pit is classified as Group C. If the Pit is not maintained in this manner, then the Regional Water Board will consider reclassifying the Pit as a Group B WMU.
Gold Knoll ODS	B	Elevated salts and metals.
Western ODS	B	Elevated salts and metals.
FTR ODS	B	Elevated salts and metals.

*Conditional

7. These WDRs require the closure of RMKM per Title 27. The LCRF is closed per Title 27 and with the adoption of these WDRs the PWP will have an approved closure plan. None of the other WMUs have a final Title 27 closure or an approved plan. These units are either very large or have other circumstances that makes the required prescriptive Title 27 closure difficult. Title 27 allows for an Engineered Alternative per Section 20080(b) of the regulations. The engineered alternative must meet the Title 27 performance standards for closure (i.e., no threat to water quality). These WDRs require the Discharger to submit an engineered alternative for closure of the entire site. The engineered alternatives may include other regulatory mechanisms for closure, such as a release to surface water under an NPDES permit, a groundwater containment zone (per State Water Resources Control Board Resolution No. 92-49), and/or a Basin Plan Amendment to de-designate beneficial uses of the groundwater or surface water.

REGULATORY HISTORY

8. The Discharger was originally regulated by WDRs Order No. 88-176, which addressed the removal, transport, processing, and disposal of mined material. Subsequent WDRs dealt with changes in individual units or operations. WDRs Order No. 90-188 included an expansion of the FTR. WDRs Order No. 91-078 included the modification of the LCRF to include a heap leach facility. WDRs Order No 91-195 approved a one-time processing of 5,000 tons of ore from an off-site location, implemented the new Article 5 of Chapter 15 [now Title 27], and updated findings regarding facility performance and operation. WDRs Order No. 94-209 incorporated the treatment and transfer of wastewater from the PWP/LCRF into the FTR. FTR wastewater treatment and subsequent transfer to Skyrocket Pit was also approved. Monitoring and Reporting Program (MRP) Order 94-209 was amended in October 1995 to reflect the evaluation monitoring and corrective action of the FTR. WDRs Order No. 97-084 prescribed closure requirements for all the WMUs at the facility, while Order No. 97-165 incorporated closure and post-closure maintenance and monitoring for the entire facility.
9. On 4 August 1994, the Regional Water Board adopted Administrative Civil Liability Order No. 94-210 for the discharge of treated wastewater from the PWP to the FTR. This was a violation of WDRs Order No. 91-195. The discharge occurred during the period from 18 January 1993 to 18 February 1993 (a period of 28 days) and totaled 4.6 million gallons (14 acre-feet) of treated wastewater. The Discharger was ordered to pay \$40,000.
10. On 15 March 2001, the Regional Water Board adopted WDRs Order No. 5-01-040. The previous WDRs, Order No. 97-165, had classified the West, Gold Knoll, and Flotation Tailings Reservoir overburden disposal sites (ODSs) as Group C mining waste. Based on impacts to surface water and groundwater from these ODSs, WDRs Order No. 5-01-040 reclassified the ODSs as Group B mining waste and required that closure of the ODSs comply with Title 27 requirements.

11. On 15 March 2001, the Regional Water Board adopted Cease and Desist Order (CDO) No. 5-01-041 as a companion order to WDRs Order No. 5-01-040. The CDO required that the Discharger cease discharges to surface water, close the ODSs, and comply with financial assurance requirements. The Discharger petitioned the CDO to the State Water Resources Control Board (State Water Board) in a letter dated 16 April 2001. The State Water Board subsequently approved the Discharger's request for stay of CDO No. 5-01-041.
12. On 25 April 2003, the Regional Water Board adopted Revised CDO No. 5-03-0055. This CDO required compliance with WDRs Order No. 5-01-041. The requirements in this CDO were similar to the previous CDO, including requiring Title 27 closure of the ODSs, cessation of discharges to surface waters, and establishment of financial assurances. The Discharger also petitioned this Order to the State Water Board.
13. On 20 May 2004, the State Water Board adopted Water Quality Order (WQO) No. 2004-0007, which vacated the Revised CDO and required the Regional Water Board and the Discharger to consider a number of actions. These WDRs implement the findings and conclusions from this Order as described in detail in the attached Information Sheet.
14. National Pollution Discharge Elimination System (NPDES) permit Order No. R5-2007-0162 was adopted by the Regional Water Board on 6 December 2007. This Order acknowledges the transfer of the Group B spring water from the ODSs into Skyrocket Pit Lake, as authorized by these WDRs. The NPDES permit also allows the wastewater stored in Skyrocket Pit Lake to be discharged to Littlejohns Creek during periods of high runoff. The purpose of the discharge is to allow management of the site-wide water balance and to lower Skyrocket Pit Lake to an operating level that would (a) prevent any seepage from the lake into the Littlejohns Creek Diversion and (b) reverse the groundwater flow inward toward the lake, thus capturing degraded groundwater.
15. Time Schedule Order (TSO) No. R5-2006-0900 and TSO No. R5-2007-0900 were issued to allow the temporary transfer of Group B wastewater from the ODSs into Skyrocket Pit, and emergency discharge from Skyrocket Pit to Littlejohns Creek in the event it was required during extreme wet climatic conditions. The emergency discharge was not utilized by Meridian during the 2006/2007 wet season. It is anticipated that another TSO will be issued in early 2008 to authorize the transfer and discharge for the 2007/2008 wet season since the discharge authorized by NPDES Order No. R5-2007-0162 cannot be implemented during this period.

DESCRIPTION OF SITE

16. The project is underlain by complexly deformed meta-sedimentary and meta-volcanic rocks. The rocks belong to the Salt Springs Phyllites (formerly Mariposa Formation), which are deep ocean deposits that contain high sodium and chloride

ratios, and the Copper Hill Volcanics (formerly Logtown Ridge Formation) that contain high magnesium and bicarbonate ratios. The Salt Springs Phyllites and Copper Hill Volcanics are both of Jurassic age.

17. The Bear Mountains Fault Zone, consisting of the Hodson and Littlejohns faults and related structures, passes through the area and trends northwest-southeast. These faults generally separate the ultramafic (serpentine) from the phyllites. There has been no documented Holocene fault movement in the area. Hydraulic conductivity tests show the phyllite rocks, generally west of the fault zone, have a very low hydraulic conductivity. The fault zone includes mineralized rock that contains gold (as well as other minerals) and also sulfides that when oxidized, result in elevated dissolved TDS and sulfate concentrations in water.
18. The soil types include Argonaut, Auburn, and Whiterock soils. These soils are classified as silts and clayey silts with some sand and gravel. The soils are generally well to moderately well drained.
19. Groundwater generally flows to the south-southeast, along the topographic slope and the predominant fault and fracture direction. Cross faulting also occurs in the area allowing ground water movement to the southwest.
20. North Pit and Skyrocket Pit were dewatered during mining, creating hydraulic sinks. Since mining operations ceased in 1994, both North Pit and Skyrocket Pit began to fill with groundwater, as well as surface water, transfers from ODSs and FTR, and meteoric water. As a result of subsequent filling, the surface water elevation in Skyrocket Pit has reached a level that has resulted in a reversal of groundwater flow direction (i.e. mounding) at the southeastern end of the pit. Since April 1999, groundwater elevations demonstrate that groundwater gradient (i.e flow direction) is from Skyrocket Pit to the east-southeast towards GWM-12, PZ-4 and the Littlejohns Creek Diversion.

GROUNDWATER AND SURFACE WATER (GENERAL)

21. Surface water at the site is drained by Littlejohns Creek, Underwood Creek, and the most northeasterly tributary of Clover Creek. These surface waters drain to Flowers Reservoir, downstream of the site. Flowers Reservoir drains to Littlejohns Creek. Littlejohns Creek then discharges to French Camp Slough, which is tributary to the San Joaquin River and the Sacramento-San Joaquin Delta.
22. As described in the Water Quality Control Plan for the Sacramento River and San Joaquin River Basins, Fourth Edition (Basin Plan), the beneficial uses of the San Joaquin River are: Municipal and Domestic Supply, Industrial Process Supply, Hydropower Generation; Agricultural Supply, Water Contact Recreation; Non-contact Water Recreation; Warm Freshwater Habitat; Cold Freshwater Habitat; Spawning, Reproduction, and/or Early Development; and Wildlife Habitat. The beneficial uses of the Sacramento-San Joaquin Delta are: Municipal and

Domestic Supply; Agricultural Supply; Industrial Process Supply; Industrial Service Supply; Water Contact Recreation; Non-contact Water Recreation; Warm Freshwater Habitat; Cold Freshwater Habitat; Migration of Aquatic Organisms; Spawning, Reproduction, and/or Early Development; Wildlife Habitat; and Navigation. Surface water drainages are presented in Attachment D, which is incorporated herein and made part of this Order by reference.

23. As described in the Basin Plan, “unless otherwise designated by the Regional Water Board, all groundwaters in the Region are considered suitable for or potentially suitable, at a minimum, for municipal and domestic water supply, agricultural supply, industrial service supply, and industrial process supply.” As described in the Findings below, it is noted that at specific locations across the mine site, background groundwater and surface water quality did not meet beneficial use criteria before mining began, nor does it currently meet all beneficial use criteria.
24. The main issue related to groundwater and surface water at this site is that water has come into contact with mining waste, dissolved metals, and other inorganic constituents associated with localized naturally-occurring mineralized rock, some of which has been relocated to the WMUs as a result of mining. Groundwater associated with these WMUs contains dissolved inorganic constituents that exceed background concentrations and beneficial use criteria.
25. Another major issue at this site is that water, which has come in contact with mining waste, is being stored in several WMUs and this water storage, along with cessation of dewatering of the mine pits, has caused year-round flows in streams and springs that were dry during the period of mining. Except for extremely wet years, the summertime stream and spring flows are likely wastewater seepage from the WMUs and groundwater. This storage of wastewater is also causing an elevated hydraulic head on the FTR liner and mounding that is releasing wastewater to groundwater. This water storage is causing a water balance issue that must be resolved before the site no longer causes impacts to surface water and groundwater. This Order requires a plan to resolve the impacts to surface water and groundwater.
26. Before mining began in 1989, groundwater and surface water quality varied widely across the site. Good (defined as “below all beneficial use criteria”) to poor quality water was found west of Hodson Fault; to the east of the Hodson and Littlejohns faults, water was of good quality; and between the faults groundwater varied from good to fair quality. This difference in water quality from one side of the faults to the other is associated with varying rock types. Because there is a large variation in natural water quality, a more thorough evaluation of the water chemistry is required from each well and surface water monitoring location relative to the geologic (rock type) position of the sampling point. This evaluation is completed in later Findings. In these later Findings, most of groundwater and surface water comparisons are from one data period to another, showing change overtime. Comparisons are made between pre-mining data (or early mining data) versus

sampling results after mining up to present day. Because of the naturally varying water quality, "background" at most sampling points is considered to be pre-mining data.

27. The following Findings describe groundwater and surface water quality in general, using the chemical signature of the water. A chemical signature is the relative portion of one chemical to another in a sample. This chemical signature is used to determine if one sampling point is similar to another sampling point, or if water quality has changed from one sampling period to another. Staff's analysis shows that the chemical signature is generally consistent from one sampling location to another in a particular rock type. The Discharger has submitted analytical data that leads them to conclude that every well has a different signature, although there are some very general consistencies between wells completed in the same rock type. Also, the mine-impacted water demonstrates a significantly different chemical signature than the original background water chemistry.

General Groundwater Observations (not related to WMUs)

28. The facility contains three distinct geology-related groundwater zones, each of which is separated by faults. East of the Littlejohns Fault, the groundwater is primarily in a greenstone formation. Between the Littlejohns Fault and the Hodson Fault to the west, groundwater is in a mixture of greenstone and phyllite and the mineralization that occurs in this area. West of the Hodson Fault, groundwater is primarily in a phyllite formation. The following findings describe the groundwater geochemical differences between these three zones.
29. Wells constructed within the greenstone include: PZ-1, GWM-1, GWM-2, GWM-11, GWM-18/30, GWM-26, GWM-33, GWM-35A/B, GWM-36A/B, and GWM-37. Well logs from these individual wells show that they are drilled through greenstone for the entire length of the gravel pack and screen interval. Groundwater chemistry associated with the greenstone indicates the anions are generally higher in bicarbonate relative to sulfate and chloride. Magnesium and calcium are the major cations, with sodium being relatively insignificant.
30. Wells constructed within the phyllite include: GWM-10, GWM-19, GWM-20, GWM-31, and GWM-32. The well logs from these individual wells show that they are drilled through phyllite for the entire length of the gravel pack and screen interval. Groundwater chemistry associated with the phyllites is generally high in sodium, sulfate, and chloride when compared to bicarbonate, calcium and magnesium.
31. Wells constructed between the Hodson and Littlejohns Faults generally have a mixture of phyllite and greenstone in the borehole. The monitoring wells in this area include: GWM-3, GWM-4, GWM-6, GWM-15, GWM-16, and GWM-25. Again, the well rock type is based on well logs from these individual wells, which shows that they are drilled through greenstone and phyllite for the entire gravel pack and screen interval. Groundwater chemistry associated with these wells is

generally high in calcium when compared to sodium. Bicarbonate is the dominant anion.

32. The following table shows the groundwater quality from the pre-mining period (i.e., years 1987 through 1989). The data shown is the maximum, minimum, and median concentration for the wells in each area, which is represented by its geologic location. The median rows are the median concentrations of those wells averaged for each area. The following wells are used for each geologic area: Greenstone wells are GWM-1, GWM-2, GWM-11, GWM-18/30, and GWM-26; Phyllite wells are GWM-10, GWM-19 and GWM-20; and Fault zone wells are GWM-3, GWM-4, GWM-6, GWM-15, GWM-16 and GWM-25.

Constituent	Units	Greenstone Wells			Phyllite Wells			Fault Zones Wells		
		min	max	median	Min	max	median	min	max	median
pH	number	7.5	7.7	7.5	7.3	7.5	7.3	7.2	7.8	7.4
Specific Conductance	umhos/cm	247	534	262	1653	17286	11759	429	1303	719
Total Dissolved Solids	mg/l	167	339	223	1113	12956	9246	265	810	541
Chloride	mg/l	7	28	12	188	4401	2750	5	196	12
Sulfate	mg/l	10	26	14	282	3426	2729	21	122	74
Calcium	mg/l	10	26	23	55	288	258	55	131	101
Magnesium	mg/l	17	55	20	16	73	67			
Bicarbonate	mg/l	96	238	100	221	1465	287	191	334	238
Sodium	mg/l	7	13	11	308	4098	2743	11	156	18

33. It is noted that groundwater concentrations within the phyllite area are highly variable. For example, the pre-mining phyllite monitoring wells in the above table have a TDS median concentration of 9246 mg/l; however, monitoring well GWM-32, a phyllite well just west of two of the phyllite pre-mining wells, had a TDS concentration in 2007 of 380 mg/l. Also domestic supply wells west of the fault zone in the phyllites were found to have a TDS range from 300 mg/l to 1460 mg/l, with median value of 420 mg/l.
34. Upgradient groundwater quality on the eastern side of RMKM is not well known, particularly east of the FTR ODS near Littlejohns and Underwood Creeks. A monitoring well in this area could provide groundwater gradient information and better define the quality. This Order requires the Discharger to submit a groundwater evaluation monitoring report that includes an assessment of whether additional data is required in this area.

General Surface Water Observations (not related to WMUs)

35. Prior to mining, all the streams flowing through the property were intermittent to seasonal streams. Most flow occurred during or just after rainfall. During the late spring, summer, and fall no stream flow occurred. Presently, year round flow occurs at the Littlejohns Diversion through sampling point SWM-10 to Flowers Reservoir. However, no flow occurs upstream of the facility from late spring through fall.
36. Prior to mining, upgradient surface water quality east of the fault zone was generally good with TDS concentrations ranging from 50 to 265 mg/L at SWM-1 and SWM-4. SWM-1 and SWM-4 are located on Littlejohns Creek and Underwood Creek, respectively. These TDS concentrations are well below the drinking water standard. There was no detectable arsenic, and very low to non-detect concentrations of various trace metals.
37. Prior to mining, surface water quality downstream and west of the fault zone varied greatly, depending on sampling location and flow conditions at the time of flow, with better water quality during higher flow conditions.
38. SWM-2 is directly downgradient of the Skyrocket Pit on Littlejohns Creek. Pre-mining sampling performed at this location in 1987 and 1988 represents sampling of Littlejohns Creek during extreme low rainfall seasons, and consequently concentrations of TDS and other constituents were higher than in a normal wet season. TDS concentrations reported ranged from 865 to 4,065 mg/L and metals concentrations were low. Sodium was the predominant cation, while chloride and sulfate were the predominant anions, which is typical of groundwater in the fault zone and phyllite, suggesting that surface water quality is also affected by rock type. Concentrations of sodium and chloride reported during this period were higher than sulfate, calcium and magnesium, which is typical of water associated with the phyllites. Because the next sampling event after 1988 was after Littlejohns Creek was diverted around Skyrocket Pit, no "normal" water year pre-mining samples were collected from Littlejohns Creek.
39. SWM-10 receives flows from the diverted Littlejohns and Underwood Creeks and a small drainage north of Gold Knoll ODS. Based on monthly sampling results from 1990 to 1997, flows only occurred at SWM-10 from December to May of each year during the period of mining (when the groundwater levels were lowered by dewatering of the pits). This sampling point would capture any discharges or springs associated with the FTR, FTR ODS, Skyrocket Pit to the east and southeast, and Gold Knoll to the North. In 1990, when SWM-10 was first being sampled and before any significant surface discharges from these units occurred, the TDS concentrations ranged from 52 to 363 mg/L and metal concentrations were low. It appears no significant summer time surface flow occurred in Littlejohns Creek until June 1998, when the Skyrocket Pit level (after pit dewatering) reached 953 ft above MSL.

40. From 1990 to 1997, 28 of the 34 samples collected at SWM-10 had TDS less than 350 mg/L and 16 of those were below 200 mg/L.
41. According to the record, the Littlejohns Creek Diversion at SWM-10 started flowing year-round in 2000. The constituent concentrations during this period varied seasonally, with the wet season concentrations being slightly higher than those observed during 1990 through 1997. In addition, higher concentrations were observed during the dry season when there is typically no runoff. The median TDS concentration for 2006 is 1,830 mg/L and was reported as high as 2,310 mg/L. Sulfate also increased from mostly less than 100 mg/L to become the dominant salt in the water ranging between 450 to 900 mg/L in 2000. In 2005 and 2006, sulfate concentrations increased to over 1,300 mg/L.
42. It is unclear what water elevation in Skyrocket Pit Lake causes water from Skyrocket Pit Lake to flow into Littlejohns Creek Diversion. These WDRs require the Discharger to survey the Diversion creek bottom elevation to determine the elevation needed to prevent Skyrocket Pit Lake water from flowing into the Littlejohns Creek Diversion.
43. SWM-3 is the surface water monitoring point at the outfall of Flowers Reservoir. Flowers Reservoir is downgradient of RMKM and captures all the surface water flows in contact with the mine site. This reservoir also captures Clover Creek and several other small, unnamed seasonal drainages. Flowers Reservoir is located in the Diamond Twenty subdivision and is used as an irrigation supply and recreational facility.
44. SWM-3 shows the impacts at Flowers Reservoir since mining began. During the pre-mining period (1987 and 1988), TDS and sulfate concentrations averaged 479 mg/L and 84 mg/L, respectively. Due to evapoconcentration, these TDS and sulfate concentrations were higher than the sampling results for the next five years (1989 to 1993), which were diluted because of higher annual rainfall.
45. In 2006, SWM-3 had average TDS and sulfate concentrations of 753 mg/L and 368 mg/L, respectively. Both TDS and sulfate have increased since 1987. The 2005/2006 rainy season was extremely wet, with more available dilution, yet even with the increased precipitation, the five highest concentrations of TDS reported were detected in 2006 ranging from 1000 to 1150 mg/L. This indicates that salts continue to concentrate in Flowers Reservoir over time. Another important constituent is arsenic, which in 1987-1988 was less than 0.010 mg/L. During 1993, arsenic was reported at 0.006 mg/L, and in 2006 arsenic has increased to 0.012 mg/L. In the dryer year of 2005, arsenic was reported at it highest concentration of 0.034 mg/L.
46. The data shows that RMKM has impacted surface water; however, the extent of the impact compared to pre-mining conditions cannot be determined due to the lack of sufficient pre-mining data, as concluded in the State Water Board Order. The major issue is storage of excess water that has created the year-round flow in

the previously intermittent creek. In the winter months, dilution occurs which lowers the salts and metals concentration in surface water. In the summer months, all the flow coming from the mine site is collected in Littlejohns Creek. This water contains elevated levels of salts and metals that are not being diluted, thus impacting the downstream creeks and Flowers Reservoir.

47. These WDRs require that the Discharger capture all springs that are associated with flows from the WMUs. These springs are to be captured and managed so they are no longer a threat to water quality.

INDIVIDUAL SITE DESCRIPTION

Flotation Tailings Reservoir (FTR)

48. The FTR (also known as WMU #1) was constructed in an intermittent stream valley northeast of North Pit Lake. The FTR was designed utilizing naturally occurring clay and fine-grained tailings as a bottom liner system. The southern portion of the FTR bottom liner system was constructed with 2-feet of clay with a maximum hydraulic conductivity of 8×10^{-7} cm/s. The northern portion of the FTR bottom liner system was constructed with 1-foot of clay with a maximum hydraulic conductivity of 8×10^{-8} cm/s. The FTR contains 6.5 million tons of flotation tailings.
49. Flotation tailings solids stored in the FTR were classified as a Group C mining waste per Section 22480 of Title 27 based on a net neutralization potential of 179 tons of CaCO_3 equivalent per 1000 tons of ore, and the lack of any significant extractable substances using the deionized water waste extraction test.
50. Flotation tailings liquid in the FTR were classified and managed as a Group B mining waste, based on the presence and potential presence of flotation reagents or their breakdown products, some heavy metals in the flotation tailings liquid, and elevated levels of TDS. All of these conditions indicated a potential threat to groundwater and surface water quality near the FTR.
51. The FTR was closed as a Group C mining waste management unit in 1997. Closure consisted of the following:
 - Regrading the surface to a minimum slope of one percent;
 - Placement of six inches of soil over the tailings, followed by revegetation;
 - Construction of ditches along the eastern edge of the FTR;
 - Construction of a permanent spillway through the embankment and swales connecting to the spillway to allow free drainage of surface water from the FTR;
 - Decertification of the dam as a jurisdictional structure by the Department of Water Resources' Division of Dam Safety; and
 - Continued discharge of leachate from the FTR's Leachate Collection Recovery System (LCRS) to Skyrocket Pit.

52. The WDRs requires an amendment to the FTR closure plan, as the previous closure is no longer fully valid due to the closure of the LCRS.

FTR Drains (Spring, Spine, Foundation, and LCRS)

53. Flotation tailings liquid within the FTR is collected by a LCRS, which was designed to drain the FTR. The LCRS overlies the outer clay layer and is a network of perforated pipes in drain rock that is intended to minimize the hydraulic head on the outer liner. It was constructed with 4-inch diameter perforated drain pipe covered with crushed rock sized between 0.5 and 6-inches.
54. Groundwater and spring water beneath the FTR is managed by a series of drains described as Spine Drain 1, Spine Drain 2, and the Spring Drain. These drains were utilized during mining operations to maintain separation of groundwater from the outer clay liner. The Spine Drains consist of a network of interconnected trenches below the clay liner that contain perforated plastic pipe and gravel. The Spring Drain consists of a spring collection sump with a pipeline in a gravel filled trench conveying spring flow to the FTR drain collection sump.
55. The FTR also has a Foundation Drain used to drain water from the foundation of the embankment. The Foundation Drain consists of vertical boreholes/wells constructed in the embankment foundation trench fitted with pipes that convey the collected water to the FTR drain collection sump.
56. The spine, spring, and foundation drains under the FTR were closed in October 1998 as a test to determine the effects of blocking the FTR drains on 1) groundwater conditions, 2) containment of the FTR and 3) Skyrocket Pit lake level. According to the 20 July 2007 Report of Waste Discharge, the test results submitted periodically to the Regional Water Board demonstrated that blocking the drains resulted in an inward gradient across the outer liner of the FTR (i.e. groundwater was flowing into the FTR and reporting to the LCRS drain).
57. Previous WDRs required leachate from the FTR be collected and transferred to Skyrocket Pit. In March 2003, the Discharger shut down the LCRS without approval from Regional Water Board staff, in violation of WDRs No. 5-01-040 and Title 27, CCR, Division 2, Subdivision 1. The Discharger notified Regional Water Board staff prior to the action, stating that blocking the LCRS was necessary to control the water balance in Skyrocket Pit Lake. State Water Board Order WQO No. 2004-0007 stated that the Regional Water Board could not take enforcement action against this WDR violation, prior to a revision of the closure WDRs. The issue has been addressed in these WDRs as the spine, spring, and LCRS drains may remain closed while the Discharger conducts studies and submits an amendment to the FTR closure plan showing that the final closure is protective of water quality.
58. Water levels within the FTR tailings are monitored by Piezometers FPZ-1A/1B and FPZ-2. FPZ-1A is deeper than FPZ-1B and recorded water levels in FPZ-1A have always recorded lower than water levels in FPZ-1B, indicating a downward

gradient and downward flow of water through the tailings during the period the LCRS was draining. This reflected the expected dewatering of the tailings. Since the FTR LCRS was closed in March 2003, the FPZ-1A/1B water levels have risen and in 2006 were approximately equal due to re-saturation of the tailings.

59. The FTR's ground surface elevation is approximately 1,050 feet above mean sea level (MSL), while the reference elevation of the LCRS is 978.16 MSL. After the LCRS valve was closed in March 2003, water levels in Piezometer FPZ-1A and FPZ-1B sharply increased, rising to near the ground surface of the FTR during the second quarter of 2006. Water levels in the LCRS also increased, reaching a maximum reported elevation of 1046.39 during the first quarter 2006. The spine and spring drain also reached their maximum reported elevations during this period (1038.69 MSL and 1034.61 MSL, respectively). Because the LCRS elevation is higher than the spine and spring drains, this indicates an outward gradient from the LCRS through the liner to groundwater over a portion of the FTR's footprint.
60. The Discharger has submitted an annual containment assessment for the FTR since the LCRS drain was closed. The most recent assessment was submitted in September 2007, and provides seepage calculations across the outer clay liner of the FTR. The calculations indicate groundwater from the spine and spring drains, which was once moving across the outer clay liner into the FTR, had reversed direction after closure of the LCRS to indicate an outward flow. However, according to the Discharger, the estimated seepage flow is less than what is allowed by a prescriptive Title 27 liner system for an active Group B WMU. However, the unit has been closed and therefore the seepage rate is in excess of what is allowed for a prescriptive closure. This issue will be addressed in the required Amendment #3 to the 1996 FTR closure plan.
61. Based on the Findings above, the closure of the LCRS, spine, spring, and foundation drains has allowed Group B mining waste to rise 50 feet within the FTR tailings facility. The purpose of the LCRS system is to minimize the hydraulic head on the outer clay liner; however, without operation of the LCRS, the hydraulic head is increased.
62. An additional source contributing to increased head in the piezometers and LCRS is infiltration of meteoric water through the cover. The FTR cover was constructed with six inches of soil and then vegetated.

Love Pond Spring

63. Water with elevated TDS is discharging from the base of the FTR-ODS in an area known as Love Pond Spring. The spring discharges into Littlejohns Creek Diversion. The spring began flowing several years after closure of the FTR's spring, spine and LCRS drains.
64. According to the Discharger's April 2007 document submitted in response to TSO No. R5-2006-0900, Love Pond Spring was first reported to be flowing in July 2005

at an estimated rate of 900 gallons per minute (gpm). The Discharger has recently verbally stated that they don't believe this flow measurement is accurate. Flow measurements were not recorded during October 2005 through April 2006. In May 2006 the flow was 786 gpm and in October 2006 was 49 gpm. During a site visit by staff in October 2007, the area where the spring was flowing during staff's previous visit in May 2006 was not flowing, but the area at the base of the FTR ODS contained standing water. As indicated by the range of flows measured, the flow from Love Pond Spring varies seasonally, consistent with other springs in the foothills.

65. During the period discussed in Finding 64, all flow recorded at surface water monitoring station SWM-16 (located in Littlejohns Diversion) was due to Love Pond Spring. Staff also noted that surface water flows reported for Love Pond Spring coincide with the rise of groundwater levels in the FTR piezometers. The Discharger will evaluate the source of the Love Pond Spring water.
66. According to the electronic data provided by the Discharger, Love Pond Spring has been sampled four times since it began flowing in 2005, as shown below.

Average Concentrations for Love Pond Spring (May 2006 – March 2007)

TDS	Sulfate	Sodium	Calcium	Bicarbonate
2,315 mg/L	1,205 mg/L	208 mg/L	176 mg/L	239 mg/L

FTR and FTR ODS Groundwater

67. Groundwater elevation within the FTR is monitored by several wells as shown on Attachment C. Wells FPZ-1A and FPZ-1B are located in the southern portion of the WMU, whereas FPZ-2 is located in the northern portion of the WMU. Two monitoring events from FPZ-1A were available for water quality evaluation.
68. Groundwater chemistry within the FTR is characterized by high TDS, sulfate, sodium and bicarbonate. This is to be expected since the water within the FTR was used to process the finely ground ore, which is comprised of phyllite (sodium) and greenstone (bicarbonate) rocks. The sulfate is provided by mineralized ore that has oxidized. Sulfate is the dominant constituents of the TDS. The average concentrations from May 2006 and January 2007 are:

Average Concentrations from Well FPZ-1A (May 2006 – January 2007)

TDS	Sulfate	Sodium	Calcium	Bicarbonate
2,030 mg/L	820 mg/L	510 mg/L	59 mg/L	319 mg/L

69. Groundwater in the vicinity of the FTR is monitored by monitoring wells GWM-02 and GWM-30. These wells have been identified as Greenstone wells and are located east of the mineralized fault zone; groundwater in this region is of high quality. GWM-30 is located downgradient of the FTR-ODS (see Attachment C). Pre-mine water quality at these locations was generally good.

70. Pre-mining water quality data for GWM-02 was presented in staff's *Technical Analysis of Water Quality Changes at the Royal Mountain King Mine Report* (Technical Report) dated 1 April 2003. Groundwater data for GWM -02 was evaluated from 1987 through 1989 (pre-mining); January – October 2000; and July – April 2007. As indicated in the Table below, groundwater associated with well GWM-02 contained typical concentrations associated with greenstone wells (low sulfate and sodium and high bicarbonate.) By the year 2000, mining impact indicator parameters (sulfate and TDS) had increased (following the closure of the FTR in 1997). Current groundwater concentrations indicate much the same concentrations as those reported in 2000.
71. Concentration of mining impact indicator parameters (sulfate and TDS) peaked at GWM-02 in 1998 (i.e., just after the closure of the FTR in 1997). Current groundwater concentrations indicate a general improvement since that time.

Average Concentrations From Well GWM-02

Analyte	Pre-mining (1987 – 1989)	January – October (1998)	July – April (2007)
TDS	329 mg/L	1,315 mg/L	828 mg/L
Sulfate	15.6 mg/L	510 mg/L	271 mg/L
Sodium	8.7 mg/L	60 mg/L	58 mg/L
Calcium	38 mg/L	121 mg/L	97 mg/L
Bicarbonate	238 mg/L	275 mg/L	314 mg/L

72. As shown in the above table, TDS and sulfate has increased over pre-mining concentrations approximately 2.5 and 17 times, respectively. The Discharger submitted an Engineering Feasibility Study (TRC, 1997) that concluded the changes at this location were likely due to seepage from nearby storage of mined materials (i.e, from the FTR and FTR-ODS).
73. As discussed in Finding 58, the closed LCRS, Spring, and Spine drains have allowed water levels to rise in the FTR, which has increased the head on the outer clay liner thus increasing the seepage rates across the liner. Based on the depth to water measurements recorded during the second quarter 2007 monitoring event, the depth to water in well GWM-02 was 986.4 feet msl. The Discharger has allowed water to be stored in the FTR, which has caused a head to build up within the tailings.
74. As discussed in the 1 April 2003 Technical Report, well GWM-30 is downgradient of the FTR and FTR-ODS. Therefore, groundwater quality beneath these units cannot be separated. Based on a review of the electronic data submitted by the Discharger, it appears that pre-mining groundwater quality collected from well GWM-30 was of high quality as typically found in the Greenstone (low sulfate and sodium and high bicarbonate.) Concentrations of mining impact indicator parameters (sulfate and TDS) had peaked at GWM-30 in 1996 (i.e. prior to the

closure of the FTR in 1997). Current concentrations from sampling events from April 2003 through January 2007 indicate that groundwater in the vicinity of well GWM-30 continues to be affected by mining impacts.

Average Concentrations From Well GWM-30

Analyte	Pre-mining (1989)	January – October (1998)	April - January (2003-2007)
TDS	339 mg/L	2,825 mg/L	2,575 mg/L
Sulfate	26 mg/L	1,563 mg/L	1,401 mg/L
Sodium	13 mg/L	183 mg/L	118 mg/L
Calcium	23 mg/L	225 mg/L	225 mg/L
Bicarbonate	221 mg/L	208 mg/L	293 mg/L

75. As shown in the table below, it appears that high quality groundwater exists west and east of the FTR. Groundwater associated with FPZ-3 and FPZ-6 is typical of greenstone wells, which is low in sulfate and sodium and high in bicarbonate. Constituents of concern analyzed in January 2007 are presented below:

Groundwater Concentrations for FPZ-3 and FPZ-6 (January 2007)

Well ID	TDS	Sulfate	Sodium	Calcium	Bicarbonate
FPZ-3	350 mg/L	30 mg/L	32 mg/L	38.5 mg/L	288 mg/L
FPZ-6	320 mg/L	20 mg/L	7.7 mg/L	35.9 mg/L	261 mg/L

FTR and FTR ODS Surface Water

76. In order to evaluate water quality conditions near the FTR ODS, surface runoff and spring water in the vicinity of the FTR and FTR-ODS has been tested for water quality at four sampling points: the FTR-ODS located south of the ODS, and the FTR-east, FTR-west and Love Pond Spring.
77. The FTR-ODS sampling point is located at the southern base of the ODS, northeast of SWM-06 in Littlejohns Creek. The FTR-ODS sampling location refers to a seep that pools at the base of the FTR-ODS. The electronic database indicates surface water samples were collected from the FTR-ODS location between May 1998 and February 2000. The data is presented below.

Average Concentrations for FTR-ODS (March 1998 – February 2000)

TDS	Sulfate	Sodium	Calcium	Bicarbonate
448 mg/L	403 mg/L	121 mg/L	62 mg/L	96 mg/L

78. Surface water analyzed from the FTR-ODS contains elevated concentrations of TDS, sulfate, and sodium. It appears that surface water directed to the base of the FTR-ODS has been at least partially impacted by the mining unit or by groundwater seepage.

79. Upon examination of the Love Pond Spring data in Finding No. 66 and the FTR-ODS surface water quality data above, it appears the water chemistry between the two locations is very different and therefore, likely of different sources. The FTR-ODS surface water samples appear to be in contact with the surface of the FTR-ODS. This surface water is only available for sampling during the winter and early spring when runoff is occurring.

Overburden Disposal Units (General)

80. During operation of the mine, approximately 54 million tons of overburden were removed from the three pits and disposed in either the: (1) West ODS, (2) FTR ODS, or (3) Gold Knoll ODS. Reclamation of each ODS was conducted during the mine operation period. The slopes were graded to natural looking slopes ranging from 2:1 to 3:1 (horizontal:vertical), covered with 6 inches of topsoil, fertilized and revegetated, and trees and shrubs were planted in irrigated trenches. In 1998, the covers of the West and Gold Knoll ODSs were enhanced by filling in swales, regrading the flat areas to a minimum two percent slope, placing a cover consisting of a minimum of four inches of compacted clayey topsoil over selected areas, replacing the topsoil layer, and revegetating. It is noted that the enhanced covers do not extend over the entire ODSs.
81. Overburden in the West, Gold Knoll, and FTR ODSs was conditionally classified as Group C mining waste in the original WDRs (Order No. 88-176) because the material was non-acid generating. However, the WDRs did not allow any statistically significant increase in background concentrations of arsenic or any other inorganic constituent due to the disposal of overburden or other mine activity, and required the Discharger to provide financial assurance for mitigation of any water quality impacts, including but not limited to covering the overburden piles with a clay cap and conducting any necessary groundwater or surface water remediation. The original Group C mining waste classification was maintained in all subsequent WDRs, through Order No. 97-165.
82. Statistically significant increases over background were detected for several constituents downgradient of the ODSs, as described below. Because the leachate from these ODSs has impacted groundwater and surface water, they were re-classified as a Group B Mining Waste in WDR No. 5-01-040.
83. The Discharger does not intend to continue spraying seepage water back on top of the ODSs, as this Order allows the seepage water to be transferred to Skyrocket Pit instead. However emergency conditions (specifically, an elevated level in Skyrocket Pit) may dictate the need to resume spray irrigation on the ODSs, or to spray irrigate on the walls of Skyrocket Pit. This Order allows those actions under emergency conditions.

Overburden Disposal Sites Reclamation and Title 27 Closure

84. The Discharger conducted infiltration/permeability testing on the West and Gold Knoll ODSs in February 2000 in the areas where cover enhancements were

performed. The testing procedure was a modified procedure developed by the U.S. Bureau of Reclamation. The Discharger concluded that the enhanced cover material has hydraulic conductivity about 1×10^{-5} cm/sec. This hydraulic conductivity is equivalent to silt or silty sand versus a low permeable compacted clay cover. This is more conductive than a Title 27 Group B prescriptive cover (1×10^{-6} cm/sec).

85. The existing closure of the ODSs does not comply with the prescriptive Title 27 requirements for Group B mining waste. However, State Water Board's Order No. 2004-007 determined that placing a Title 27 prescriptive cover on the ODSs would not be effective in preventing groundwater from coming in contact with waste. This conclusion was based on the fact that the bottom of the units are not lined, and the State Water Board's belief that groundwater was upwelling into the waste and being degraded. The Order also stated that a cover preventing storm water from percolating through the waste would not substantially reduce the flow of the discharge or improve the water quality. This Order complies with the State Water Board Order and does not require a prescriptive cover on the ODSs.
86. As described in greater detail in the attached Information Sheet, the State Water Board found that it is appropriate to consider alternative closure methods, and once they are implemented, the overburden disposal sites could be reclassified from Group B mine waste units to Group C mine waste units. The State Water Board Order highlights wetlands as an alternative closure method, and the Discharger evaluated that option, but is no longer pursuing that closure approach as it believes that it would not be possible to obtain the necessary NPDES permits.
87. The Discharger has submitted an Alternatives Analysis Report that indicated the most feasible approach to closure of the ODSs is to collect the captured flows at the toes of the ODSs, transfer these to Skyrocket Pit Lake for seasonal storage, and release flows from the pit during high runoff periods into Littlejohns Creek under an NPDES permit. NPDES Permit No. R5-2007-0162 has been adopted. The Discharger may consider the use of alternative regulatory measures in its closure plan, including but not limited to a containment zone or de-designation of beneficial uses of the groundwater and/or surface water.

Gold Knoll ODS (General)

88. The Gold Knoll ODS is located in an area where mining initially occurred. Gold Knoll pit was filled with overburden from Skyrocket Pit. In addition, some surrounding land was also covered by overburden until the disposal area covered approximately 60 acres. The former pit filled with groundwater and storm water that came in direct contact with the waste rock.

Gold Knoll ODS Surface Water

89. SWM-09 is a sampling location on an unnamed stream downgradient of Gold Knoll ODS. Before mining began, TDS concentrations ranged from 116 to 485 mg/l and sulfate concentrations ranged from 18 to 108 mg/l.

90. Seepage flow rates from Gold Knoll ODS have been measured from a low of 1 gpm during the dry season to as high as 266 gpm during the wet season. Seepage from Gold Knoll ODS has maximum concentrations of arsenic (0.024 mg/L), chloride (245 mg/L), nitrate (104 mg/L), selenium (0.090 mg/L), sulfate (3,990 mg/L), and TDS (6,410 mg/L). These values exceed water quality objectives.
91. In response to elevated TDS concentrations in seepage from the Gold Knoll ODS, a temporary control measure was implemented at the base of the ODS. A well, seepage collection trench and level-activated barge pump were installed to collect and remove the high TDS seepage from this area. The collected water was pumped to the surface of the ODS for evaporation and infiltration into trenches directly overlying the backfilled Gold Knoll Pit. This reinfiltration system operated between December 1995 and July 1997, and again from November 1997 to early January 1998.
92. Due to the increase in seepage flow and concentrations of TDS, the Discharger requested that seepage from Gold Knoll ODS be discharged into Skyrocket Pit. In a 29 August 1997 letter Regional Water Board staff approved the transfer of Gold Knoll seepage to Skyrocket Pit on an immediate short-term basis for the winter of 1997/1998. The seepage was to be blended with other on-site waters discharged into Skyrocket Pit so that the blended water met transfer standards specified in Order No. 97-165.
93. The Discharger discharged Gold Knoll ODS seepage into Skyrocket Pit from February 1998 to November 2000. However, concentrations of sulfate, selenium, nickel, and TDS in this seepage did not meet the transfer standards specified in WDRs No. 5-01-040 for wastewater transferred to Skyrocket Pit. During this time period, the TDS in Skyrocket Pit increased from 1480 mg/l to approximately 2200 mg/l, and the sulfate concentration in Skyrocket Pit increased from 690 mg/l to approximately 1100 mg/l. The Discharger states that these salinity increases are not solely due to the transfers.
94. Seepage flow rates associated with the Gold Knoll ODS vary seasonally. Increases in seepage rates are noted shortly after significant precipitation, with rates decreasing gradually after winter rains cease.
95. Based on the data from October 2004 to present, the unnamed stream sampled at SWM-9 shows impacts from discharges from the Gold Knoll ODS, even though most of the seepage water is being captured. TDS concentrations fluctuate in early winter between 1,950 to 5,000 mg/l and by mid-winter and early spring from 160 to 470 mg/l. The higher TDS concentrations are due to large increases in sulfate (1,420 to 3,220 mg/l), which is indicative of sulfide ore mining. The lower TDS concentrations in mid-winter and early spring are typical of surface water runoff diluted from precipitation events. The Discharger attributes the higher concentrations observed following runoff events to migration of the seepage

locations at the toe of the ODS to areas which are not included in the collection area of the sump.

96. Based on the data from January 1998 through December 2003, TDS concentrations fluctuated between 70 and 570 mg/L at SWM-09, indicating the Discharger was effectively controlling the Gold Knoll ODS captured flows by recirculating the collected water through spray evaporation systems on the surface of the ODS.
97. While the Discharger has made temporary modifications to the seepage collection facilities at the Gold Knoll ODS, a more permanent solution is being required by these WDRs.

Gold Knoll ODS Groundwater

98. A release of waste constituents northwest, north, and southeast of the Gold Knoll ODS to groundwater has been detected in GWM-11 and GWM-21, as shown in the table below. The concentrations found in GWM-11 and GWM-21 have increased over time and mining impact parameters (such as TDS and sulfate) are significantly elevated compared to concentrations reported in the 1988/1989 sampling results.

Monitoring Well	Constituent	1988/1989	2006
GWM-11	TDS	156 mg/L	1,328 mg/L
	Sulfate	10 mg/L	650 mg/L
	Nitrate	2.5 mg/L	13 mg/L
	Selenium	<0.005	0.012 mg/L
GWM-21	TDS	1,667 mg/L	4,230 mg/L
	Sulfate	288 mg/L	1,875 mg/L
	Nitrate	<1.0 mg/L	67 mg/L
	Selenium	<0.005	0.056 mg/L

99. Based on the information above, groundwater contamination north and southeast of the Gold Knoll ODS has not been adequately defined. These WDRs require that the Discharger evaluate whether additional data or monitoring wells are needed in this area.
100. The Discharger has installed three newer wells to the south-southeast of the Gold Knoll ODS to characterize groundwater quality in this area. As shown in the table below, these are unimpacted by any ore/mine related constituents and demonstrate the Discharger has characterized groundwater south-southeast of this WMU.

	Average TDS	Period
GWM-33	307 mg/L	February 2000 to April 2007
GWM-34	236 mg/L	February 2000 to April 2007
PZ-1	606 mg/L	February 2000 to April 2007

Western ODS (General)

101. The Western ODS is on western edge of the facility, west of Skyrocket Pit, southwest of North Pit and north of Littlejohns Creek. This ODS covers a surface area of approximately 125 acres. A north-south canyon was filled in with overburden from North and Skyrocket Pits. Surface water and groundwater has been impacted by water percolating through the waste as described in the following findings.

Western ODS Surface Water

102. The Discharger monitors seepage from the Western ODS at five different locations (West ODS 1, 2, 3, 4, and 5). Some of these springs did not begin discharging until after the Western ODS was created. Seepage at West ODS 2 is continuous year round, while seepage at the remaining locations occurs only during, and for a short time after, the wet season. Seepage from West ODS-2 and ODS-5 are presently being captured and either spray irrigated back onto the Western ODS or discharged to Skyrocket Pit.

103. SWM-08 is a surface water sampling location on the western side of the Western ODS. SWM-08 samples an intermittent stream directly downgradient of the ODS. This stream discharges into Clover Creek, which flows into Flowers Reservoir. The table below depicts three sampling periods: the 1987-1988 period is pre-mining data, the 1997 data represent the results after overburden was deposited, and the 2006-2007 data represents current data results after the spring at the base of the ODS was captured. Once overburden was placed above SWM-8, sulfate, TDS, and nitrate concentrations increased significantly and the overall water chemistry was significantly different than background. In 2002, sumps were built and water was captured at the bottom of the Western ODS, causing SWM-8 sampling results to return to near background conditions.

SWM-8 Sampling

Constituent	1987-1988 average	1997 10 July 1997	2006-2007 average
TDS (mg/L)	815	3960	1287
Sulfate (mg/L)	348	2090	410
Nitrate (mg/L)	ND (<1)	48	1.7
Calcium	79	459	no analysis
Magnesium	41	305	no analysis
Sodium	229	163	no analysis
Months flowing per year*	<6	10-12	<6

* These are estimated months based on whether a sample was taken or not.

104. The table below shows sampling results from March 1998 at SWM-8, and at West ODS 1, 2, 4 and 5. Note the concentrations at SWM-8 are comparable to the concentrations from West ODS seeps. When these values are compared to pre-mining surface water concentrations from SWM-08, a significant concentration difference is apparent. The Discharger has performed water balance and TDS loading analyses that indicated the source of the captured flows at the ODS sampling locations is from both meteoric water infiltrating the ODSs and groundwater seepage. The Western ODS seep locations continue to show impacts as of 2007. As discussed above, ODS seep water is being captured by sumps and concentrations at SWM-08 appear to be returning to background concentrations.

Surface Water and Western ODS Seepage Monitoring Results (March 1998)

Constituents	SWM-8	West ODS-1	West ODS-2	West ODS-4	West ODS-5
TDS (mg/L)	3360	4720	3540	4110	4630
Sulfate (mg/L)	1990	3080	2120	2530	2400
Nitrate as N (mg/L)	34	<0.02	41	11.9	30
Chloride (mg/L)	63	35	51	78	153
Selenium (mg/L)	0.024	<0.001	0.027	0.014	0.041

Western ODS Groundwater

105. Groundwater has been impacted by releases from the Western ODS. Well GMW-19 shows approximately a three to six fold increase in TDS, sulfate, nitrate and selenium from pre-mining data, as shown below. The observed changes in monitoring well GWM-19 are similar to the changes in water quality at SWM-8, indicating the source of the water affecting groundwater quality is likely the same. Another change in the water chemistry of GWM-19 is that chloride decreased almost four-fold, indicating chloride was diluted by a new source water. This decrease in chloride is consistent with leachate coming from a mostly greenstone overburden waste rock, which is low in chloride relative to a phyllite ocean deposit, which is high in chloride. The changes discussed here are typical of mining, which indicates the water sampled from GWM-19 in 2006 and 2007 contains leachate from the Western ODS. The area around MW-19 is relatively low permeability bedrock. Degraded groundwater in the vicinity of MW-19 and the Western ODS has not been defined west of the WMU.

Western ODS Groundwater Sampling (GMW-19)

Constituent	GMW-19 1989 average	GMW-19 2006-2007 average
TDS (mg/L)	1113	3122
Sulfate (mg/L)	282	1995
Nitrate (mg/L)	<1 (ND)	6.3
Chloride (mg/L)	189	52
Selenium (ug/L)	<5 (ND)	27

106. The groundwater monitoring system is not adequate for monitoring the 125 acre ODS. The western boundary of the ODS has no groundwater monitoring wells to evaluate groundwater quality. GMW-20 appears to be a side gradient well and GMW-16 is greatly influenced by the North Pit groundwater sink and may be minimally effective at monitoring the northeast edge of the ODS. GMW-19 appears to monitor only the southeast flowing groundwater from the northwestern part of this ODS. Therefore, these WDRs require a lateral and vertical groundwater extent determination in accordance with Title 27 Section 20425 and a plan to fill any data gaps in the groundwater monitoring system.

Flotation Tailing Reservoir ODS (General)

107. The FTR ODS is on the facility's eastern side with Littlejohns Creek flowing along its southeastern flank and the FTR on its northwestern side. This ODS received overburden waste rock from Skyrocket Pit and North Pit. This unit has impacted groundwater and surface water as discussed in Findings 78 through 81.

Leached Concentrate Residue Facility (WMU #2)

108. The 18-acre LCRF is divided into two portions, which together comprise the Group B waste management unit. Approximately 6 acres of the northern part of the facility encompasses the lined heap leach pile. The remaining 12-acre southern portion, separated by a liner system, impounds the leached concentrate residue (LCR).

109. Liquid in the LCRF was previously classified as Group B mining waste per Title 27 based on expected pH and free cyanide concentrations. Leached concentrates (solids) stored in the LCRF were also classified as Group B mining waste per Title 27 based on an acid generating potential of 668 tons of CaCO₃ equivalent per 1000 tons of ore.

110. The LCRF contains 186,400 tons of leached concentrate residue. The LCRF is lined with a two foot thick clay layer installed to a hydraulic conductivity of less than 1×10^{-6} cm/sec; a 40-mil Very Low Density Polyethylene (VLDPE) liner; and geotextile layer as a filter layer over the underlying clay.

111. The LCRF has been closed in accordance with Title 27. The Discharger was granted final closure for this unit in a letter dated 28 July 2005. Closure consists of (from top to bottom) a 6-inch thick vegetative soil cover, a one-foot thick FTR tailings layer, a geocomposite drainage layer, and a foundation layer. Surface water improvements have also been incorporated into the final closure cover and consist of a center drainage swale, a breached embankment, and rip-rap spillway.

112. Liquids generated from the LCRF are collected by a LCRS system constructed with a one-foot thick layer of gravel between two geotextiles and a network of

perforated pipes. The LCRF/LCRS drains to the lower Process Water Pond (PWP) and is evaporated.

113. Since early 2007, leachate flowed out of the unit and into the LCRS at a rate of approximately 0.03 gpm. This value falls within the range of levels defined as negligible. The most recent RWD proposes to abandon the LCRS by pumping grout in the LCRS pipe system. However, plugging of the LCRS is not acceptable since the drainage will back-up into the waste and cause a head on the liner. This will increase the leakage rate from the unit, causing an impact or threatening to impact groundwater and surface water. Therefore, this Order requires that the Discharger continue to collect and properly dispose of leachate collected in the LCRS.

Process Water Pond (WMU #3)

114. Liquid stored in the PWP was previously classified as Group A mining waste based on hazardous concentrations of copper and cyanide. The PWP contains 39,000 cubic yards of Group C flotation tailings excavated from the FTR. The base liner system (from bottom to top) consists of a two foot thick layer of clay, a 150-mil geotextile, an 80-mil HDPE geomembrane, a 150-mil geotextile, a one foot thick layer of crushed and washed rock, a 150-mil geotextile, and an 80-mil HDPE geomembrane.
115. The sideslope liner system (from bottom to top) includes a 150-mil geotextile, an 80-mil HDPE geomembrane, and HDPE drain net, and an 80-mil HDPE geomembrane.
116. During the summer and fall of 1999, the Discharger completed an interim closure of the PWP, which consisted of evaporation of wastewater in the PWP to approximately 8 acre-feet, solidification of this remaining brine by placing flotation tailings into the PWP, covering the solidified brine with an impervious liner to prevent contact between rainfall and the underlying materials, and construction of a small (1.3 acre) evaporation pond on the lined surface to collect and evaporate the LCRF and PWPLCRS flows.
117. Based on wastewater quality information provided by the Discharger (described in Finding No. 119), the PWP has been reclassified as a Group B WMU.
118. In its most recent RWD, the Discharger proposes to replace clean closure of the PWP with an in-place closure. In-place closure requires reducing the amount of all free-liquids and placing a cap designed in accordance with Title 27. The in-place design was submitted to staff as Amendment No. 2 of the RWD (dated June 2007).
119. Amendment No. 2 proposes an in-place closure because no active WMUs are available to dispose of materials from the PWP. The Discharger has stated that

reopening the LCRF to place new waste material could affect the integrity of the Title 27 cover system and could also adversely affect the surface drainage pattern.

120. In a letter dated 15 August 2007, staff requested additional information to supplement Amendment No. 2 to quantify the proposed in-place closure of the PWP. A Technical Memorandum, dated 20 August 2007, provides the additional information requested by staff. The memorandum addresses the requirements of Title 27 Section 21400(b)(1) and evaluates the infeasibility of the clean closure option using EPA's "Guidance for Conducting Remedial Investigations and Feasibility Studies under CERCLA," OSWER Directive No. 9355.3-01. The methodology screened and evaluated five alternatives for closing the PWP.
121. The analysis indicates that in-place closure was the highest scoring alternative. In-place closure will provide protection of the environment by keeping the waste encapsulated in a cell that meets current Title 27 requirements.
122. Due to the removal of salt precipitate and dilution by rainfall, the waste contained in the PWP is now considered a Group B waste instead of a Group A waste. The closure plan states that wastewater collected in the LCRS for both the PWP and LCRF will be evaporated in a lined pond constructed on top of the PWP. As shown in the table below, the concentration of key constituents in this wastewater are below the California Hazardous Waste Criteria, and therefore it is appropriate to reclassify this waste as Group B.

Constituent	Units	PWP LCRS		LCRF LCRS		CA Hazardous Waste Classification Criteria
		Min	Max	Min	Max	
pH	number	7.1	8.4	7.2	7.9	≥ 2 to ≤ 12.5
Antimony	mg/l	ND	0.039	ND	0.002	15.00
Arsenic	mg/l	0.0032	0.2	0.0046	0.53	5.00
Chromium	mg/l	ND	8.28	ND	0.08	5.00
Copper	mg/l	ND	0.29	ND	0.3	25.00
Nickel	mg/l	8.26	16.1	8.94	12.9	20.00
Selenium	mg/l	ND	0.0105	ND	0.0248	1.00
Zinc	mg/l	ND	0.4	ND	0.4	250.00

123. The in-place closure of the PWP will be constructed per Title 27 Section 21090(a)(1)(2)(3)(A)(1)(a-d) as follows (from top to bottom):
- A 1.5-ft thick erosion/vegetative layer that sustains vegetation and that will be hydroseeded with the seed mix approved for RMK;
 - A geocomposite drainage layer;

- A 60-mil high-density polyethylene (HDPE) geomembrane that will serve as the low-hydraulic conductivity layer in accordance with Title 27, Section 21090(a)(2);
- A foundation layer at least 2-ft thick; and
- Soil fill as needed to reach the elevation of the base grading plan (i.e. the elevation of the bottom of the foundation layer)

The temporary evaporation pond that will be constructed on top of the PWP will be lined with a 60-mil HDPE geomembrane that is separate from the PWP cover HDPE geomembrane.

124. These WDRs approve the in-place closure of the PWP, based on the RWD and Addendum No. 2 (with supporting documentation).

LCRF and PWP Surface Water

125. Surface water that is in contact with the LCRF is controlled by a graded surface that drains to a perimeter run-on diversion ditch. Surface water monitoring point SWM-11, located at the northern end of the LCRF, has been monitored since 1991. Surface water flow has not been recorded in SWM-11, and consequently, the LCRF and PWP are not causing surface water impacts.

LCRF and PWP Groundwater

126. Groundwater near the LCRF and PWP is monitored by upgradient well GWM-3. The LCRF is monitored downgradient by wells GWM-24. The PWP is monitored by downgradient well GWM-25. Additional wells installed further south of the PWP are also considered as downgradient monitoring points, which include GWM-4 through GWM-6, and GWM-15. GWM-3, GWM-24, GWM-25 were installed in the phyllite. GWM-4, GWM-5, and GWM-15 are greenstone wells.
127. Upgradient groundwater is represented by GWM-3, a phyllite well. TDS has ranged between 210 and 310 mg/l; sulfate has ranged between 4.0 and 29 mg/L; sodium has ranged between 9.4 and 62.2 mg/L; calcium has ranged between 9.4 and 69.8 mg/L; and bicarbonate has ranged between 164 and 488 mg/L.
128. Groundwater from GWM-24 is downgradient of the LCRF and shows water quality changes from mining. TDS has ranged between 300 mg/L to 860 mg/L. The highest TDS concentrations have been reported in the last three sampling events. Sulfate concentrations have ranged between 63 mg/L and 370 mg/L. The highest sulfate concentrations have been reported in the last two sampling events. Sodium has ranged between 21.1 and 89.4 mg/L; calcium has ranged between 42.1 and 160 mg/L, and bicarbonate concentrations have ranged between 172 and 321 mg/l. GWM-24 has reported post-mining exceedences of TDS, sulfate,

and nickel; however, nickel exceedences are due to detection limit changes. Closure of the LCRF has improved surface drainage so that upgradient surface water that previously infiltrated is now diverted around the WMU. This reduced infiltration can be contributing to the change in groundwater quality. Arsenic also appears to be increasing in GWM-24 since July 2002. Arsenic concentrations have ranged between 0.0007 and 0.0086 mg/L.

129. Groundwater from well GWM-25 is collected downgradient of the PWP. TDS concentrations have ranged from 440 to 2,140 mg/L; sulfate has ranged between 89 and 1,040 mg/L; sodium has ranged between 22 and 57.1 mg/L; calcium has ranged between 99 and 506 mg/L; and bicarbonate concentrations have ranged between 208 and 559 mg/L. The highest concentrations detected were reported after mining had started and are impacts related to mining. Post-mining exceedences have been reported for Nitrate and pH in well GWM-25.
130. Groundwater near wells GWM-4 through GWM-6 were evaluated. TDS concentrations have ranged between 150 and 1,410 (GWM-5) mg/L; sulfate concentrations have ranged from 21.3 to 521 (GWM-5) mg/L; sodium concentrations have ranged from 8.3 to 54.6 (GWM-5) mg/l; calcium ranged between 46.8 and 325 (GWM-5) mg/L; and bicarbonate concentrations have ranged from 171 to 381 (GWM-5) mg/L. Increases in concentrations in GWM-05 occurred from 1993 to 1994 time frame, at the end of active mining. Although constituent concentrations vary between the three wells, it is apparent that GWM-5 has been affected either by disturbance, fill with overburden, changes in recharge, changes in groundwater flow due to excavation of North Pit, or from releases from the LCRF and PWP.
131. The LCRF and PWP may have impacted groundwater quality, although the principal indicator constituents for leachate from these units have not been detected (i.e. nickel and copper). The corrective action for these impacts is closure of both of these units per Title 27. The LCRF has been closed per Title 27 and PWP closure plan complies with Title 27. The implementation of the PWP closure plan has already started and will be completed in the year 2008.

Skyrocket Pit Lake

132. From September 1993, when the mining of Skyrocket Pit ceased, until April 1999, Skyrocket Pit was a hydraulic sink, drawing in poor quality groundwater from the west and good quality water from the east. Although the combined groundwater flowing into Skyrocket Pit has concentrations of some constituents of concern, which exceed water quality objectives, Skyrocket Pit was previously classified as a Group C mine WMU.
133. In response to the winter-time surface water discharges from the ODSs, in December 2004, the Discharger proposed revisions to its Storm Water Pollution Prevention Plan to cover the discharges under its NPDES General Industrial

Storm Water Permit. In March 2005, staff responded that the discharge of Group B ODS water to surface waters cannot be covered by the General Permit and rejected the closure plan. By letter dated 29 November 2005, the Discharger stated that its existing ODS recirculation systems may pose a threat to water quality when operated in conjunction with severe wet weather conditions.

134. On 2 February 2006, the Executive Officer signed Time Schedule Order (TSO) No. R5-2006-0900. The TSO was requested by the Discharger “to transfer captured Group B seepage water from the Overburden Disposal System (“ODSs”) to Skyrocket Pit Lake both to protect water quality and to provide a means of gathering specific data in support of Meridian’s submitted NPDES permit application and proposed permanent revisions to the WDRs in connection with that application.” The transfer of this water began on 7 January 2006.
135. The three ODS springs contain elevated concentrations of sulfate, selenium, nitrate and TDS relative to Skyrocket Pit Lake as shown below. The springs (leachate) are considered a Group B mine waste and a threat to water quality.

Discharge Concentrations to Skyrocket Pit Lake

		Gold Knoll	West ODS2	West ODS5	Skyrocket Pit Lake
Constituent	Units	Median 2004-2005	Median 2006-2007	Median 2006-2007	Median 2006-2007
TDS	mg/l	7,406	3,557	4,378	2,615
Sulfate	mg/l	5,520	2,150	2,150	1,013
Nitrate	mg/l	30	18	8.8	2.6
Selenium	ug/l	70	18	28	9

136. The transfers of captured spring flows were halted in April 2006 since heavy rains and transfers caused the pit lake to encroach on the freeboard elevation required by WDRs No. 5-01-040. This condition agrees with the modeled water level presented in the 17 October 2005 RWD.
137. To alleviate the lack of freeboard in Skyrocket Pit, the Discharger initiated a contingency plan that included transferring Skyrocket Pit Lake water to North Pit Lake and constructed enhanced evaporation systems (i.e. floating spray system and Turbomister) on Skyrocket Pit Lake and North Pit Lake. The pit lake level dropped relatively rapidly once the transfers were stopped and the contingency measures were implemented.
138. Due to the short transfer period, chemical changes to Skyrocket Pit Lake water are difficult to discern. The April 2007 report suggests the only noticeable changes are decreases of nitrate and possibly nickel. Nitrate was predicted to decrease due to primary production in the pit lake. The change in nickel may be related to analytical variability.

139. In accordance with the TSO No.R5-2006-0900, continuous flow data for specific locations were to be recorded and evaluated for Gauge Station #2 (TSWM-1), #3 (SWM-15), #5 (SWM-10), and #6 (SWM-16). However, the April 2007 report does not provide continuous flow data for Gauge Station #2 (TSWM-1) or #3 (SWM-15). TSWM-1 is located below the confluence of Littlejohns Creek and Littlejohns Creek Diversion. This location is critical to evaluating total surface water flows discharging from the site. SWM-15 is a critical location to evaluate flows of the mid to upper reaches of Littlejohns Creek Diversion south of the confluence of Underwood Creek.
140. The April 2007 report evaluates constituents of concern over time for SWM-02, SWM-06, SWM-10 and SWM-16. Analytical data does not exist for SWM-16 prior to or during the transfer period. Since no pre-transfer or transfer data exists for SWM-16, concentrations of several COCs appear elevated when compared to SWM-02, SWM-06, and SWM-10. These COCs include TDS, sulfate, arsenic, selenium, and nitrate. All flow recorded at SWM-16 after the transfer period is attributed to Love Pond Spring.
141. Other increases of COCs were evident during and following the transfer period at SWM-02 (sulfate, nitrate, TDS) and SWM-10 (sulfate, nitrate, TDS); however, the Discharger believes these increases are not due to transfers.
142. As described in Finding No. 133, during the transfer period Skyrocket Pit Lake rose approximately two feet to a maximum elevation of 969.88 feet MSL. According to Figure 6 of the most recent RWD, water levels in well PZ-4 mirrored water levels of Skyrocket Pit Lake, indicating that this pit lake influences groundwater gradients along the southeastern shore.
143. Prior to the transfer period, groundwater elevations measured in well GWM-20 (west of Skyrocket Pit Lake) were higher than water levels of Skyrocket Pit Lake. During the transfer period, water levels in the lake increased above GWM-20 reversing groundwater flow toward the west. However, groundwater elevations in GWM-20 did not experience a significant rise compared to lake levels and subsequent measurements indicate a relatively consistent groundwater elevation in GWM-20. Chemically, groundwater in GWM-20 appears to be phyllite type water and is likely isolated from Skyrocket Pit Lake.
144. The water level at Skyrocket Pit Lake appears to influence the groundwater levels at several monitoring wells, and the groundwater gradients in those areas. Wells GWM-36A/B are located northeast of Pit Lake. The wells were constructed between the Pit Lake and Littlejohns Creek Diversion. According to Figure 6 of the RWD, groundwater elevations of wells GWM-36A/B following the transfer period, track the decreasing water levels of the Pit Lake. However, when groundwater elevations of GWM-30 (northeast of GWM-36 A/B) are compared to Pit Lake levels during the transfer period, it appears groundwater elevations remain higher than water levels of the Pit Lake and that groundwater flows toward wells GWM-36A/B. This is consistent with historical data.

145. When chemical data of wells GWM-36A/B is compared to well GWM-30, it appears that groundwater near well GWM-36A/B is dominated by flow from GWM-30 area. Chemically, the groundwater constituents concentrations are similar as would be expected. Groundwater in well GWM-36A has higher concentrations of same COCs as GWM-36B. However, GWM-36B is a shallow well that is likely influenced by surface water infiltration.
146. Groundwater gradients influenced by transfers of captured spring flows from the ODSs to Skyrocket Pit Lake seem to be limited to select wells located east and southeast of the Pit Lake. During the transfer period, there could have been some possible influence toward the northeast but this extent was also limited.
147. Transfers into Skyrocket Pit Lake ceased in April 2006, resumed in December 2006, and continued until April 2007. The 2006/2007 wet season was drier than normal and the risk to overtopping decreased. During the 2006/2007 wet season, a net of 25.7 acre-feet was transferred into Skyrocket Pit Lake.
148. On 6 February 2007, the Executive Officer signed TSO No. R5-2007-0900 addressing possible wet weather discharges from Skyrocket Pit Lake to Littlejohns Creek. TSO No. R5-2007-0900 superceded TSO No. R5-2006-0900. The Discharger did not utilize the emergency discharge provision and did not discharge from Skyrocket Pit. To permanently reduce the lake level to the proposed operating level, the Discharger has obtained NPDES Order No. R5-2007-0162.
149. To control overtopping and lessen the dry season discharge of pit lake water to Littlejohns Creek Diversion, the Discharger has proposed a Skyrocket Pit Lake operating level between 955 and 960 feet MSL. This proposed operating level is based on field observations of gradients, water quality, and flows. The Discharger proposes to refine the maximum operating pit levels within the first years of operation (2008 through 2011), as the proposed NPDES discharges are undertaken. The proposed operating level of 955 to 960 feet MSL is mainly to prevent discharges to Littlejohns Creek Diversion and does not fully consider potential discharges to groundwater downgradient of pit lake dam. In the long term, in the event constituent concentrations in Skyrocket Pit Lake become too concentrated for future NPDES discharges, the Discharger will need to identify and implement contingency measures.
150. Skyrocket Pit Lake is a mine pit now filled with groundwater, precipitation, water from the Flotation Tailings Reservoir, and water from the ODSs. Because the Discharger is currently discharging Group B waste into the pit lake and because the pit lake contains constituents at concentrations that could impact groundwater quality on the east side of the pit, a strict interpretation of Title 27 would require that the pit lake be managed as a Group B mining unit. However, because the Discharger will manage the site such that pit lake water will not enter surface waters, and will propose an engineered alternative for groundwater impacts, Skyrocket Pit Lake is conditionally determined to remain a Group C WMU. However, if conditions change from the above, then the Regional Water Board will consider reclassifying Skyrocket Pit Lake to a Group B WMU.

North Pit Lake

151. North Pit Lake is not a classified waste management unit and no further closure action is proposed in the RWD or required by this Order. North Pit Lake has reached an equilibrium level of approximately 1030 feet MSL.

FACILITIES AND GENERAL SITE CLOSURE PLANS

152. The plant area included a heavy equipment maintenance shop, ore crusher and conveyer, beneficiation plant, mill office and metallurgical laboratory, explosives storage area, fuel storage area, access and haul roads, fencing, aboveground utility and communication lines, underground water lines, underground utility and communication lines, sewer disposal facilities, and electrical substation. The mill building, its contents and associated equipment have been dismantled and removed down to the concrete foundation. The machinery, tanks, products and miscellaneous structures have been removed from the plant area for reuse elsewhere. The maintenance shop will be retained for use during the closure and postclosure period, and for future alternative land uses. Inert materials have been recycled offsite or will be disposed on site in the designated inert material disposal area in the FTR. Other materials such as tanks, conveyors, motors, and pipes have been transported offsite for reuse.
153. The majority of the site area including the access roads, haul roads, the disturbed areas adjacent to the pits, the WMUs and the plant area has been or will be generally reclaimed, while certain access roads will be left in place for potential future long-term uses.
154. Concrete foundations will remain in place, cleaned, and covered with a minimum of two feet of overburden material. Utilities such as power and telephone lines may be removed for offsite recycling or disposal.
155. The plant area and the disturbed areas adjacent to the plant area, the Administrative Building area parking lot and other disturbed areas have been graded to drain towards either natural drainage courses or site drainage ditches that will be constructed.
156. Mine revegetation/habitat restoration modes are identified in the closure plans. They include revegetation of pit slopes above the final pit lake levels, pit lake habitat enhancement, revegetation of the FTR and LCRS areas, revegetation of serpentine exposure areas, re-establishment of wildlife habitat surrounding the pit areas, and maintenance of the wetland ponds that have been created in the Littlejohns Creek diversion.

Postclosure Maintenance

157. Postclosure surface water monitoring will begin when the FTR and LCRF/PWP have been certified closed and reclaimed. At that time, the sampling locations,

constituents of concern, and frequency of monitoring during the postclosure maintenance period may be modified from the requirements currently found in this Order.

158. The closure period for each ground water monitoring point ends when each waste management unit is reclaimed, certified closed and a determination is made by the Regional Water Board that there is no longer a threat to water quality.
159. Surface and ground water monitoring stations will be maintained during the postclosure maintenance period until there is no longer a threat to water quality.

Postclosure Land Use

160. As indicated in the Mine Use Permit and Reclamation Plan, the reclaimed mine site will be suitable for wildlife habitat, range, and firewood resource.
161. The pit lakes could be utilized for fishing depending upon public safety, the final water quality, and the result of habitat suitability evaluations. There is the potential that portions of the area can be used for residential properties and industrial activities.
162. Access roads to key points within the main site area will remain. The two pit lake areas have been fenced and signs posted to prevent access by trespassers. The closed LCRF/PWP is also fenced and posted to limit access and possible damage to the cover.
163. Deed restrictions will be attached to the property to prevent unacceptable land uses and to assure the integrity of the waste management units.

Erosion Control and Reclamation Plans

164. The Discharger is implementing an erosion control and reclamation plan subject to these waste discharge requirements, the requirements of the Surface Mining and Reclamation Act of 1975 (SMARA), the annual SMARA reporting requirements of §2207 of the Public Resources Code, and Title 14, CCR, Chapter 8, Subchapter 1, Article 1.

FINANCIAL ASSURANCES

165. The Discharger has provided financial assurances in the form of an irrevocable Letter of Credit in the amount of \$3.302 million for the closure and postclosure maintenance of the facility. The RWD contains an updated cost estimate for long-term operation and maintenance at a cost of \$3.238 million, which assumes completion of the capital construction projects associated with the RWD closure plan.

166. In accordance with Title 27, Section 22510(f), the Discharger shall provide for adequate funding to pay for the costs of closure and post closure maintenance. These WDRs require the Discharger to update the Financial Assurances.

CEQA CONSIDERATIONS

167. In January 1988, the Calaveras County Planning Commission adopted a Final Environmental Impact Report (EIR), in accordance with the California Environmental Quality Act (Public Resources Code Section 21000, et seq.) and State guidelines. The project may have the following significant impacts on water quality: (a) contaminated runoff and leachate could impact surface and ground water; (b) mining and construction activities could cause siltation of surface waters. Calaveras County has approved a general plan of development for the project and has issued a Use Permit for the project.
168. The Regional Water Board has reviewed the EIR. Compliance with these waste discharge requirements will mitigate or avoid the significant impacts on water quality in the following manner: (a) The threat of surface and ground water degradation from contaminated runoff and leachate will be mitigated by construction of the facilities; and (b) Siltation of surface waters from mining and construction activities will be mitigated by implementing the erosion control and reclamation program.
169. The Regional Water Board adopted a negative declaration for the treatment and transfer of LCRF/PWP to FTR and the transfer of FTR fluids to the Skyrocket Pit on 4 August 1994 in accordance with the California Environmental Quality Act (Public Resources Code Section 21000, et seq.), and Title 14, CCR, Section 15301. Based on information at the time, the Regional Water Board found this project would not have an adverse effect on the environment. Modeling conducted in 1994 by the Discharger on water levels in Skyrocket Pit indicated the pit would not overtop and pit water would not migrate out of the pit at a significant rate. Since then the water level in Skyrocket Pit has increased significantly above the predicted 940-foot water elevation and seepage from the pit has increased flows and concentrations of sulfate and TDS in the Littlejohns Creek Diversion. However, the requirements of this Order and the companion NPDES Order should negate these impacts.

OTHER LEGAL REFERENCES

170. Section 13267 of the California Water Code provides that: *"In conducting an investigation specified in subdivision (a), the regional board may require that any person who has discharged, discharges, or is suspected of having discharged or discharging, or who proposes to discharge waste within its region, or any citizen or domiciliary, or political agency or entity of this state who has discharged, discharges, or is suspected of having discharged or discharging, or who proposes to discharge, waste outside of its region that could affect the quality of waters*

within its region shall furnish, under penalty of perjury, technical or monitoring program reports which the regional board requires. The burden, including costs, of these reports shall bear a reasonable relationship to the need for the report and the benefits to be obtained from the reports. In requiring those reports, the regional board shall provide the person with a written explanation with regard to the need for the reports, and shall identify the evidence that supports requiring that person to provide the reports.”

171. The technical reports required by this Order and the attached “Monitoring and Reporting Program No. R5-2008-0021” are necessary to assure compliance with these waste discharge requirements. The Discharger owns and operates the facility that discharges the waste subject to this Order.
172. Section 13263.1 of the California Water Code states: "Before a regional board issues or revises waste discharge requirements pursuant to Section 13263 for any discharge of mining waste, the regional board shall first determine that the proposed mining waste discharge is consistent with a waste management strategy that prevents the pollution or contamination of the waters of the state, particularly after closure of any waste management units for mining waste." It is unclear whether section 13263.1 applies to post-closure requirements. This section appears only to apply to proposed discharges where there is active mining or active land disturbance, in order to ensure (among other things) that there won't be post-closure pollution or contamination. Section 13260(k), part of the same bill that enacted section 13263.1, is clear that its requirements are for active mining discharges only. These WDRs are considered interim in nature, and require the Discharger to submit and implement plans for a final site-wide closure that will prevent pollution or contamination of waters of the state. The Regional Water Board finds that this waste management strategy complies with section 13263.1, assuming that section is applicable.
173. This Order implements:
- the Water Quality Control Plan, Fourth Edition, for the Sacramento River Basin and the San Joaquin River Basin, and
 - the prescriptive standards and performance goals of Title 27, California Code of Regulations, Division 2, Subdivision 1, effective July 1997, and subsequent revisions.
174. The Regional Water Board has notified the Discharger and interested agencies and persons of its intention to prescribe waste discharge requirements for this discharge and has provided them with an opportunity for a public hearing and submittal of their written comments and recommendations.
175. All of the above, and the supplemental information and details provided in the attached Information Sheet, which is incorporated by reference herein, were considered in establishing the following conditions of discharge.

176. In a public hearing, the Regional Water Board heard and considered all comments pertaining to the discharge.

IT IS HEREBY ORDERED pursuant to Sections 13263 and 13267 of the California Water Code, Order No. 5-01-040 is rescinded and Royal Mountain King Mine, Meridian Beartrack Company, Meridian Gold Company, and Felix Mining Company, in order to meet the provisions of Division 7 of the California Water Code and the regulations adopted thereunder, shall comply with the following:

A. PROHIBITIONS

1. The discharge of 'hazardous waste', 'designated waste', 'Group A' and 'Group B' mining waste unless otherwise specified in these WDRs is prohibited. For the purposes of this Order, the terms 'hazardous waste', 'designated waste', 'Group A' and 'Group B' mining waste are as defined in Division 2 of Title 27 of the CCR.
2. The discharge of solid waste or liquid waste to surface waters, surface water drainage courses, or groundwater is prohibited except as specified by this Order and as described in NPDES Order No. R5-2007-0162.
3. The discharge of wastes outside of a waste management unit or portions of a waste management unit specifically designed for their containment is prohibited.
4. The discharge of wastes to the FTR and LCRF is prohibited.
5. The discharge of waste into Skyrocket Pit Lake except as specified by this Order is prohibited.
6. Gold Knoll ODS and Western ODS Land Application Areas
 - The discharge of solid or liquid waste, leachate, treated groundwater, or tailwater from the land application area to surface waters, surface water drainage courses, or groundwater is prohibited.
 - The application of spring or seepage water from the Golden Knoll ODS or Western ODS collection systems to a location other than Skyrocket Pit or directly on top of these ODSs is prohibited.
 - Land application of wastewater to any area that does not have a fully functional runoff return and control system is prohibited.

B. DISCHARGE SPECIFICATIONS:

General Specifications

7. Wastes shall only be discharged into, and shall be confined to, the waste management units (WMUs) specifically designed for their containment.
8. The treatment or disposal of waste shall not cause pollution or a nuisance as defined in the California Water Code, Section 13050.
9. The discharge of wastes shall not cause water quality degradation by allowing a statistically significant increase over background or baseline concentrations.
10. Waste materials shall be confined to the waste management units designated for that waste as shown on Attachment B except as specified by this Order.
11. All under-drains and LCRS drains within the PWP and LCRF shall remain open and free flowing. Any mining waste collected in these drains and LCRSs shall be contained and disposed of in a manner allowed by Title 27 and these WDRs.
12. Liquid detected in an LCRS shall be measured, sampled and returned to the waste management unit that it came from or otherwise managed in accordance with Regional Water Board approved methods. The Discharger may discharge the LCRF LCRS leachate flows to the PWP.
13. Detection of any processing chemicals or breakdown products, which are not naturally occurring and which are not due to the discharge of this waste at any point outside of the disposal facilities shall constitute a violation of this Order.
14. This Order allows the Discharger to reduce the Skyrocket Pit Lake level by spray irrigation over the top of the Gold Knoll ODS and Western ODS, or on the pit walls of Skyrocket Pit Lake in the event water levels in Skyrocket Pit Lake rise such that water flows into the Littlejohns Creek diversion. This event is considered an emergency condition, and therefore the Discharger is allowed to initiate spray irrigation or enhanced evaporation to reduce the Pit Lake water levels. In initiating the emergency spraying, the Discharger shall:
 - a. Notify Regional Water Board staff 24 hours prior to initiating emergency response and/or spray irrigating.
 - b. Cease spray irrigation 24 hours prior to, during, or 24 hours after a rain event, or when the ground is saturated.
 - c. Collect any tailwater from the land application area(s) and return it to the WMU(s) or to Skyrocket Pit Lake.

- d. Manage land application areas to prevent breeding of mosquitoes and other vectors. Specifically: (a) All wastewater applied to land must infiltrate completely or drain back to spring and seepage collection systems or other constructed tailwater collection and control systems, (b) Low-pressure pipelines, unpressurized pipelines, and ditches that are accessible to mosquitoes shall not be used to store wastewater, and (c) Tailwater collection system shall be maintained essentially free of emergent, marginal, and floating vegetation.
- e. Manage any tailwater/wastewater storage ponds to prevent breeding of mosquitoes. Specifically (a) Erosion control measures shall be implemented to minimize small coves and irregularities around the perimeter of the water surface, (b) Weeds within and around the perimeter of the pond shall be minimized through control of water depth, harvesting, or herbicides, and (c) Dead algae, vegetation, and debris shall not accumulate on the water surface.

Protection From Storm Events

- 15. All waste management units shall be designed, constructed and operated to prevent inundation or washout due to flooding events with a 100-year return period.
- 16. All waste management units' precipitation and drainage control systems shall be designed, constructed and maintained to accommodate the anticipated volume of precipitation and peak flows from surface runoff under 25-year, 24-hour precipitation conditions.
- 17. Annually, prior to the anticipated rainy season, any necessary erosion control measures shall be implemented, and any necessary construction, maintenance, or repairs of precipitation and drainage control facilities shall be completed to prevent erosion or flooding of the site.
- 18. To comply with federal regulations for stormwater discharges promulgated by the U.S. EPA, the Discharger shall continue to maintain coverage under the State Water Board's Water Quality Order No. 97-03-DWQ, and shall conduct the monitoring and reporting as required therein.
- 19. During closure and post-closure maintenance, the following shall be complied with: (a) erosion control and surface flow containment facilities shall be constructed and maintained to prevent siltation of surface waters; (b) all exposed cuts and fills shall be compacted, reseeded, and adequately watered to initiate and sustain plant growth as soon as practicable, (c) disturbed areas of roadway shall be water barred as necessary and drained onto undisturbed areas with erosion control; (d) there shall be no removal of vegetation nor disturbance of natural soil conditions except where measures that will prevent erosion discharge to surface waters or storm drainage systems are installed and operational prior to

15 November annually or where measures are installed and operational prior to the removal or disturbance; and (e) the Discharger shall submit for approval by **15 October** annually, an erosion control plan and the annual mining reclamation report pursuant to SMARA regulations.

PWP, LCRF and FTR Specifications

20. There shall be no permanent ponding of any liquid on top of the leached concentrates in the LCRF or the FTR. Any water that has contacted the leached concentrates of the LCRF shall be contained in PWP.
21. Surface drainage from diverted tributary areas shall not contact FTR, LCRF, or PWP mining waste.
22. Leachate generation in LCRF and PWP shall not exceed 1,000 gpm or 2000 gpd. If leachate exceeds these values, then the Discharger shall notify the Regional Water Board in writing within seven days. Notification shall include a reassessment of the leak's impact on the integrity of the lower liner, and timetable for remedial action. The Regional Water Board may require repair of the inner liner of the impoundment or other action necessary to reduce or eliminate leachate production.
23. Measures shall be taken to assure that unauthorized persons and animals are effectively excluded from LCRF and PWP.
24. The Discharger shall test the PWP and LCRF LCRSs at least annually to demonstrate proper operation.
25. The in-place closure of the PWP will be constructed in compliance with Title 27 Section 21090(a)(1)(2)(3)(A)(1)(a-d), and will contain (from top to bottom):
 - A 1.5-ft thick erosion/vegetative layer that sustains vegetation and that will be hydroseeded with the seed mix approved for RMK;
 - A geocomposite drainage layer;
 - A 60-mil high-density polyethylene (HDPE) geomembrane that will serve as the low-hydraulic conductivity layer in accordance with Title 27, Section 21090(a)(2);
 - A foundation layer at least 2-ft thick; and
 - Soil fill as needed to reach the elevation of the base grading plan (i.e. the elevation of the bottom of the foundation layer)

The temporary evaporation pond constructed on top of the PWP will be lined with a 60-mil HDPE geomembrane that is separate from the PWP cover HDPE geomembrane.

Skyrocket and North Pit, and ODSs Specifications

26. Leachate generated by any Group B ODS WMU may be captured and discharged into Skyrocket Pit.
27. Surface drainage from diverted tributary areas shall not contact the overburden disposal units, low grade ore stockpile areas, Skyrocket Pit, or North Pit.
28. By **30 April 2011**, the Discharger shall maintain the surface elevation of Skyrocket Pit Lake at 955 msl or that value which prevents Skyrocket Pit Lake water from flowing into the Littlejohns Creek Diversion.
29. After 30 April 2011, if the elevation of Skyrocket Pit Lake exceeds 955 msl or that value which prevents Skyrocket Pit Lake water from flowing into the Littlejohns Creek Diversion, then within **90 days** the Discharger shall submit a report evaluating whether complete containment was provided during this period and if not, describe the contingency measures that were implemented to eliminate Skyrocket Pit Lake water from flowing into the Littlejohns Creek Diversion.

Waste Management Unit Construction

30. Measures shall be taken to ensure that synthetic liners are not punctured for the period during which the waste/processing material contained therein poses a threat to water quality.
31. The LCRSs shall be designed, constructed, and maintained to collect twice the anticipated daily volume of leachate generated by the WMU and to prevent the buildup of hydraulic head on the outer liner at any time. The depth of fluid in PWP LCRS sump shall be kept at or below one-foot.
32. With the exception of the ODSs caps over any Group B Mining Waste shall have a maximum hydraulic conductivity of $<1 \times 10^{-6}$ cm/sec unless otherwise specified and a minimum relative compaction of 90 percent. Hydraulic conductivities shall be determined through laboratory tests confirmed by field testing of the actual cap. Construction methods and construction quality assurance procedures shall be sufficient to insure that all parts of the cap meet the hydraulic conductivity and compaction requirements.
33. The Discharger shall submit for approval, a Construction Quality Assurance (CQA) Plan at least 90 days prior to any WMU containment construction.

Supervision and Certification of Construction

34. WMUs shall be designed and constructed under the direct supervision of a California registered Civil Engineer or a Certified Engineering Geologist and shall

be certified by that individual as meeting the prescriptive standards and performance goals of Title 27 prior to waste discharge.

Waste Management Unit Closure Specifications

35. WMUs shall be closed according to an approved closure and post-closure maintenance plan which implements §22510 of Title 27.
36. The closure and post-closure maintenance plan shall provide for continued compliance with the applicable standards of Title 27 for waste containment, precipitation and drainage controls, and monitoring throughout closure and the postclosure maintenance period.
37. Closed WMUs shall be provided with at least two permanent monuments, installed by a licensed land surveyor, from which the location and elevation of all wastes, containment structures, and monitoring facilities can be determined throughout the postclosure maintenance period.
38. Closed WMUs, which require caps, shall be graded as described in these WDRs and maintained to prevent ponding and promote revegetation.
39. Closed areas with slopes greater than 10%, surface drainage courses, and areas subject to erosion by wind or water shall be designed and constructed to prevent erosion.

D. FINANCIAL ASSURANCE

1. Beginning **30 April 2008**, and thereafter by 30 April each year, the Discharger shall establish cost estimates for initiating and completing corrective action for all known or reasonably foreseeable releases from the mine site, and submit these estimates for review and approval to the Regional Water Board. In addition, the Discharger shall obtain and maintain assurances of financial responsibility for initiating and completing such corrective action for all known or reasonably foreseeable releases from the mine site in the amount approved by the Regional Water Board, as submitted in the Discharger's cost estimates. If the Regional Water Board determines that either the amount of coverage or the mechanism is inadequate, then within 90-days of notification, the Discharger shall submit an acceptable mechanism for at least the amount of the approved cost estimate.

2. The Discharger is required to maintain financial assurance mechanisms for post-closure maintenance cost as specified in Chapter 6 of Title 27. The Discharger is required to submit the financial assurance mechanism for post-closure maintenance to the Regional Water Board. If the Regional Water Board determines that either the amount of coverage or the mechanism is inadequate, then within 90 days of notification, the Discharger shall submit an acceptable mechanism for at least the amount of the approved cost estimate.
3. By **1 June 2008**, the Discharger shall submit a post closure maintenance cost estimate and mechanism for the PWP and LCRF. Within 90 days of staff approval, the Discharger shall show that it has been funded.
4. By **1 December 2009**, the Discharger shall provide proof to the Board that the deed to the mine facility property, or some other instrument that is normally examined during a title search, has been modified or recorded to include, in perpetuity, a notation to any potential purchaser of the property stating that:
 - a) The parcel has been used as a mine site;
 - b) Group A, Group B, and Group C mine waste has been discharged at this site;
 - c) Use options for the parcel are restricted in accordance with the WDRs for the mine site;
 - d) In the event that the Discharger defaults on carrying out either the post-closure maintenance plan or any corrective action program needed to address a release, then the responsibility for carrying out such work shall fall to the property owner; and the notation must be approved by the Regional Water Board.
5. The Discharger shall update the final Post-Closure Maintenance Plan any time there is a change that will increase the amount of the post-closure maintenance cost estimate. The updated final Post-Closure Maintenance Plan shall be submitted to the Regional Water Board. The updated final PCMP shall meet the requirements of Title 27 CCR §21769(b), and include an estimate of the cost of carrying out all actions necessary to carry out the first thirty years of post-closure maintenance.

PROVISIONS:

1. The Discharger shall comply with the Standard Provisions and Reporting Requirements, dated September 2003, which are hereby incorporated into this Order. The Standard Provisions and Reporting Requirements contain important provisions and requirements with which the Discharger must comply. A violation of any of the Standard Provisions and Reporting Requirements is a violation of these waste discharge requirements.

2. The Discharger shall comply with Monitoring and Reporting Program No. R5-2008-0021, which is attached to and made part of this Order. This compliance includes, but is not limited to, maintenance of waste containment facilities and precipitation and drainage controls and the monitoring of groundwater, the unsaturated zone, and surface waters throughout the active life of the waste management units and the post-closure maintenance period. A violation of Monitoring and Reporting Program No. R5-2008-0021 is a violation of these waste discharge requirements.
3. The Discharger shall comply with the notification requirements of §21710(c) of Title 27.
4. These requirements are conditional upon receipt of all local and state permits for the project and are not intended to limit or reduce any obligations or requirements, which are imposed by any other authority having jurisdiction regarding the Project.
5. The Discharger must comply with all conditions of this Order including timely submittal of technical and monitoring reports as directed by the Executive Officer. Violations may result in enforcement action, including Regional Water Board or court orders requiring corrective action, imposition of civil monetary liability, or revision or rescission of this Order.
6. The Discharger shall complete the tasks contained in these waste discharge requirements in accordance with the following time schedule. Reports shall be prepared by a registered professional, as required by Provision E.7.
 - a) By **1 March 2008**, the Discharger shall submit a Capture Zone Model workplan for Skyrocket Pit Lake. This groundwater model (not required to be a computer model) shall be based on site data and determine what pit lake elevation is appropriate for containing degraded groundwater and surface water on site. (The containment elevation will likely be different for groundwater and surface water). The model must predict how lowering Skyrocket Pit Lake will affect Love Pond Spring and surrounding groundwater. The model should incorporate normal and above/below normal wet seasons and predict how that will affect discharges from Skyrocket Pit Lake, Love Pond Spring, and Littlejohns Creek diversion flows. This report must also evaluate data needs to physically demonstrate the capture area of Skyrocket Pit Lake. A schedule shall be provided for the construction of any monitoring locations. The report shall also include proposed sampling frequencies and parameters. If the work plan proposes installation of any groundwater monitoring wells, then the work plan must provide the information required in Attachment E, *Requirements for Monitoring Well Installation Work Plans and Monitoring Well Installation Reports*. Any groundwater monitoring wells shall be installed and sampled by fourth quarter 2008.

- b) By **1 April 2008**, the Discharger shall submit a Surface Water Evaluation Monitoring Report that evaluates where data gaps or redundant monitoring points exist in the surface water monitoring system. This report shall include a map of all springs (historic and current) at the facility. This would include natural springs and springs that developed during or after mining. Each spring should be identified whether the spring was a known spring before mining or was identified after mining was started. The report shall include the surveyed creek bed elevation of Littlejohns Creek Diversion from SWM-06 through SWM-10. The creek bed elevation should be measured relative to mean sea level adjacent to the Gauge Stations located within the Littlejohns Creek Diversion. The Report shall also give recommendations for any necessary revisions to the monitoring program.
- c) By **1 May 2008**, the Discharger shall submit a plan and design for permanently upgrading the captured flow collection system at the Gold Knoll ODS. The improvements will be completed within nine months of staff approval of the work plan. An as-built construction report shall be submitted within one month after completion.
- d) By **30 July 2008**, the Discharger shall submit a Groundwater Evaluation Monitoring Report/Work Plan that evaluates where data gaps exist in defining the lateral and vertical extent of groundwater pollution, and in particular evaluate whether wells should be installed in the area described in Findings No. 29 and No. 98. This report shall include a proposal to install additional monitoring wells within the FTR waste and any other wells needed to evaluate or implement the groundwater closure strategy. This report shall also include:
- i) An evaluation of all groundwater monitoring locations and a determination whether the construction of each well is adequate for its designated purpose. For example, if a well is a detection monitoring well at the point of compliance, does the screen cross the water table and is the pump properly located to sample first groundwater?
 - ii) Which monitoring wells should be destroyed because they are not filling a data need or are redundant wells?
 - iii) The report should contain a work plan proposing new well locations to fill the identified data gaps and wells to be destroyed (if any).
 - iv) The work plan shall include the information listed in the first section of Attachment D, "Requirements for Monitoring Well Installation Workplans and Monitoring Well Installation report of Results".
- e) By **30 July 2008**, the Discharger shall submit a groundwater closure strategy report for the entire mine site. This report shall evaluate methods for containing waste onsite or other regulatory methods to achieve compliance including but not limited to a Basin Plan Amendment or a Containment Zone, and shall give a proposed schedule for completing any necessary studies or submitting required documents to the Regional Water Board. Within three

months of staff approval of schedule and proposal, the Discharger shall begin implementing the closure strategy.

- f) By **1 September 2008**, the Discharger shall submit Amendment #3 to the 1996 Closure Plan for closure of the FTR. The document shall discuss the proposed FTR model and whether current conditions of the unit meet the requirements of Title 27 for an Engineered Alternative. The report shall include a definitive discussion supported by scientific data and reasoning whether the proposed closure associated with the FTR comply with Title 27, are protective of water quality, and are protective of the environment. This report shall include an evaluation of the leakage rate from the unit, the hydrogeology of the unit and surrounding groundwater, and information regarding whether leachate has reached the unit's surface and discharged to surface water. If the report concludes that the current unit does not meet the conditions for an Engineered Alternative pursuant to Title 27, then the report shall include a proposal and timelines for activities to bring the FTR into compliance.
- g) By **31 December 2008**, the Discharger shall submit a Monitoring Well Installation Report describing all new groundwater and surface water monitoring points described in Surface Water and Groundwater Evaluation Monitoring Reports and Capture Zone work plan. The first round of groundwater sampling shall take place during the fourth quarter 2008 sampling period. The sampling data and evaluation of that data shall be reported in the fourth quarter 2008 monitoring report required by Monitoring and Reporting Program No. R5-2008-0021. The report shall include the information required by the second section of Attachment E.
- h) By **30 September, 2009**, Discharger shall submit a Skyrocket Pit Lake Level Control Contingency Plan that will provide engineering and operations plans to further lower the lake level in the event a maximum level that prevents migration of lake water to surface waters in Littlejohns Creek cannot be attained in the pit. Such measures may include, but are not limited to; rock grouting, land application on the ODSs and the side slopes in Skyrocket and North Pit, enhanced evaporation systems, and operational changes to the NPDES discharge system.
- i) By **29 October 2010**, the Discharger shall submit a Capture Zone Analysis Report illustrating the area of capture for the Skyrocket Pit Lake based on the Capture Zone Model Work Plan. The measured capture area shall be compared to the groundwater model in the Capture Zone Model Work Plan. A determination shall be made on what Skyrocket Pit Lake level is most appropriate for containing groundwater and preventing discharges to surface water. This report shall also include an evaluation of the final closure plan for the FTR and shall evaluate whether the closure is protective of water quality.

j) By **30 July 2011**, the Discharger shall submit a Comprehensive Management Plan. This Plan will summarize how the various WMUs (LCRF, PWP, FTR, Skyrocket Pit Lake, FTR-ODS, West ODS, and Gold Knoll ODS) were closed or are proposed to be closed. The Plan shall also include the management of all discharges of mine-polluted water and a final site wide solution or management plan. The report shall provide the regulatory basis (i.e. prescriptive or engineered alternative closure) and requirements for the closure. It will also include a summary of the regulatory requirements for the groundwater at the mine site (as described in the "Groundwater Closure Strategy Report," Provision 6(f)). Reports containing the detailed engineering and regulatory analyses need not be included, but shall be referenced. The Comprehensive Management Plan should also include a map with assessors parcel numbers, as well as attachments describing the post-closure site operations, maintenance and monitoring plans for the WMUs and groundwater, which should be formatted to allow for future updates and revisions as necessary. Previous Closure and Post-closure Maintenance Plans developed for specific WMUs need not be included, but should be referenced.

k) Process Water Pond Closure

i) By **1 July 2008**, the Discharger shall complete the construction of the dewatering phase of the closure of the PWP and by **1 August 2008**, the Discharger shall submit a Construction Completion Report that meets the documentation requirements of Title 27 Section 20324(d)(1)(C). The Construction Completion Report shall describe the construction activities carried out during the construction seasons of 2007 and 2008.

ii) By **1 October 2018**, the Discharger shall complete closure of the PWP, which includes closing the evaporation pond, final grading of the cover of the PWP, installation of drainage control and slope protection, and erosion control measures on the final cover. By **31 December 2018**, the Discharger shall submit a Final Closure Documentation Report per Title 27 Section 20324(d)(1)(C).

7. In accordance with California Business and Professions Code Sections 6735, 7835, and 7835.1, engineering and geologic evaluations and judgments shall be performed by or under the direction of registered professionals competent and proficient in the fields pertinent to the required activities. All technical reports specified herein that contain workplans, that describe the conduct of investigations and studies, or that contain technical conclusions and recommendations concerning engineering and geology shall be prepared by or under the direction of appropriately qualified professional(s), even if not explicitly stated. Each technical report submitted by the Discharger shall contain the professional's signature and stamp of the seal.

8. In the event of any change in control or ownership of the facility, the Discharger must notify the succeeding owner or operator of the existence of this Order by letter, a copy of which shall be immediately forwarded to this office. To assume operation as Discharger under this Order, the succeeding owner or operator must apply in writing to the Executive Officer requesting transfer of the Order. The request must contain the requesting entity's full legal name, the state of incorporation if a corporation, the name and address and telephone number of the persons responsible for contact with the Regional Water Board, and a statement. The statement shall comply with the signatory paragraph of the Standard Provisions and state that the new owner or operator assumes full responsibility for compliance with this Order. Failure to submit the request shall be considered a discharge without requirements, a violation of the California Water Code. Transfer shall be approved or disapproved by the Executive.
9. For the purpose of resolving any disputes arising from or related to the California Water Code, any regulations promulgated thereunder, these WDRs, or any other orders governing this site, the Discharger, its parents and subsidiaries, and their respective past, present, and future officers, directors, employees, agents, shareholders, predecessors, successors, assigns, and affiliated entities, consent to jurisdiction of the Courts of the State of California.
10. The Regional Water Board will review this Order periodically and may revise requirements when necessary.

I, Pamela C. Creedon, Executive Officer, do hereby certify the foregoing is a full, true and correct copy of an Order adopted by the California Regional Water Quality Control Board, Central Valley Region on 25 January 2008.

PAMELA C. CREEDON, Executive Officer

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD
CENTRAL VALLEY REGION

CLOSURE MONITORING AND REPORTING PROGRAM NO. R5-2008-0021
FOR
MERIDIAN BEARTRACK COMPANY
MERIDIAN GOLD COMPANY
AND FELIX MINING COMPANY
ROYAL MOUNTAIN KING MINE
CALAVERAS COUNTY

Pursuant to Section 13267 of the California Water Code, the Discharger shall comply with this Monitoring and Reporting Program, and with the companion Standard Provisions and Reporting Requirements, as ordered by Waste Discharge Requirements Order No. R5-2008-0021. Failure to comply with this Program, or with the Standard Provisions and Reporting Requirements dated September 2003, constitutes noncompliance with the WDRs and with the Water Code, which can result in the imposition of civil monetary liability. The Discharger shall not implement any changes to this MRP unless a revised MRP is issued by the Executive Officer.

Monitoring data indicate that mining activities have resulted in continued impacts to groundwater and surface water quality. Concentrations of ammonia, chloride, nitrate, selenium, sulfate, and total dissolved solids (TDS) have been detected in groundwater and surface water at the site, which exceed pre-mining background concentrations or water quality objectives. Previous WDRs required the Discharger to develop evaluation and corrective action programs to mitigate these impacts.

The Discharger shall maintain water quality monitoring systems that are appropriate for detection monitoring, flow monitoring, and corrective action that comply with the provisions of Title 27, California Code of Regulations, Division 2, Subdivision 1 (Title 27), Subchapter 3, Article 1.

A. REPORTING

The Discharger shall report monitoring data and information as required in this Monitoring and Reporting Program and as required in the Standard Provisions and Reporting Requirements. Reports which do not comply with the required format will be **REJECTED** and the Discharger shall be deemed to be in noncompliance with the WDRs. In reporting the monitoring data required by this program, the Discharger shall arrange the data in tabular form so that the date, the constituents, the concentrations, and the units are readily discernible. The data shall be summarized in such a manner so as to illustrate clearly the compliance with waste discharge requirements or the lack thereof. Historical and current monitoring data shall be graphed at least once annually. Graphs for the same constituent shall be plotted at the same scale to facilitate visual comparison of monitoring data. A short discussion of the monitoring results, including notations of any water quality violations shall precede the tabular summaries. Data shall also be submitted in a digital format acceptable to the Executive Officer

Method detection limits and practical quantitation limits shall be reported. All peaks shall be reported, including those which cannot be quantified and/or specifically identified. Field and laboratory tests shall be reported in the quarterly monitoring reports. The results of any monitoring done more frequently than required at the locations specified herein shall be reported to the Regional Water Board.

B. REQUIRED MONITORING REPORTS AND SUBMITTAL DATES

1. Quarterly Groundwater, Vadose Zone and Leachate Monitoring Reports

All Quarterly monitoring reports shall include all water quality data and observation collected during the reporting period and submitted per the **Reporting Due Dates** in Section B.6. of this Monitoring and Reporting Program. At a minimum the sampling and data collection in Sections D. III through IX of this Monitoring and Reporting Program, Standard Provisions and Reporting Requirements (2003), and Waste Discharge Requirements shall be reported.

2. Annual Monitoring Summary Report

The Discharger shall submit an Annual Monitoring Summary Report to the Regional Water Board covering the previous monitoring year. The annual report shall contain the information specified in Standard Provisions and Reporting Requirements (2003), Section VIII.B. of the *"Reports to be Filed with the Board."*

The annual report shall be a comprehensive document assessing groundwater and surface water quality compliance with waste discharge requirements and the pre-mining water quality protection standard over the previous year. Trend analysis graphical plots and statistical comparisons to pre-mining concentration limits shall be included in the annual report for naturally occurring detectable constituents of concern. Proposed updated pre-mining background or baseline concentrations for naturally occurring detectable constituents of concern shall be included in the annual report. The annual report shall also include an isoconcentration map for TDS in groundwater and an evaluation of ground water flow directions including contour maps and/or flow nets of water level data from the past year. Pre-mining groundwater and surface water concentration limits are presented in Table 2.

3. Facility Monitoring Report

Annually, prior to the anticipated rainy season, but no later than **30 September**, the Discharger shall conduct an inspection of the facility. The inspection shall assess damage to the drainage control system, groundwater monitoring equipment (including wells, etc.), and shall include the Standard Observations contained in Section XII.S. of Standard Provisions and Reporting Requirements (2003).

4. Response to a Release

If the Discharger determines that there is new significant statistical evidence of a release (i.e. the initial statistical comparison or non-statistical comparison indicates, for any Constituent of

Concern or Monitoring Parameter, that a release is tentatively identified), the Discharger shall immediately notify the Regional Water Board verbally as to the Monitoring Point(s) and constituent(s) or parameter(s) involved, shall provide written notification by certified mail within seven days of such determination and implement Response to Release section of the Standard Provisions and Reporting Requirements (2003).

5. Water Quality Protection Standard Report

Any proposed changes in a statistical method or concentration limits for a constituent of concern or monitoring parameter a Water Quality Protection Standard Report shall be submitted and include the information required in Section C.1. of this Monitoring Reporting Program. Any changes to Water Quality Protection Standards shall be approved by the Executive Officer in a Revised Monitoring and Reporting Program.

6. Submittal Dates

Quarterly Groundwater, Unsaturated Zone and Leachate Monitoring Reports

Reporting Type	Sampling Frequency and Data Reported	Reporting Period	Report Date Due
Quarterly	Daily, Weekly, Monthly and Quarterly	1 January – 31 March	30 April
		1 April – 30 June	31 July
		1 July – 30 September	31 October
		1 October – 31 December	31 January

Annual Monitoring Summary Report	31 January
Facility Monitoring Report	15 November
Response to a Release	as necessary
Water Quality Protection Standard Report	as necessary

C. WATER QUALITY PROTECTION STANDARD AND COMPLIANCE PERIOD

1. Water Quality Protection Standard Report

For each waste management unit (Unit), the Water Quality Protection Standard shall consist of all constituents of concern, the concentration limit for each constituent of concern, the point of compliance, and all water quality monitoring points.

The Water Quality Protection Standard for naturally occurring waste constituents consists of the constituents of concern, the concentration limits, and the point of compliance and all monitoring points. The Executive Officer shall review and approve the Water Quality Protection Standard, or any modification thereto, for each monitored medium.

The report shall:

- a. Identify **all distinct bodies of surface and groundwater** that could be affected in the event of a release from a Unit or portion of a Unit. This list shall include at least the uppermost aquifer and any permanent or ephemeral zones of perched groundwater underlying the facility.
- b. Include a map showing the monitoring points and background monitoring points for the surface water monitoring program, groundwater monitoring program, and the unsaturated zone monitoring program. The map shall include the point of compliance in accordance with §20405 of Title 27.
- c. Evaluate the perennial direction(s) of groundwater movement within the uppermost groundwater zone(s).

If subsequent sampling of the background monitoring point(s) indicates significant water quality changes due to either seasonal fluctuations or other reasons unrelated to waste management activities at the site, the Discharger may request modification of the Water Quality Protection Standard.

2. Constituents of Concern

The constituents of concern include all the waste constituents, their reaction products, and hazardous constituents that are reasonably expected to be in or derived from waste contained in the Unit. The constituents of concern for all Units at the facility are those listed in Section D. III through IX for the specified monitored medium, excluding the monitoring parameters.

Monitoring Parameters

Monitoring parameters are constituents of concern that are the waste constituents, reaction products, hazardous constituents, and physical parameters that provide a reliable indication of a release from a Unit. The monitoring parameters for all Units are calcium, magnesium, sodium, sulfate, bicarbonate, carbonate and chloride.

3. Concentration Limits

For a naturally occurring constituent of concern, the concentration limit for each constituent of concern shall be determined as follows:

- a. By calculation in accordance with a statistical method pursuant to §20415 of Title 27; or
- b. By an alternate statistical method acceptable to the Executive Officer in accordance with §20415 of Title 27.

The established concentration limits for naturally occurring constituents of concern are listed in Table 2.

4. Point of Compliance

The point of compliance for the water standard at each Unit is a vertical surface located at the hydraulically downgradient limit of the Unit that extends through the uppermost aquifer underlying the Unit.

D. REQUIRED MONITORING PROGRAMS

The Discharger shall comply with the monitoring program provisions of Title 27 for groundwater, surface water, and the unsaturated zone, in accordance with Monitoring Specifications in Standard Provisions and Reporting Requirements (2003). All monitoring shall be conducted in accordance with a Sample Collection and Analysis Plan, which includes quality assurance/quality control standards, that is acceptable to the Executive Officer.

All point of compliance monitoring wells established for the detection, evaluation and corrective action monitoring program shall constitute the monitoring points for the groundwater Water Quality Protection Standard. All groundwater monitoring wells, unsaturated zone monitoring devices, leachate, and surface water monitoring points shall be sampled and analyzed for monitoring parameters and constituents of concern as indicated and listed in Section D. III through IX. .

Method detection limits and practical quantitation limits shall be reported. All peaks shall be reported, including those, which cannot be quantified and/or specifically identified. Metals shall be analyzed in accordance with the methods listed in Table 1.

The Discharger may, with the approval of the Executive Officer, use alternative analytical test methods, including new USEPA approved methods, provided the methods have method detection limits equal to or lower than the analytical methods specified in this Monitoring and Reporting Program.

I. GENERAL FACILITY MONITORING

General facility monitoring shall be reported on an annual basis with the annual monitoring report and shall include the continuous measurement of precipitation and reporting of monthly precipitation and 24-hour precipitation for the most significant storm events of the period.

II. STANDARD OBSERVATIONS

Each monitoring report shall include a summary and certification of completion of all applicable Standard Observations for receiving waters, and along the perimeter and for

the WMUs. The standard observations shall be performed on a quarterly basis and shall include the following.

1. Receiving Waters:
 - a. Discoloration and turbidity: description of color, source, and size of affected area.
 - b. Evidence of water uses: presence of water-associated wildlife (lakes, ponds, springs, streams).
 - c. Flow rate (springs and streams).
 - d. Weather conditions: wind direction and estimated velocity, total precipitation during recent days and on the day of the observation.

2. Along the Perimeter of Waste Management Unit
 - a. Evidence of liquid leaving or entering the Unit (i.e., runoff, run-on, seepage, transfers), estimated size of affected area, and flow rate (show affected area on map).
 - b. Evidence of erosion.

3. For the Waste Management Unit
 - a. Evidence of ponded water at any point on the waste management unit (show affected area on map).
 - b. Evidence of erosion.

III. FLOTATION TAILINGS RESERVOIR (FTR) WATER QUALITY MONITORING

Monitoring stations at FTR include the following.

<u>Station</u>	<u>Description</u>	<u>Location</u>
FTRSPINE1&2 ²	Groundwater Spine Drain #1	Outlet pipe into Spine Drain Sump, Spine Collector
FTRSPRING ²	Spring Drain #1	Outlet Pipe into Sump
FTRFOUND ²	Groundwater Extraction	Return Sump
FTRLCRS ²	Leachate	Leachate Outlet Pipe
GWM-01	Groundwater	Upgradient Monitoring Well
GWM-02 ¹	Groundwater	Downgradient Monitoring Well
FPZ1A/1B	Leachate	Tailings Impoundment
FPZ2	Leachate	Tailings Impoundment
FPZ3 – FPZ6	Groundwater	FTR Perimeter Wells

¹ Point of Compliance

² These monitoring stations are only sampled if the respective drains are open and flowing.

The following constituents and monitoring frequencies shall apply to the following FTR monitoring stations: LCRS Spring, Spine, and Foundation drains, FPZ-1A/1B, FPZ-2, FPZ3, FPZ4, FPZ5, FPZ6, GWM-01, and GWM-02. The Discharger shall monitor water flows monthly in the LCRS, Spring, Spine, and Foundation drains if the drains are open and flowing.

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
Pumping or flow rate	gpm	Measured	Monthly
Static Water Level	Feet MSL	Measured (Wells)	Quarterly
Temperature	°C	Measured	Quarterly
pH (field)	number	Measured	Quarterly
EC	µmhos	Grab	Quarterly
Lab pH	number	Grab	Quarterly
TDS	mg/l	Grab	Quarterly
Chloride	mg/l	Grab	Quarterly
Sulfate	mg/l	Grab	Quarterly
Calcium	mg/l	Grab	Quarterly
Sodium	mg/l	Grab	Quarterly
Magnesium	mg/l	Grab	Quarterly
Nitrate	mg/l	Grab	Quarterly
Ammonia ¹	mg/l	Grab	Quarterly
Antimony	mg/l	Grab	Quarterly
Arsenic ²	mg/l	Grab	Quarterly
Carbonate	mg/l	Grab	Quarterly
Bicarbonate	mg/l	Grab	Quarterly
Iron ¹	mg/l	Grab	Quarterly
Manganese ¹	mg/l	Grab	Quarterly
Selenium ²	mg/l	Grab	Quarterly
Nickel ²	mg/l	Grab	Quarterly

¹ Ammonia, iron, and manganese analyses are not required for GWM-02.

² An appropriate Atomic Absorption (AA) method shall be used for analysis of this constituent.

IV. LEACHED CONCENTRATES RESIDUE AREA (LCRF) AND PROCESS WATER RETENTION POND (PWP) WATER QUALITY MONITORING

Monitoring stations at the LCRF and the PWP include the following.

<u>Station</u>	<u>Description</u>	<u>Location</u>
LCRFLCRS	Leachate	Outlet Pipe to PWP
LCRFSPD ¹	Ground Water Spine Drain	Outlet Pipe to PWP
PWPLCRS	Leachate	PWP Return Sump
PWSPD ¹	Groundwater Spine Drain	PWP Return Sump
GWM-3	Groundwater	Upgradient Monitoring Well
GWM-4 ¹	Groundwater	Downgradient Monitoring Well
GWM-5 ¹	Groundwater	Downgradient Monitoring Well
GWM-6 ¹	Groundwater	Downgradient Monitoring Well
GWM-15 ¹	Groundwater	Downgradient Monitoring Well
GWM-24 ¹	Groundwater	Downgradient Monitoring Well
GWM-25 ¹	Groundwater	Downgradient Monitoring Well

¹ Points of Compliance

The following constituents shall apply to all the LCRF and PWP water quality monitoring stations listed above, except for GWM-3, which shall be monitored quarterly for static water level only and semi-annual monitoring for the parameters below. The semi-annual analysis shall be conducted in January and July.

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
Pumping or flow rate	gpm	Measured	Quarterly
Static Water Level	Feet MSL	Measured (Wells)	Quarterly
Temperature	°C	Measured	Quarterly
pH (field)	number	Measured	Quarterly
EC	µmhos	Grab	Quarterly
Lab pH	number	Grab	Quarterly
TDS	mg/l	Grab	Quarterly
Chloride	mg/l	Grab	Semi-annual
Sulfate	mg/l	Grab	Semi-annual
Sodium	mg/l	Grab	Semi-annual
Calcium	mg/l	Grab	Semi-annual
Magnesium	mg/l	Grab	Semi-annual
Nitrate	mg/l	Grab	Quarterly

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
Free (WAD) Cyanide ¹	mg/l	Grab	Semi-annual
Total Cyanide ²	mg/l	Grab	Semi-annual
Carbonate	mg/l	Grab	Semi-annual
Bicarbonate	mg/l	Grab	Semi-annual
Antimony	mg/l	Grab	Quarterly
Arsenic ³	mg/l	Grab	Quarterly
Chromium (Total) ²	mg/l	Grab	Quarterly
Copper ²	mg/l	Grab	Quarterly
Manganese	mg/l	Grab	Quarterly
Nickel ³	mg/l	Grab	Semi-annual
Selenium ³	mg/l	Grab	Quarterly
Zinc ²	mg/l	Grab	Semi-annual

¹ Monitoring wells GWM-4, -6, -15 shall not be monitored for WAD cyanide

² Monitoring wells GWM-4, -6, -15, and -25 shall not be monitored for chromium, copper, zinc, or total cyanide.

³ An appropriate Atomic Absorption (AA) method shall be used for analysis of this constituent.

V. GROUND WATER MONITORING FOR OVERBURDEN DISPOSAL SITES, LOW GRADE ORE STOCKPILES AND SKYROCKET PIT

Overburden and low-grade ore were placed in the Flotations Tailings Reservoir (FTR), Gold Knoll, and West overburden disposal sites (ODSs). Skyrocket Pit is receiving Group B liquid mine waste. Groundwater in these areas is currently monitored at the following locations.

<u>Station</u>	<u>Location</u>
GWM-30 ¹	FTR ODS
PZ-4	Skyrocket Pit
GWM-35A/B	East-southeast of Littlejohns Creek Diversion
GWM-36A/B	Northeast of Skyrocket Pit
GWM-37A	Southeast of Skyrocket Pit
GWM-11 ¹	Gold Knoll ODS
GWM-12 ¹	Southeast of Skyrocket Pit
GWM-21 ¹	Gold Knoll ODS
GWM-26 ¹	Gold Knoll ODS
GWM-31	Gold Knoll ODS
GWM-33	Gold Knoll ODS
GWM-34	Gold Knoll ODS
PZ-1	Gold Knoll ODS
GWM-09 ¹	West ODS/Base of Skyrocket Pit Dam
GWM-10 ¹	West ODS
GWM-16 ¹	West ODS
GWM-19 ¹	West ODS

<u>Station</u>	<u>Location</u>
GWM-20 ¹	West ODS
GWM-32	West ODS

¹ Points of Compliance

Sampling shall continue at all the above locations with the following constituents and frequency:

- Groundwater samples from GWM-10, -11, -12, -16, -21, -26, -30, -31, -32, -33, -34, and PZ-1 shall be analyzed for the constituents and at the frequency shown under Section IV above excluding for cyanide, chromium, copper, and zinc.
- Groundwater monitoring wells GWM-9, -19, and -20 shall be monitored quarterly for the constituents listed under Section IV above excluding for cyanide, chromium, and zinc.
- Groundwater samples from GWM-09, -10, -19, -20, and -31 shall also be analyzed quarterly for ammonia.
- Groundwater samples from GWM-31, -33, -34, and PZ-1 do not need to be analyzed for manganese.
- Monitoring well PZ-4, GWM-35A/B, GWM-36A/B, and GWM-37 were installed to monitor water levels immediately east, northeast, and southeast of Skyrocket Pit. Groundwater samples from these wells shall be analyzed quarterly for the constituents in Section IV above excluding cyanide, chromium, copper, and zinc.
- Monitoring wells GK-1, GK-2, and GK-3 were installed to monitor groundwater levels within the former Gold Knoll pit. These wells shall be monitored quarterly for groundwater levels and semi-annually for the COCs listed in Section IV above.

VI. SURFACE WATER MONITORING

Flow data from all surface water flow gauging stations within or adjacent to the facility site shall be reported to the Regional Water Board on a quarterly basis. Surface water monitoring shall be performed at the following stations:

<u>Station</u>	<u>Location</u>
FL-1	Downstream of SWM-10
SWM-1	Littlejohns Creek – upstream of FTR storm water runoff channel
SWM-2 ¹	Littlejohns Creek - downstream
SWM-3	Littlejohns Creek - downstream
SWM-6 ¹	Littlejohns Creek – upstream of diversion ditch
SWM-8 ¹	Unnamed drainage to Clover Creek
SWM-9 ¹	Gold Knoll Creek – downstream – Guage Station #1
SWM-10 ¹	Littlejohns Creek Diversion – Guage Station #5
SWM-12	Love Pond – downstream spot flow monitoring location
SWM-13	Littlejohns Creek Diversion – downstream of pond outflow
SWM-14	Unnamed creek above pond
SWM-15	Littlejohns Creek Diversion – Guage Station #3

<u>Station</u>	<u>Location</u>
SWM-16	Littlejohns Creek Diversion – Guage Station #6
SWM-17	Base of Skyrocket Lake Dam
TSWM-1	Littlejohns Creek downstream – Guage Station #2
TSWM-02	Edge of facility property, downstream of SWM-08
Stockpond	Stockwater Pond southeast of Gold Knoll ODS
Love Pond Spring	Base of FTR-ODS – upstream of Littlejohns Creek Diversion

¹ Points of Compliance

These surface water monitoring stations shall be analyzed quarterly for the constituents listed under Section IV above, excluding weak acid dissociable (WAD) cyanide, total cyanide, chromium, copper, and zinc. In addition, the following constituents shall be analyzed at the indicated frequencies for all surface water stations.

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
Pumping or flow rate	gpm	Field estimate	Monthly
Dissolved Oxygen	mg/l	Field Measured	Monthly
Temperature	°C	Measured	Monthly
pH (field)	number	Measured	Monthly
EC	µmhos	Grab	Monthly

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
TDS	mg/l	Grab	Monthly
Oil & Grease	mg/l	Grab	Monthly
Suspended Solids	mg/l	Grab	Monthly

VII. SKYROCKET PIT AND NORTH PIT WATER QUALITY MONITORING

Samples shall be collected from the pool surface of the Skyrocket and North pits at the following frequency:

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
Static Water Level	Feet MSL	Measured	Weekly
pH (field)	number	Measured	Quarterly
Temperature	°C	Grab	Quarterly
EC	µmhos	Grab	Quarterly
Lab pH	number	Grab	Quarterly
TDS	mg/l	Grab	Quarterly
Chloride	mg/l	Grab	Quarterly
Sulfate	mg/l	Grab	Quarterly
Sodium	mg/l	Grab	Quarterly

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
Magnesium	mg/l	Grab	Quarterly
Calcium	mg/l	Grab	Quarterly
Nitrate	mg/l	Grab	Quarterly
Carbonate	mg/l	Grab	Quarterly
Bicarbonate	mg/l	Grab	Quarterly
Arsenic ¹	mg/l	Grab	Quarterly
Iron	mg/l	Grab	Quarterly
Manganese	mg/l	Grab	Quarterly
Nickel ¹	mg/l	Grab	Quarterly
Selenium ¹	mg/l	Grab	Quarterly

¹ An appropriate Atomic Absorption (AA) method shall be used for analysis of this constituent.

VIII. ODS SEEPAGE

Seepage from the West and Gold Knoll ODSs at the locations listed below shall be monitored quarterly for the constituents listed above in Section IV excluding copper, chromium, and zinc.

<u>Station</u>	<u>Location</u>
GK Seep	Southwest side of Gold Knoll ODS
West ODS 1	Northwest of northern portion of West ODS
West ODS 2	West side of northern portion of West ODS
West ODS 3	Southwest side of northern portion of West ODS
West ODS 4	Northwest side of southern portion of West ODS
West ODS 5	Southeast of southern portion of West ODS

IX. FLOTATION TAILINGS RESERVOIR (FTR) TO SKYROCKET PIT WATER QUALITY TRANSFER MONITORING

In accordance with WDRs No. R5-2008-0021, leachate collected from the FTR LCRS shall be discharged to Skyrocket Pit Lake or handled in some other manner consistent with Title 27, Section 20340 (g). If the Discharger chooses to discharge leachate to Skyrocket Pit Lake then wastewater will be transferred directly from the FTR LCRS pump. The sampling station location will be the outlet pipe from the FTR to the Skyrocket Pit.

The following constituents shall apply to the Flotation Tailings Reservoir transfer water to Skyrocket Pit water quality monitoring station:

<u>Constituents</u>	<u>Units</u>	<u>Type of Sample</u>	<u>Frequency</u>
Pumping or flow rate	gpm	Measured	Daily
pH (field)	number	Measured	Monthly
Temperature	°C	Grab	Monthly
EC	µmhos	Grab	Monthly
TDS	mg/l	Grab	Monthly
WAD Cyanide (Including Free Cyanide)	mg/l	Grab	Monthly
Sulfate	mg/l	Grab	Monthly
Sodium	mg/l	Grab	Monthly
Calcium	mg/l	Grab	Monthly
Magnesium	mg/l	Grab	Monthly
Bicarbonate	mg/l	Grab	Monthly
Chloride	mg/l	Grab	Monthly
Arsenic ¹	mg/l	Grab	Monthly
Chromium (Total)	mg/l	Grab	Monthly
Copper ¹	mg/l	Grab	Monthly
Nickel ¹	mg/l	Grab	Monthly
Selenium ¹	mg/l	Grab	Monthly

¹ An appropriate Atomic Absorption (AA) method shall be used for analysis of this constituent.

X. Land Application of Captured ODS Seepage and Springs

1. During periods of discharge to the land application areas, the Discharger shall monitor the quantity and quality of the discharge. The Discharger shall establish one or more permanent monitoring stations within the wastewater conveyance system as needed to ensure that all samples are representative of the actual discharge to the fields. At a minimum, the Discharger shall monitor the effluent wastewater as follows:

Constituent/ Parameter	Units	Sample Type	Sampling Frequency	Reporting Frequency
Flow to each field	gallons	Measurement	Daily	Monthly
pH	pH units	Grab	Weekly	Monthly
Total dissolved solids	mg/L	Grab	Monthly	Quarterly

2. Daily Pre-Application Inspections

The Discharger shall inspect the land application areas at least **once daily** prior to and during irrigation events, and observations from those inspections shall be documented for inclusion in the quarterly monitoring reports. The following items shall be documented for each check or field to be irrigated on that day:

- a. Evidence of erosion;
- b. Containment system condition;
- c. Condition of each standpipe and flow control valve (if applicable);
- d. Proper use of valves;
- e. Soil saturation;
- f. Ponding;
- g. Tailwater collection system and potential runoff to off-site areas;
- h. Potential and actual discharge to surface water;
- i. Odors that have the potential to be objectionable at or beyond the property boundary; and
- j. Insects.

Temperature; wind direction and relative strength; and other relevant field conditions shall also be observed and recorded. The notations shall also document any corrective actions taken based on observations made. A copy of entries made in the log during each month shall be submitted as part of the Quarterly Monitoring Report. If no irrigation with wastewater takes place during a given month, then the monthly monitoring report shall so state.

3. Routine monitoring

The Discharger shall perform the following routine monitoring and loading calculations during all months when land application occurs, and shall present the data in the Monthly and Annual Monitoring Reports.

Constituent	Units	Type of Sample	Sampling Frequency	Reporting Frequency
Precipitation	0.1 in.	Rain Gauge ¹	Daily	Monthly, Annually
Irrigation fields and checks receiving wastewater	--	Observation	Daily	Monthly, Annually
Hydraulic loading rate				
ODS Seepage and Spring Water	in.	Calculated ²	Daily	Quarterly
Total dissolved solids loading rate	lb/ac/mo	Calculated ²	Monthly	Quarterly

¹ Data obtained from the nearest National Weather Service rain gauge is acceptable.

² Rate shall be calculated for each irrigation check.

XI. Facility Monitoring

a. Facility Inspection

Annually, prior to the anticipated rainy season, but no later than **30 September**, the Discharger shall conduct an inspection of the facility. The inspection shall assess damage to the drainage control system, groundwater monitoring equipment (including wells, etc.), and shall include the Standard Observations contained in section F.4.f. of Standard Provisions and Reporting Requirements and D.II. of this MRP. Any necessary construction, maintenance, or repairs shall be completed by **31 October**. By **15 November** of each year, the Discharger shall submit an annual report describing the results of the inspection and the repair measures implemented, including photographs of the problem and the repairs.

b. Storm Events

The Discharger shall inspect all precipitation, diversion, and drainage facilities for damage **within 7 days** following *major storm events*. Necessary repairs shall be completed **within 30 days** of the inspection. The Discharger shall report any damage and subsequent repairs within 45 days of completion of the repairs, including photographs of the problem and the repairs.

The Discharger shall implement the above monitoring program on the effective date of this Order. The transmittal letter accompanying monitoring reports submitted under this Order shall, as required under the Standard Provisions (*Provision 5, General Requirements, REPORTING REQUIREMENTS*), contain a statement by the discharger, or the discharger's authorized agent, under penalty of perjury, that to the best of the signer's knowledge the report is true, accurate and complete.

Ordered by: _____
PAMELA C. CREEDON, Executive Officer

25 January 2008

(Date)

Table 1 – Metals Analysis

<u>Inorganics (dissolved):</u>	<u>USEPA Method</u>
Chromium	7196A
Copper	6020
Vanadium	6020
Zinc	6020
Iron	6020
Manganese	6020
Arsenic	7062
Nickel	6020
Selenium	7742
Cyanide	9010B

Table 2 – Water Quality Protection Standards

Intrawell standards based on pre- and early mining concentrations.

Greenstone Wells			
Sample Point	Constituent	Upper Concentration Limit	Lower Concentration Limit
GWM-02	Arsenic	0.0179	
	Chloride	38	
	Nickel	0.056	
	Nitrate	4.9	
	pH (lab)	8.23	6.75
	Selenium	0.0107	
	Sulfate	31.7	
	TDS	495	
GWM-04	Arsenic	0.0179	
	Chloride	13.3	
	Nickel	0.056	
	Nitrate	3.64	
	pH (lab)	8.33	6.78
	Selenium	0.011	
	Sulfate	43.9	
	TDS	463	
GWM-11	Arsenic	0.0183	
	Chloride	10.1	
	Nitrate	5.32	
	pH (lab)	8.17	6.91
	Selenium	0.011	
	Sulfate	13.4	
	TDS	306	

Sample Point	Constituent	Upper Concentration Limit	Lower Concentration Limit
GWM-15	Arsenic	0.0186	
	Chloride	90.1	
	Nickel	0.0567	
	Nitrate	4.15	
	pH (lab)	9.66	4.62
	Selenium	0.0113	
	Sulfate	119	
	TDS	689	
GWM-26	Arsenic	0.0189	
	Chloride	11.4	
	Nickel	0.0572	
	Nitrate	2.43	
	pH (lab)	7.87	7.13
	Selenium	0.0115	
	Sulfate	15	
	TDS	396	
GWM-30	Arsenic	0.0182	
	Chloride	37.7	
	Nickel	0.056	
	Nitrate	5.54	
	pH (lab)	8.29	6.86
	Selenium	0.0109	
	Sulfate	30.4	
	TDS	514	

Phyllite Wells

Sample Point	Constituent	Upper Concentration Limit	Lower Concentration Limit
GWM-10	Ammonia	6.65	
	Arsenic	0.0182	
	Chloride	3859	
	Nickel	0.057	
	Nitrate	3.83	
	pH (lab)	7.96	7.07
	Selenium	0.0164	
	Sulfate	3734	
	TDS	11630	
GWM-19	Ammonia	0.556	
	Arsenic	0.0182	
	Chloride	418	
	Copper	0.0377	
	Nickel	0.056	

	Nitrate	3.83	
	pH (lab)	7.81	6.86
	Selenium	0.0109	
	Sulfate	427	
	TDS	2078	
GWM-20			
	Ammonia	12.7	
	Arsenic	0.0249	
	Chloride	6409	
	Copper	0.0377	
	Nickel	0.056	
	Nitrate	14.3	
	pH (lab)	7.94	6.61
	Selenium	0.0109	
	Sulfate	4916	
	TDS	17660	

Other Wells			
Sample Point	Constituent	Upper Concentration Limit	Lower Concentration Limit
GWM-06	Arsenic	0.018	
GWM-06	Chloride	34.1	
GWM-06	Nickel	0.056	
GWM-06	Nitrate	21.8	
GWM-06	pH (lab)	8.26	6.38
GWM-06	Selenium	0.011	
GWM-06	Sulfate	144	
GWM-06	TDS	898	
GWM-16			
GWM-16	Arsenic	0.052	
GWM-16	Chloride	20.9	
GWM-16	Nickel	0.0564	
GWM-16	Nitrate	4.01	
GWM-16	pH (lab)	8.47	5.96
GWM-16	Selenium	0.011	
GWM-16	Sulfate	82.6	
GWM-16	TDS	1106	
GWM-25			
GWM-25	Arsenic	0.0189	
GWM-25	Chloride	10.8	
GWM-25	Nickel	0.0572	
GWM-25	Nitrate	4.37	
GWM-25	pH (lab)	8.22	6.58
GWM-25	Selenium	0.0115	
GWM-25	Sulfate	165	
GWM-25	TDS	2368	

INFORMATION SHEET

ORDER NO. R5-2008-0021
ROYAL MOUNTAIN KING MINE
MERIDIAN BEARTRACK COMPANY
MERIDIAN GOLD COMPANY AND
FELIX MINING COMPANY
CALAVERAS COUNTY

Royal Mountain King Mine (RMKM) is west of Highway 4 and south of Rock Creek Road near the town of Copperopolis, Calaveras County. RMKM was a large open pit gold mining facility operated by Meridian Gold Company. Mining facilities consist of three open pits (Gold Knoll, Skyrocket Pit, and North Pit), a mill, a Process Water Retention Pond/Leached Concentrate Residues Facility (PWP/LCRF), a Flotation Tailings Reservoir (FTR), and three overburden disposal sites (ODSs). The mining and processing of the gold ore operations commenced in February 1989 and shutdown in July 1994.

General

Approximately 56 million tons of gold-bearing ore and 50 million tons of waste rock have been mined from the three pits. Mine waste at RMKM includes waste rock, flotation tailings, and leached concentrate tailings. This waste was disposed of in piles and mine waste management units (WMUs) situated on the property. The lined FTR contains approximately 6.5 million tons of flotation tailings and 750 acre-feet of associated water. The flotation tailings (solids) are classified as a Group C mining waste and the associated water (liquids) is classified as a Group B mining waste pursuant to Title 27, California Code of Regulations, Division 2, Subdivision 1 (Title 27). Approximately 186,400 tons of leached concentrate tailings produced from milling operations are stored in the Leached Concentrate Residue Facility (LCRF), a lined surface impoundment (Group B waste management unit). A 200,000-ton pile of ore that was heap leached is situated on top of the concentrate tailings in the northern portion of the impoundment.

Before mining began in 1989, groundwater and surface water quality varied widely across the site. The facility contains three distinct geology-related groundwater zones, each of which is separated by faults. East of the Littlejohns Fault, the groundwater is primarily in a greenstone formation and was of good quality (defined as "below all beneficial use criteria"). Between the Littlejohns Fault and the Hodson Fault to the west, groundwater is in a mixture of greenstone and phyllite and the mineralization that occurs in this area. In this area, groundwater quality varied from good to fair quality. West of the Hodson Fault, groundwater is primarily in a phyllite formation, and good to poor quality water was found in this area. The poor groundwater quality is associated with certain areas in the phyllites where these deep ocean deposits are releasing salts typical of oceanic water quality. Also, some elevated salts and metal concentrations in groundwater is the result of mineralization contained in the fault zone. Several springs that flowed mainly in the winter months also showed poor water quality and are associated with phyllite poor groundwater quality.

A review of historical water quality data indicates that mining activities have impacted surface water and groundwater, specifically from permitted disposal of overburden rock stockpiled on native ground and leakage through the liner at the FTR. Statistically significant concentration increases have been detected for several constituents of concern in surface water and groundwater downgradient of each of the three ODSs. Statistically significant impacts were also

detected in both groundwater and surface water at the FTR and in the former process area near the PWP and LCRF. Downgradient monitoring wells have had increases in several constituents above background concentrations and beneficial use criteria. In addition, Water with elevated TDS is discharging from the base of the FTR-ODS in an area known as Love Pond Spring. The spring discharges into Littlejohns Creek Diversion. The spring began flowing several years after closure of the FTR's spring, spine and LCRS drains.

The water level in Skyrocket Pit has risen to form a groundwater mound. The rising water level in the pit resulted in a reversal of groundwater flow direction from in toward the pit to outward from the pit; this reversal occurs to the southeast of the pit and was first manifested as increases in surface flow during the second quarter of 1999. This reversal of groundwater flow direction has caused increased flows and concentrations of sulfate and TDS in the Littlejohns Creek Diversion.

Surface drainage is to Littlejohns Creek, Underwood Creek, and the most northeasterly tributary of Clover Creek. Littlejohns Creek then drained to Flowers Reservoir, downstream of the RMKM site and Flowers drains to Littlejohns Creek then discharges to French Camp Slough, which is tributary to the San Joaquin River within the Sacramento-San Joaquin River Delta.

State Water Board Order

On 25 April 2003, the Regional Water Board adopted Revised Cease and Desist Order (CDO) No. 5-2003-0055 to regulate the closure of the RMKM site. The three dischargers (Meridian Beartrack Company, Meridian Gold Company, and Felix Mining Company; also known as "Petitioner") subsequently petitioned the Order to the State Water Resources Control Board. On 20 May 2004, the State Water Board adopted Water Quality Order (WQO) No. 2004-0007, which vacated the Revised CDO and required the Regional Water Board and the Petitioner to consider a number of actions. These WDRs implement the findings and conclusions from this Order as follows:

1. The State Water Board concluded that "prior to the Petitioners' activities, background water quality in the area of RMKM was variable but generally poor. The record establishes that mining and related activities of Petitioners have had adverse effects on water quality at some locations," specifically in the areas downgradient of the three overburden disposal sites, Skyrocket Pit, and the Flotation Tailings Reservoir.

Finding III.A: "...although background water quality conditions are a very significant factor affecting downgradient water quality, it would not be accurate to attribute water quality conditions downgradient of the overburden disposal sites solely to background conditions or changes in rainfall patterns as proposed by Petitioners. Changes due to RMKM activities have affected the location of discharges, the timing and rate of discharges, and, in some instances, the concentration of TDS and other constituents of concern addressed in the WDRs adopted by the Regional Board. Prior to the dispute over the Revised CDO, Petitioners submitted documents to the Regional Board that recognized that RMKM operations have affected groundwater quality in the area..."

Finding III.B: "...The record establishes there are discharges of poor quality water to downgradient areas from the overburden disposal sites, the Skyrocket Pit, and the Flotation Tailings Reservoir....In addition to the natural sources of salinity and various metallic minerals, water quality has been adversely affected by large-scale mining activities....the record establishes that large-scale changes to the geology of the RMKM area due to mining operations have resulted in increased discharges of water during the dry season and increased concentrations of inorganic compounds in surface and groundwater, particularly downgradient of the overburden disposal sites at which leachate is circulated.

2. The State Water Board found that although the three overburden disposal sites are impacting water quality, it is not proper for the Regional Board to require a prescriptive Title 27 cap on these units. The units were constructed without a liner, and therefore " a cap without the underlying liner would not isolate the mining wastes." The State Board found that it is appropriate to consider alternative closure methods, and once they are implemented, the overburden disposal sites could be reclassified from Group B mine waste units to Group C mine waste units. Although the State Board Order highlights wetlands as an alternative closure method, the Dischargers have since determined that wetlands are not a viable method and therefore these WDRs do not address wetlands.

Finding III.C: "...The record does not support Petitioners' contention that the groundwater surfacing at downgradient locations is unchanged by passing through the mining waste in the overburden disposal sites....Similarly, Petitioners' contention that the overburden disposal sites do not release waste into receiving waters is not supported by the record...

Finding III.C: "...the State Board concludes that it would be appropriate for Petitioners and the Regional Board to pursue an alternative approach" [other than capping the overburden disposal sites]..."Successful design and implementation of an alternative approach to mine closure as addressed in Section III.E. would allow for reclassification of the overburden disposal sites as Group C wastes and more effective protection of water quality."

Finding III.E: "...In view of the high cost and limited effectiveness of installing a clay cover as a partial containment structure at the overburden disposal sites, development of a plan to improve water quality through use of enhanced and expanded wetland and riparian areas downgradient from the RMKM discharges should be given a high priority..."

Finding III.E: "...the provisions of the Title 27 regulations governing water quality and mining operations may provide sufficient flexibility for development of less costly and more effective mine closure alternatives that do not require installation of further clay covers over large areas at the RMKM site."

Conclusion: "...California Code of Regulations title 27, section 20080(b) authorizes approval of engineered alternatives to the normally applicable prescriptive standards in instances where certain requirements are met. Thus, even if wastes at particular sites remain classified as Group B waste, the regulations may allow for alternative approaches to control of those wastes."

3. In regard to Skyrocket Pit, the Order states that the long-term water quality threat is due to evapoconcentration of salts and other pollutants contained within the impounded water, and that potential water quality effects could be reduced by developing a drainage system that does not impound water at Skyrocket Pit. The Regional Water Board has implemented this conclusion by adopting an NPDES permit (No. R5-2007-0162) at its 6 December 2007 meeting that authorizes intermittent discharges to Littlejohns Creek from Skyrocket Pit Lake under certain conditions.

4. The State Water Board found that it may be appropriate to consider regulatory approaches outside of Title 27 to address the impacted groundwater and surface water, including de-designation of beneficial uses and/or adoption of a groundwater containment zone (subject to the provisions of State Water Board Resolution No. 92-49). The Order also states that a groundwater cleanup program would be very expensive and could have limited success.

Finding III.E: "...Another approach that the Petitioners previously raised...would be to amend the Basin Plan to de-designate beneficial uses of surface water and groundwater in the immediate vicinity of RMKM...if the Basin Plan were amended to de-designate beneficial uses of water...that would provide a basis for amendment of the WDRs and reclassification of the overburden disposal sites as Group C mining wastes subject to less stringent regulation..."

Finding III.E: "...Establishment of a groundwater containment zone may also be appropriate for this facility due to the high level of naturally occurring salts....In summary, a groundwater cleanup program would be extremely expensive, provide limited benefits, and could potentially aggravate groundwater conditions at some locations. For these reasons, Petitioners' proposal to establish a groundwater containment zone should be given more consideration as a partial regulatory solution for this extremely complex facility."

5. The Petitioners were ordered to prepare a plan for the development of expanded and enhanced wetland and riparian areas downgradient of the RMKM site. As stated above, the Dischargers prepared such a plan, but after consultation with Regional Water Board staff, determined that it was infeasible to implement. The Dischargers submitted a NPDES permit application, which contemplated that groundwater collected from the spring seepage areas at the bases of the overburden disposal sites would be transferred to Skyrocket Pit. Water would be discharged from Skyrocket Pit into Littlejohn's Creek under dilution conditions prescribed by the NPDES Permit. These WDRs substantially implement the State Water Board Order and therefore wetlands are not longer part of the overall remedial action.

6. WDRs Order No. 5-01-040 requires that wastewater collected from the Flotation Tailings Reservoir's leachate collection and recovery system (LCRS) be collected and discharged to Skyrocket Pit Lake. However, after informing the Regional Water Board that an alternative action was necessary to control the water balance in the lake, the Discharger closed the LCRS drain plug, allowing water to back up on top of the liner. The Conclusions section of the State Water Board Order allows the Petitioner to discharge wastewater to Skyrocket Pit, but states that the "Regional Board shall not institute enforcement action to require transfer of water from the FTR/LCRS to Skyrocket Pit prior to revision of the closure WDRs...". The Discharger did not resume discharge to Skyrocket Pit. The issue has been addressed in these WDRs as the

spine, spring, and LCRS drains may remain closed while the Discharger conducts studies and submits an amendment to the FTR closure plan showing that the final closure is protective of water quality.

7. The Regional Water Board was ordered to revise the mine closure WDRs upon receipt of the Petitioners' plan for addressing the various outstanding issues. These WDRs implement the State Water Board Order by rescinding and replacing Closure WDRs Order No. 5-01-040.

Closure

These closure WDRs implement the State Water Board Order but do not address final closure of the entire RMKM site. Several of the units have been closed per WDRs or have closure plans in place, as described below. Other units either have proposed studies to verify their models are accurate, or the WDRs request plans for final closure. In addition, the WDRs require plans and a timeline for addressing groundwater impacts. The overall site closure will be the combination of the closures of the individual units, and the site-wide corrective actions for surface water and groundwater impacts. The paragraphs below discuss each individual waste management unit and the closure status.

Flotation Tailings Reservoir (FTR): The FTR was previously closed as a Group C WMU because of the classification of the solids. During closure, the WMU was regraded to divert stormwater runoff, and then covered with a 6-inch thick layer of topsoil and vegetated. The approved closure plan stated that the unit's Leachate Collection and Recovery System (LCRS) was to remain open to drain any water that ponded upon the FTR's liner. This would prevent the hydraulic head from increasing over the liner, keeping the discharge of Group B mining wastewater through the liner system at a minimum. However, the Discharger closed the LCRS in 2003 to control the water balance in Skyrocket Pit Lake, in violation of their WDRs and inconsistent with the closure plan. In addition, the Discharger plugged the spine drains, which were installed to remove clean groundwater below the FTR liner. The FTR currently contains 750 acre-feet of Group B mining wastewater. These WDRs require the Discharger to conduct studies and submit an amendment to the FTR closure plan showing that the final closure is protective of water quality.

Leached Concentrate Residue Facility (LCRF): The Discharger has closed the LCRF in accordance with the previous WDRs and Title 27. Staff verified that the final closure was acceptable in a letter dated 28 July 2005. The closure cover consisted of (from top to bottom) a 6-inch thick vegetative soil cover, a one-foot thick FTR tailings layer, a geocomposite drainage layer and a foundation layer. The LCRF was graded to drain storm water from the unit.

Process Wastewater Pond (PWP): WDRs Order No. 5-2001-0040 implemented the Discharger's previous proposal to clean close this unit; however, the work had not yet taken place at the time these WDRs were being updated. As part of its RWD, the Discharger requested that the PWP be closed in-place instead. The Discharger has recently submitted several documents, which include the closure plan and a study showing that clean closure is infeasible per Title 27. These WDRs require the Discharger to close the unit in place, and allow the process to take place under the Discharger's proposed ten year timeframe. Closure will consist of a cover that consists of (from top to bottom) a vegetative layer, geocomposite


drainage layer, a 60-mil high-density polyethylene (HDPE) as the low-hydraulic-conductivity layer and a foundation layer.

Skyrocket Pit: The excavated Skyrocket Pit has filled with a combination of naturally occurring groundwater, wastewater transferred from the FTR and FTR LCRS, and wastewater from the ODSs. As the Skyrocket Pit water level rose above the elevation of the former creek bed, a dam was constructed on Littlejohns Creek to contain the Pit Lake wastewater. The dam was raised a second time as the Pit Lake water level continued to rise. Because the water levels rose above the Littlejohns Diversion creek bed bottom elevation, groundwater that formerly reported to the pit lake is now flowing into the creek diversion. In order to mitigate this on-going discharge, the Discharger proposes to lower the water level in Skyrocket Pit to an elevation below 955 feet amsl or that value which prevents Skyrocket Pit Lake water from flowing into the Littlejohns Creek Diversion. This lowering of Skyrocket Pit is required in these WDRs, and will be accomplished through discharges permitted in the companion NPDES Order No. R5-2007-0162. Final closure of Skyrocket Pit is not required in these WDRs; however, the Discharger is required to complete further studies and submit a groundwater capture analysis for the Pit Lake.

Overburden Disposal Sites (ODS): The three ODSs are classified as Group B mining waste based on high levels of dissolved solids in wastewater. Final closures of these units are not included in these WDRs. As discussed above, the State Water Board Order found that the Title 27 prescriptive standard for closure was infeasible. However, the Order found that an engineered alternatives to the prescriptive standard could be proposed, if the discharger demonstrates that the alternatives meets the performance standards of Title 27. These WDRs do not require that the ODSs be capped (i.e., the prescriptive standard), but instead require an engineered alternative for closure. It is anticipated that the engineered alternative will incorporate the transfer of wastewater to Skyrocket Pit to mitigate surface water impacts, and may include, either a containment zone or a de-designation of beneficial uses to mitigate groundwater impacts. In the interim, the procedure of land applying the collected groundwater and seepage flow from the ODSs on the surfaces of the ODSs or walls of Skyrocket Pit Lake is permitted in certain emergency situations.


Final Site-Wide Closure: Final site-wide closure will include the individual unit closures plus corrective action of any groundwater and surface water quality degradation from those units. As required in these WDRs, studies will be submitted that will bring together the already-approved closures with the final closure plans of the other units into a comprehensive management plan for the entire mine site. Engineered alternatives shall include justification why the prescriptive standard is infeasible and how the alternative meets the performance standards of Title 27. Other regulatory measures can and probably will be used to meet the performance standards of Title 27, including but not limited to State Water Board Resolution No. 92-49 (Containment Zone) or a Basin Plan Amendment to de-designate groundwater beneficial uses.

Attachment A

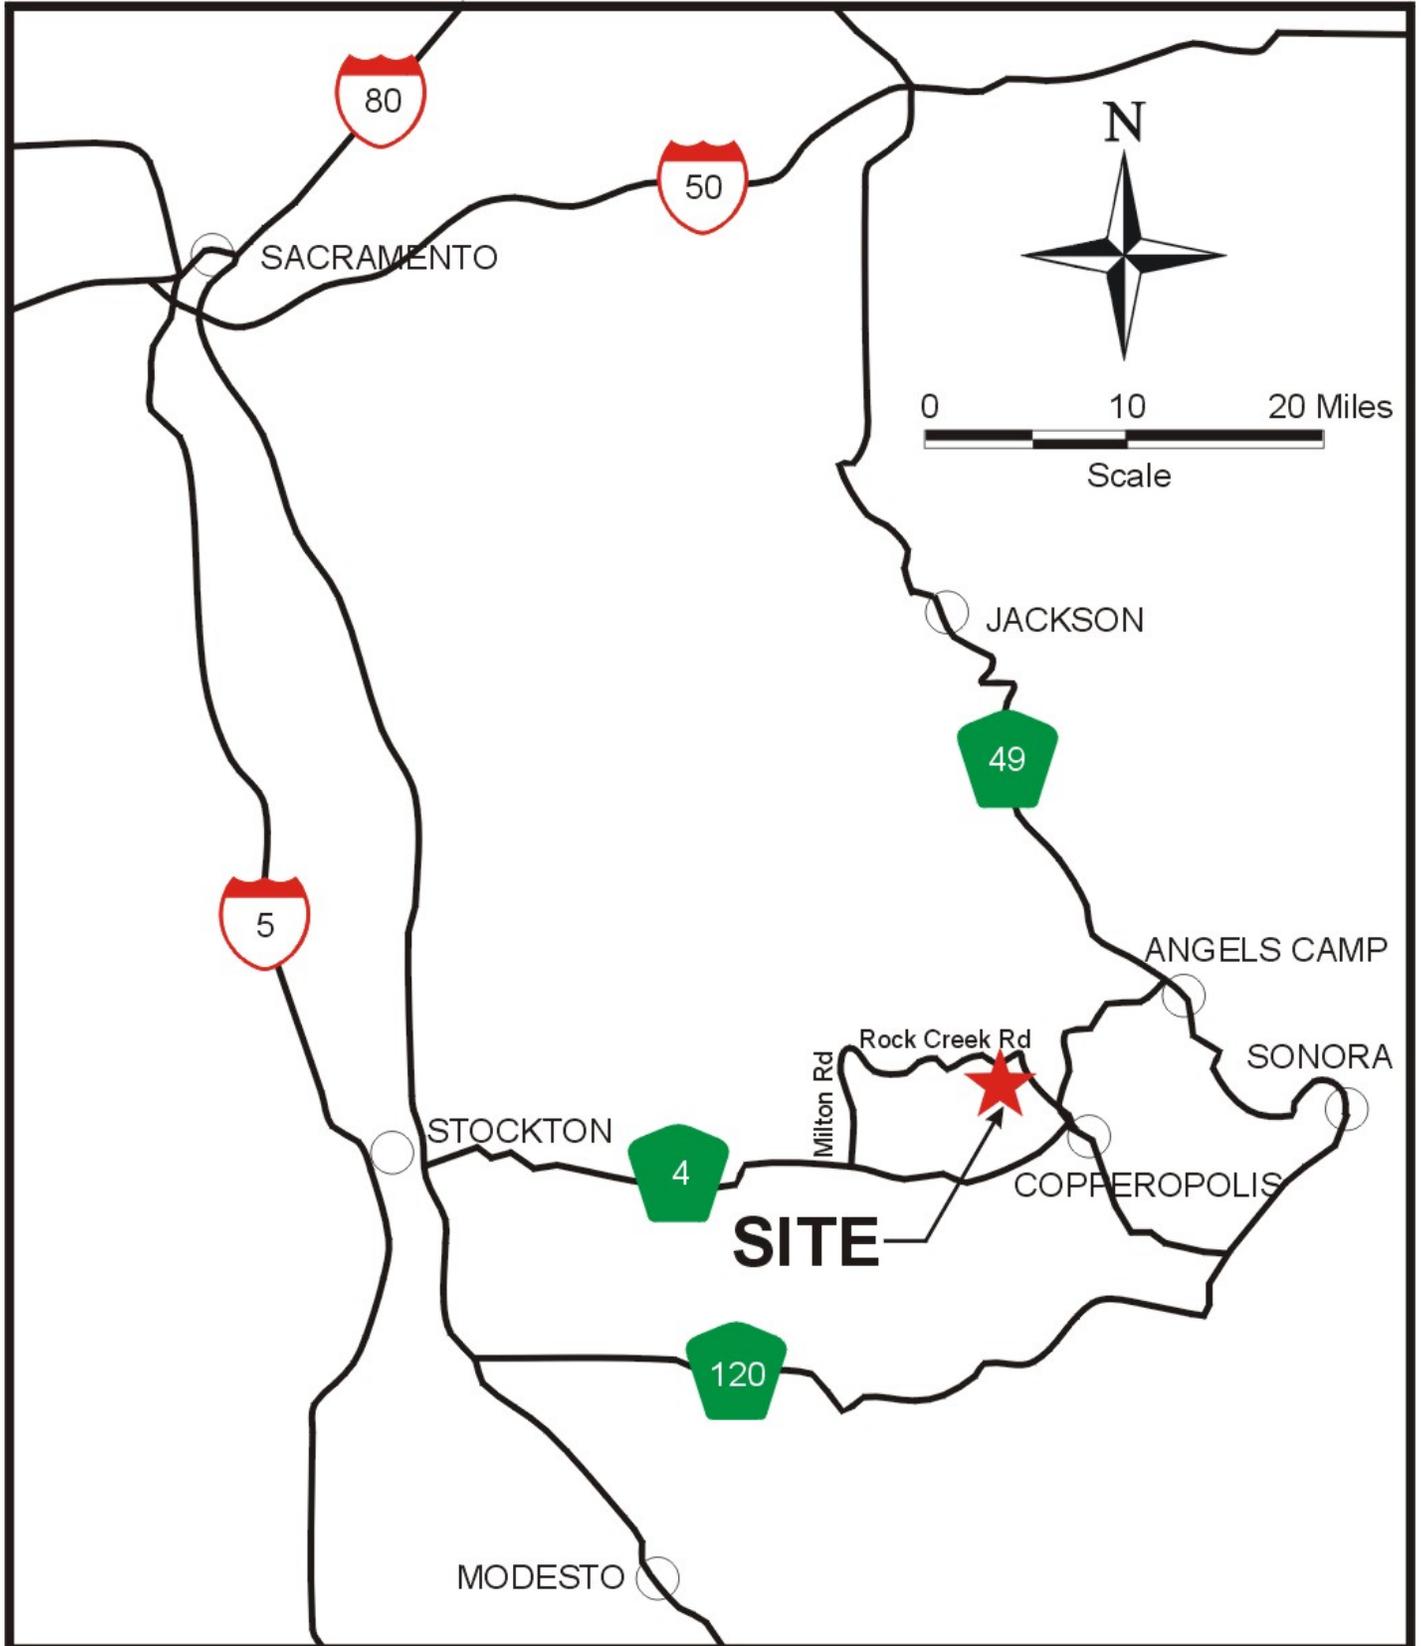



ROYAL MOUNTAIN KING MINE, CALAVERAS COUNTY

4-1033902GWR1004-04 REV. 10/18/05

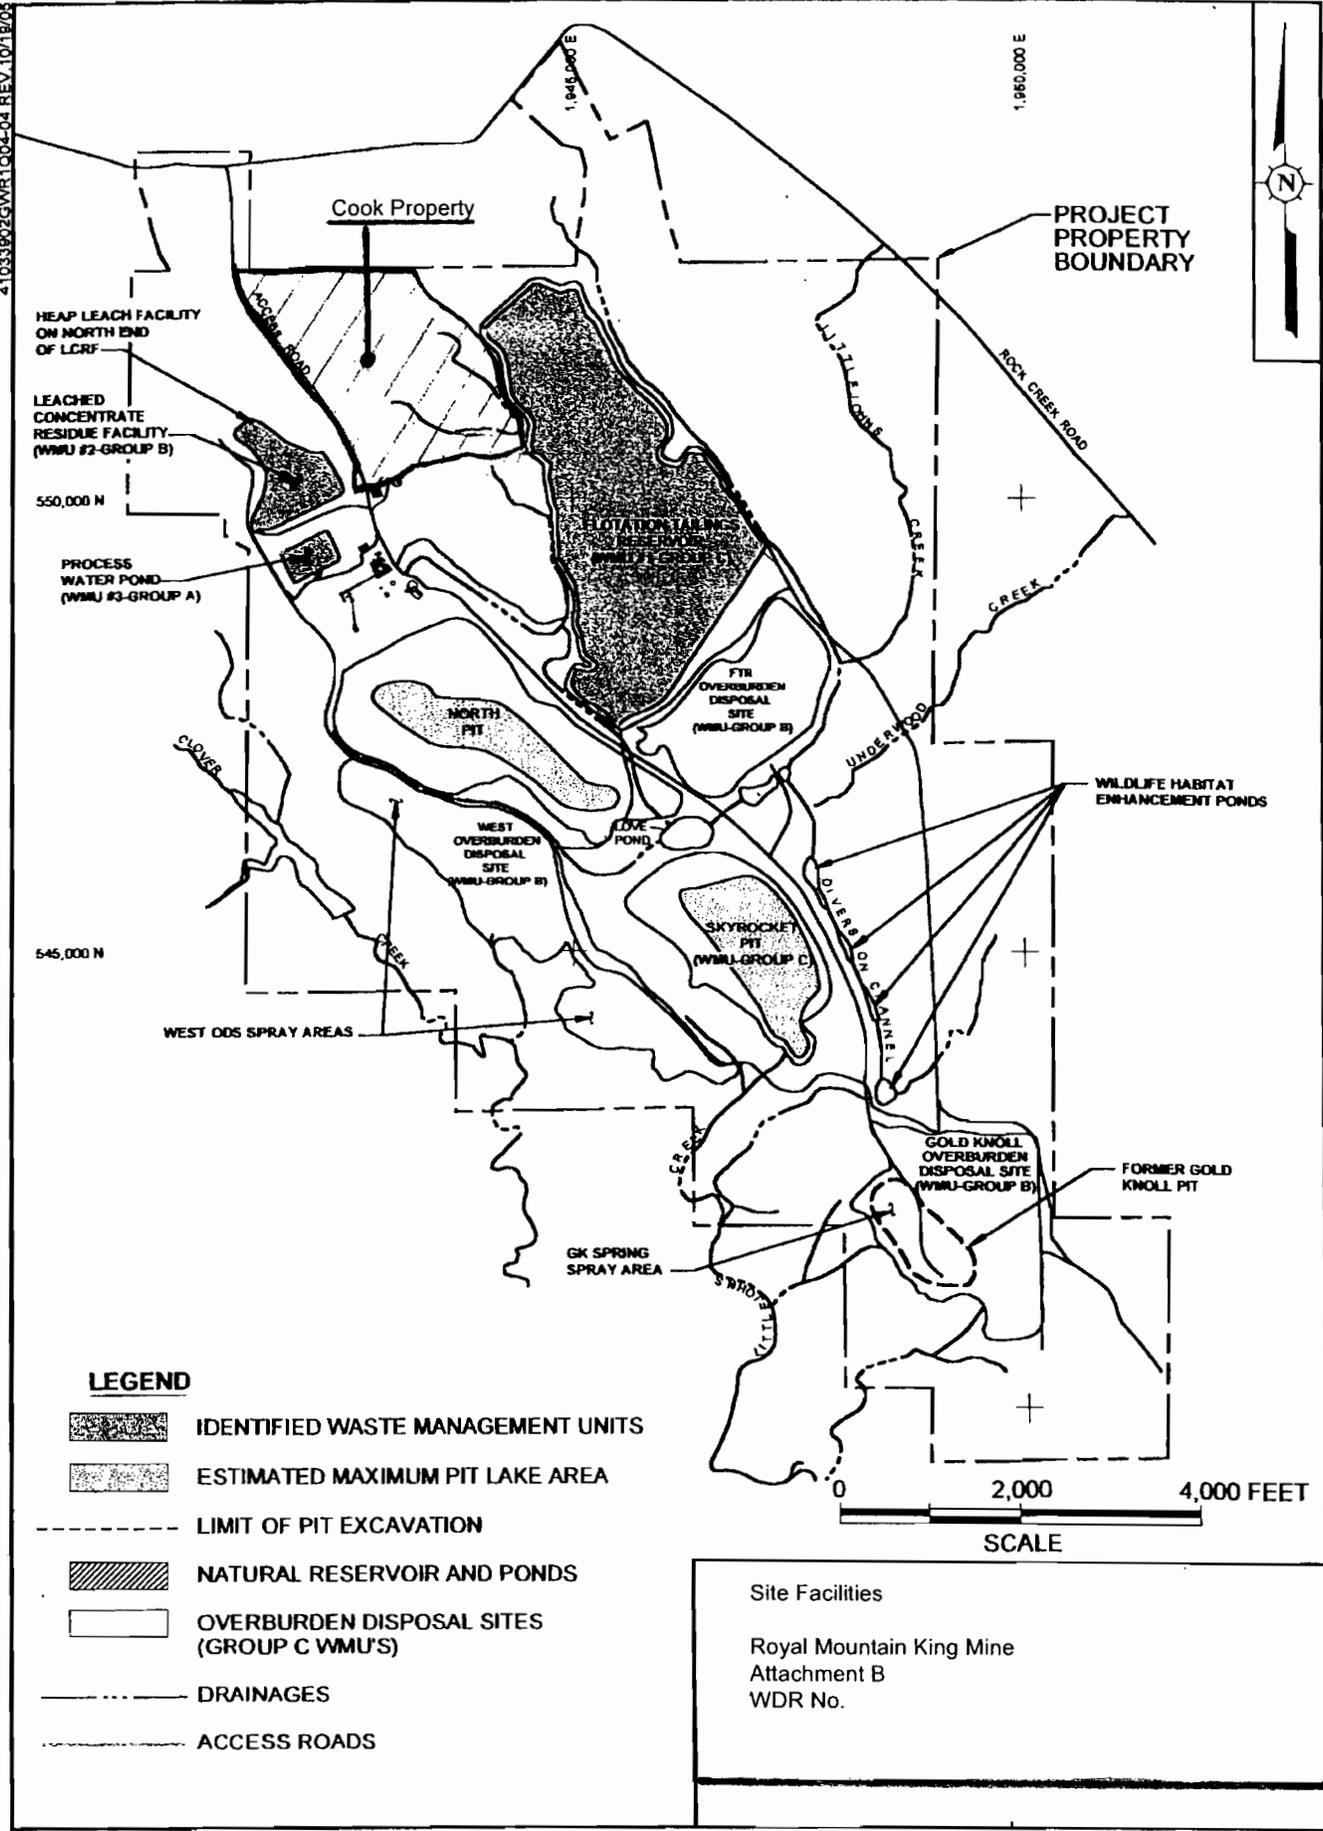



LEGEND

-  IDENTIFIED WASTE MANAGEMENT UNITS
-  ESTIMATED MAXIMUM PIT LAKE AREA
-  LIMIT OF PIT EXCAVATION
-  NATURAL RESERVOIR AND PONDS
-  OVERBURDEN DISPOSAL SITES (GROUP C WMU'S)
-  DRAINAGES
-  ACCESS ROADS



Site Facilities
 Royal Mountain King Mine
 Attachment B
 WDR No.

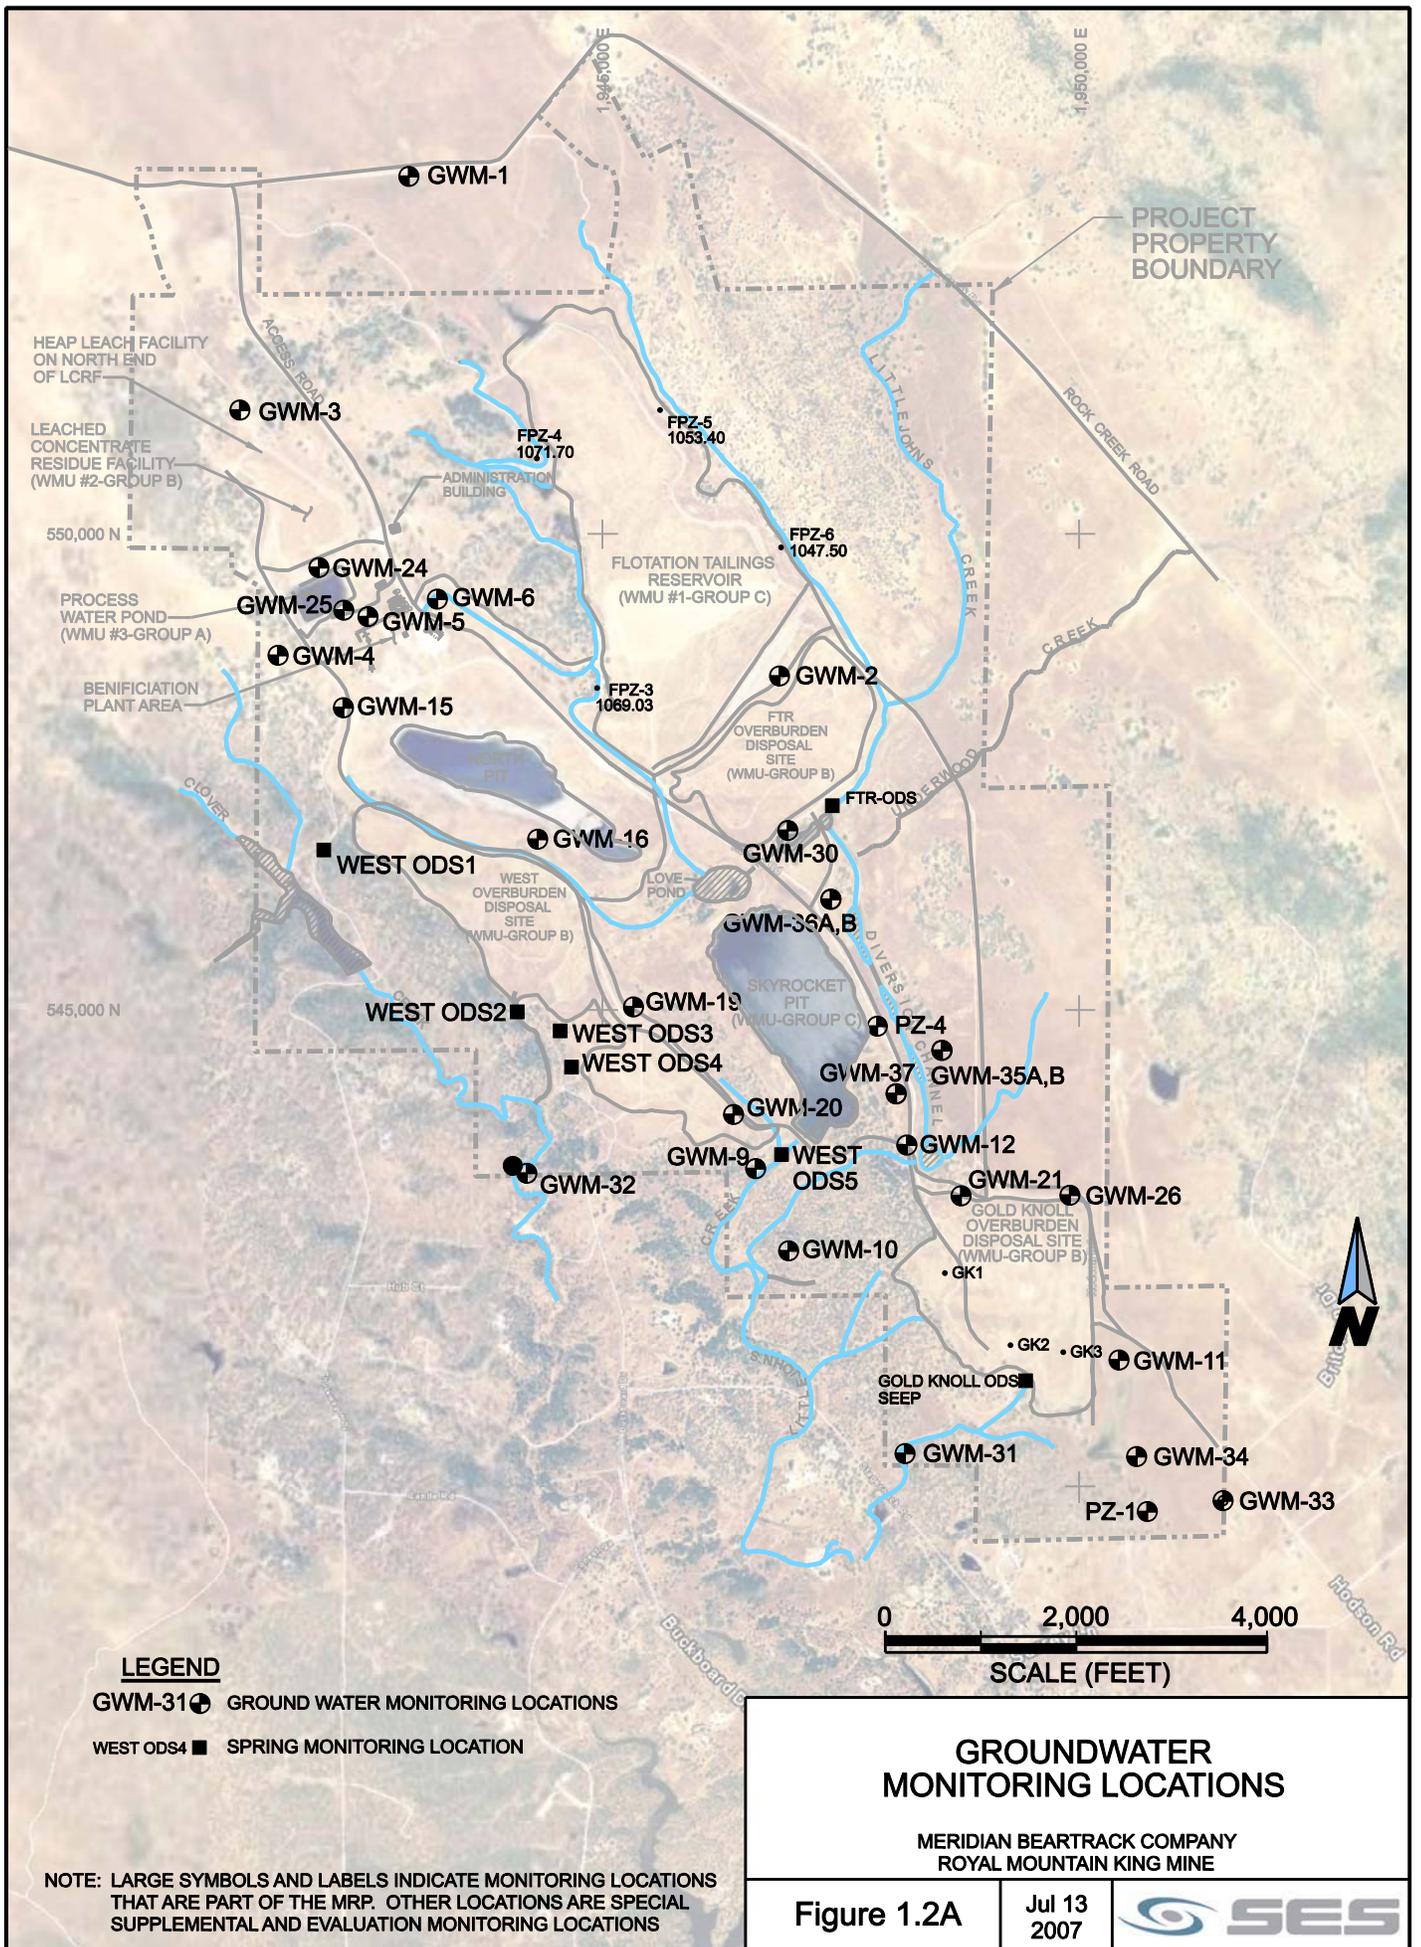

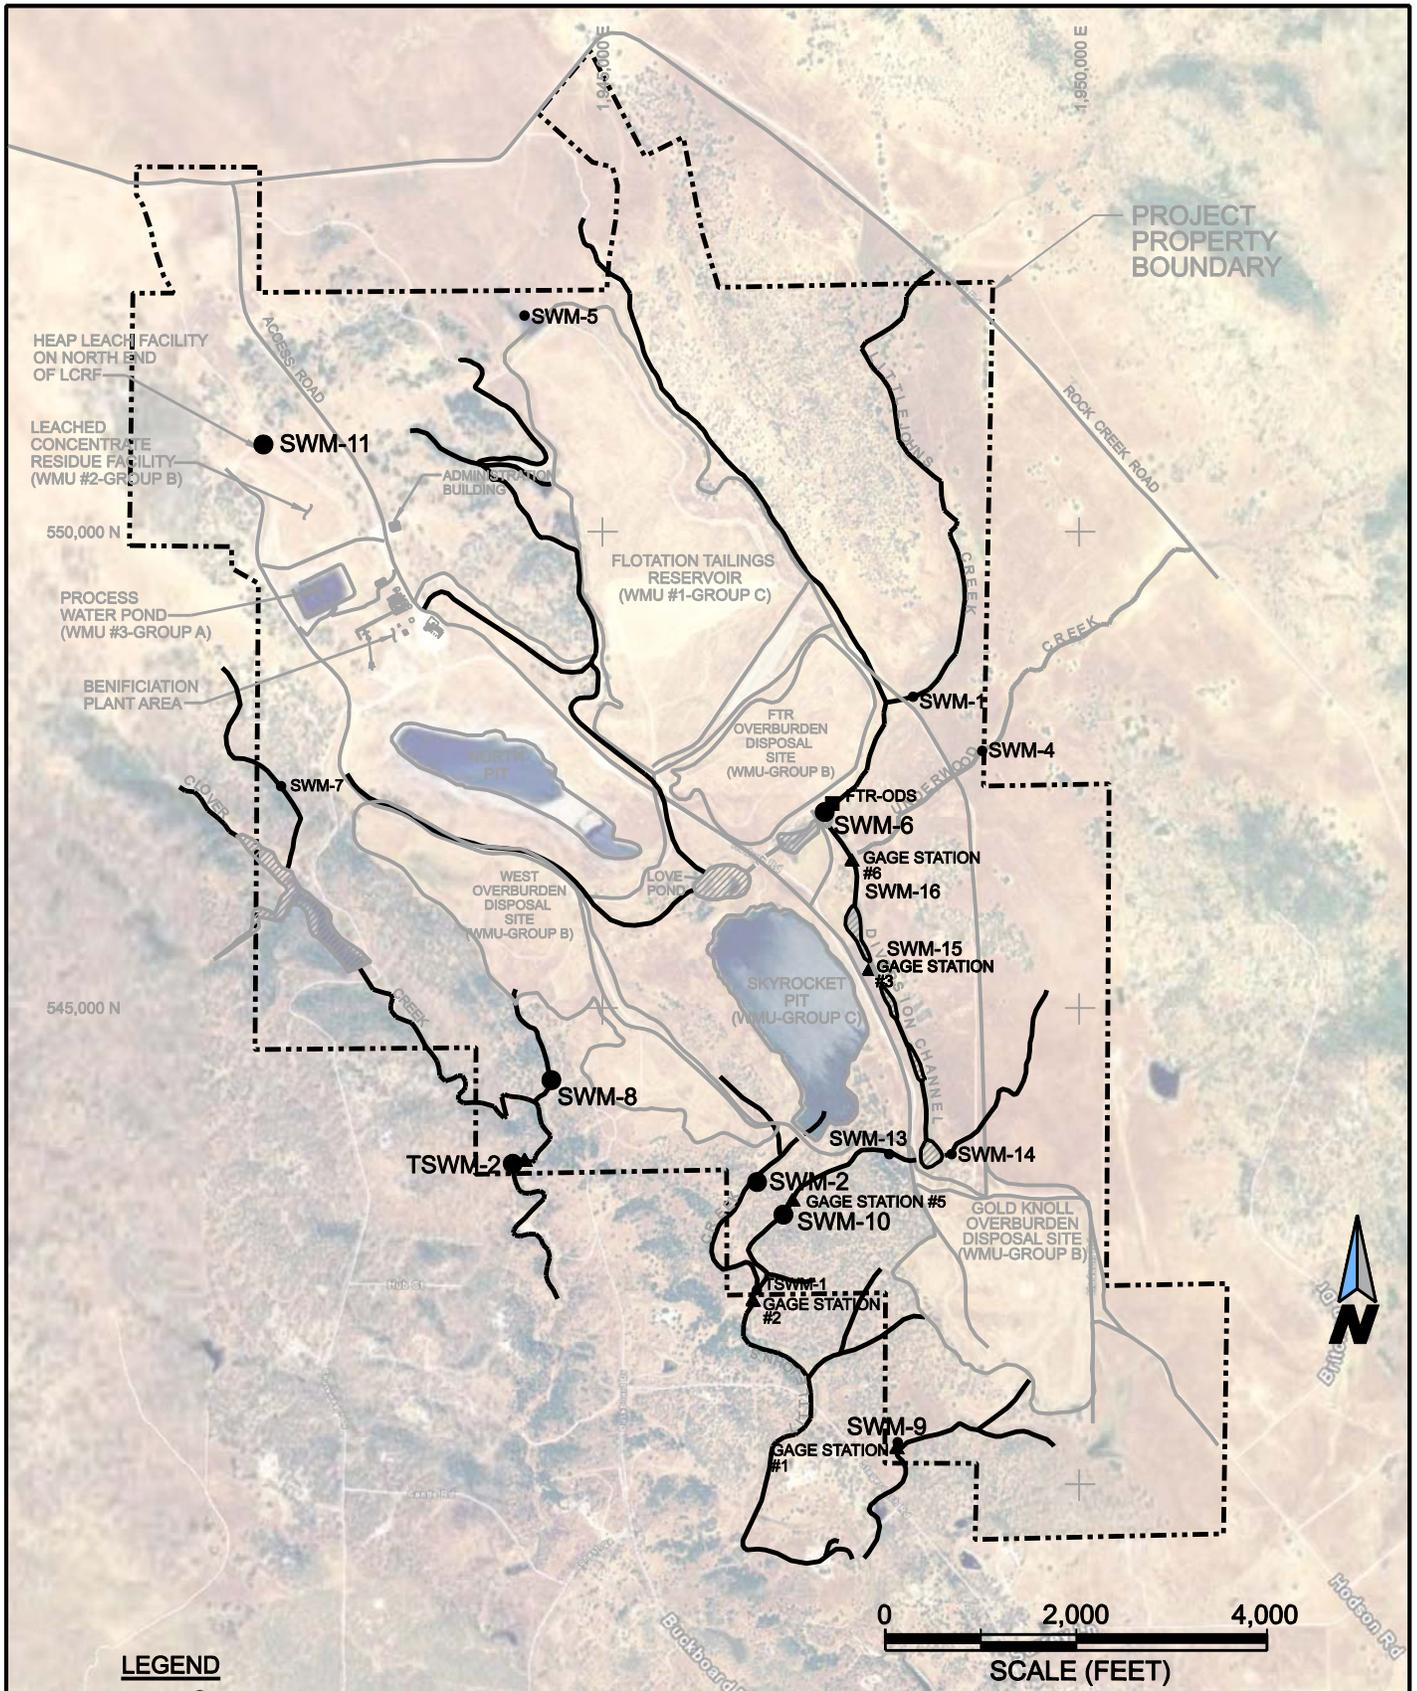

LEGEND

SWM-8 ● SURFACE WATER MONITORING LOCATIONS

GAGE STATION #4 ▲ HYDROLOGIC STATION

NOTE: LARGE SYMBOLS AND LABELS INDICATE MONITORING LOCATIONS THAT ARE PART OF THE MRP. OTHER LOCATIONS ARE SPECIAL SUPPLEMENTAL AND EVALUATION MONITORING LOCATIONS


SURFACE WATER MONITORING LOCATIONS

MERIDIAN BEARTRACK COMPANY
ROYAL MOUNTAIN KING MINE

Figure 1.2B


Sept 27
2007



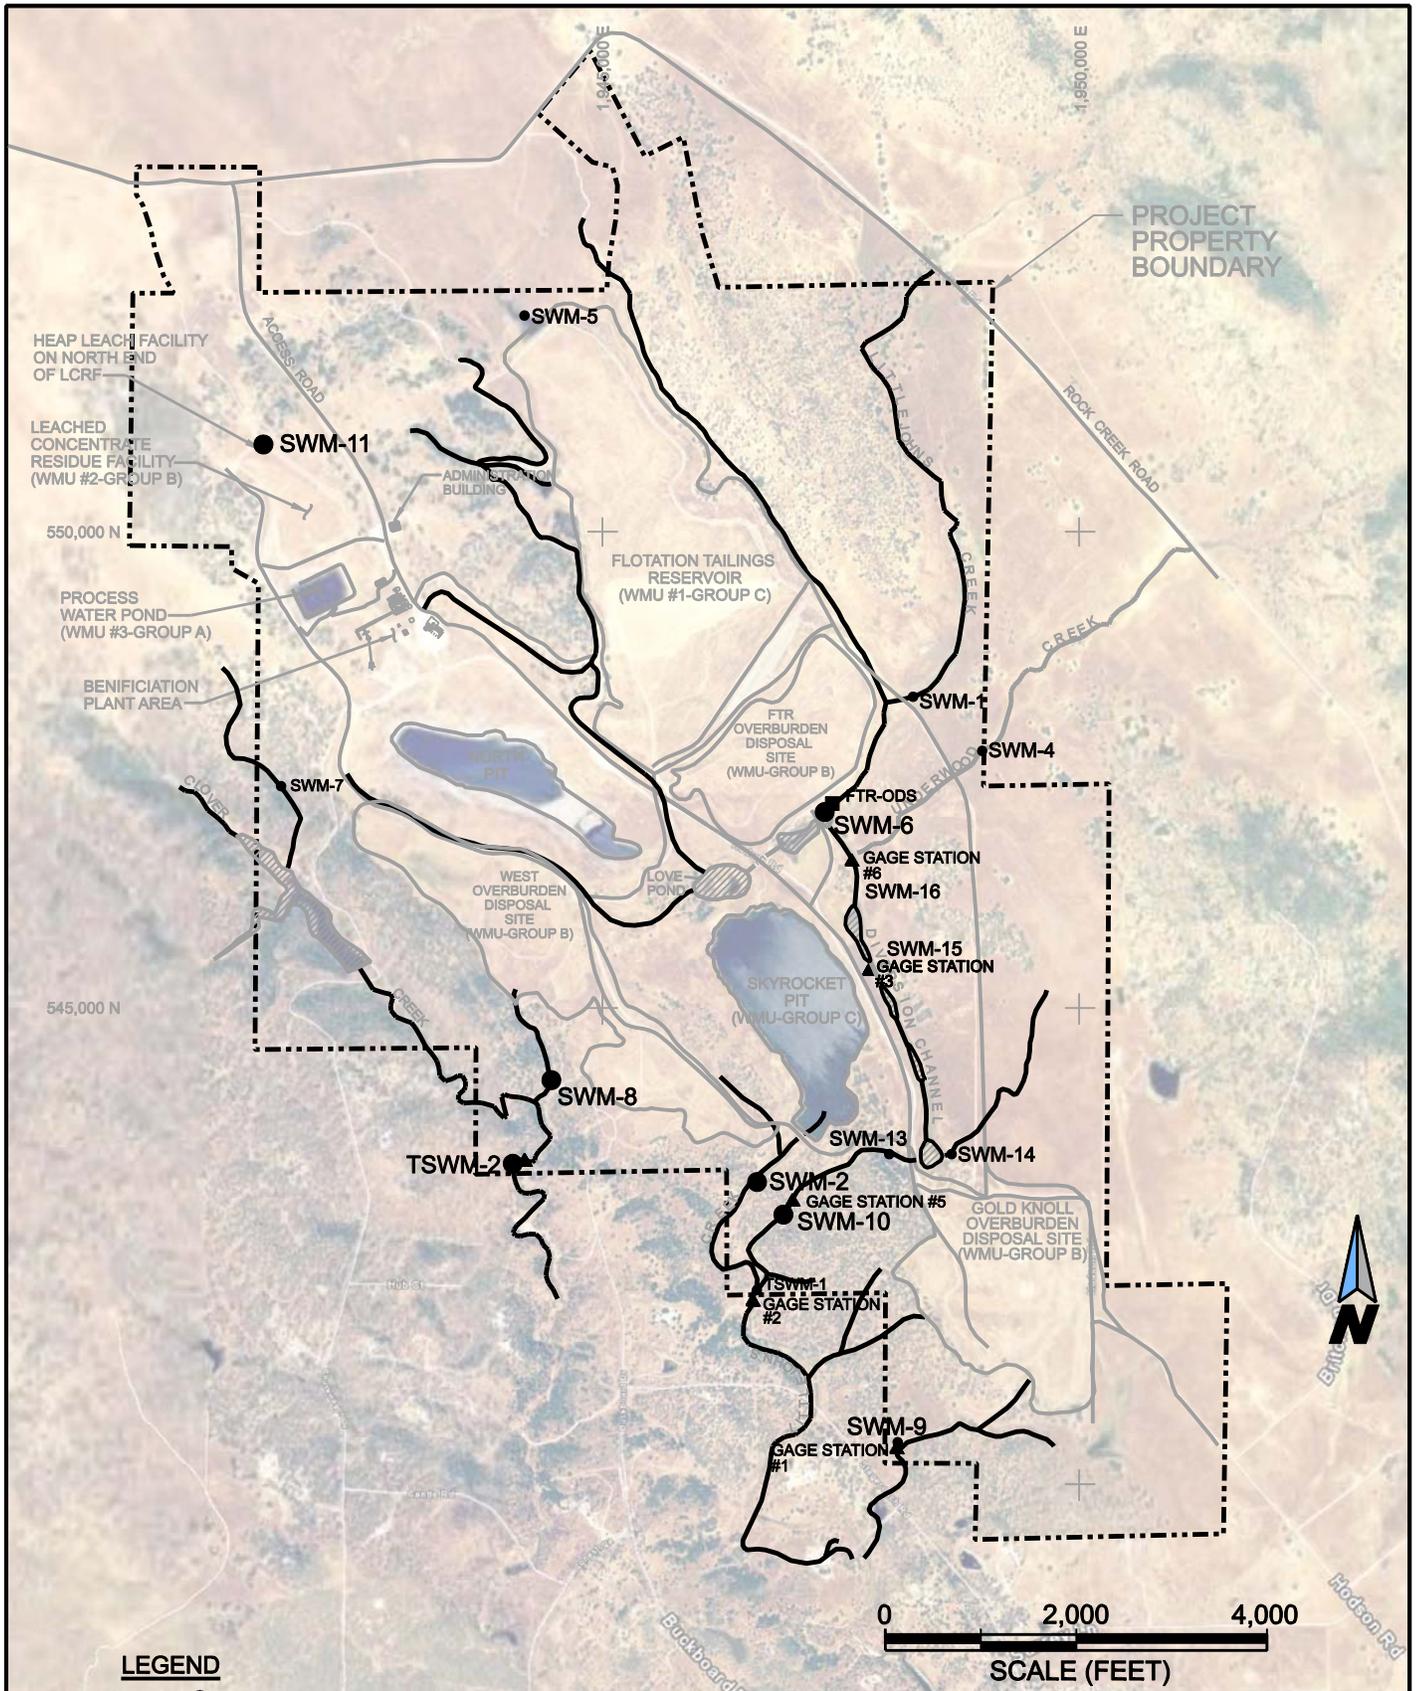

NOTE: LARGE SYMBOLS AND LABELS INDICATE MONITORING LOCATIONS THAT ARE PART OF THE MRP. OTHER LOCATIONS ARE SPECIAL SUPPLEMENTAL AND EVALUATION MONITORING LOCATIONS

SURFACE WATER MONITORING LOCATIONS		
MERIDIAN BEARTRACK COMPANY ROYAL MOUNTAIN KING MINE		
Figure 1.2B	Sept 27 2007	

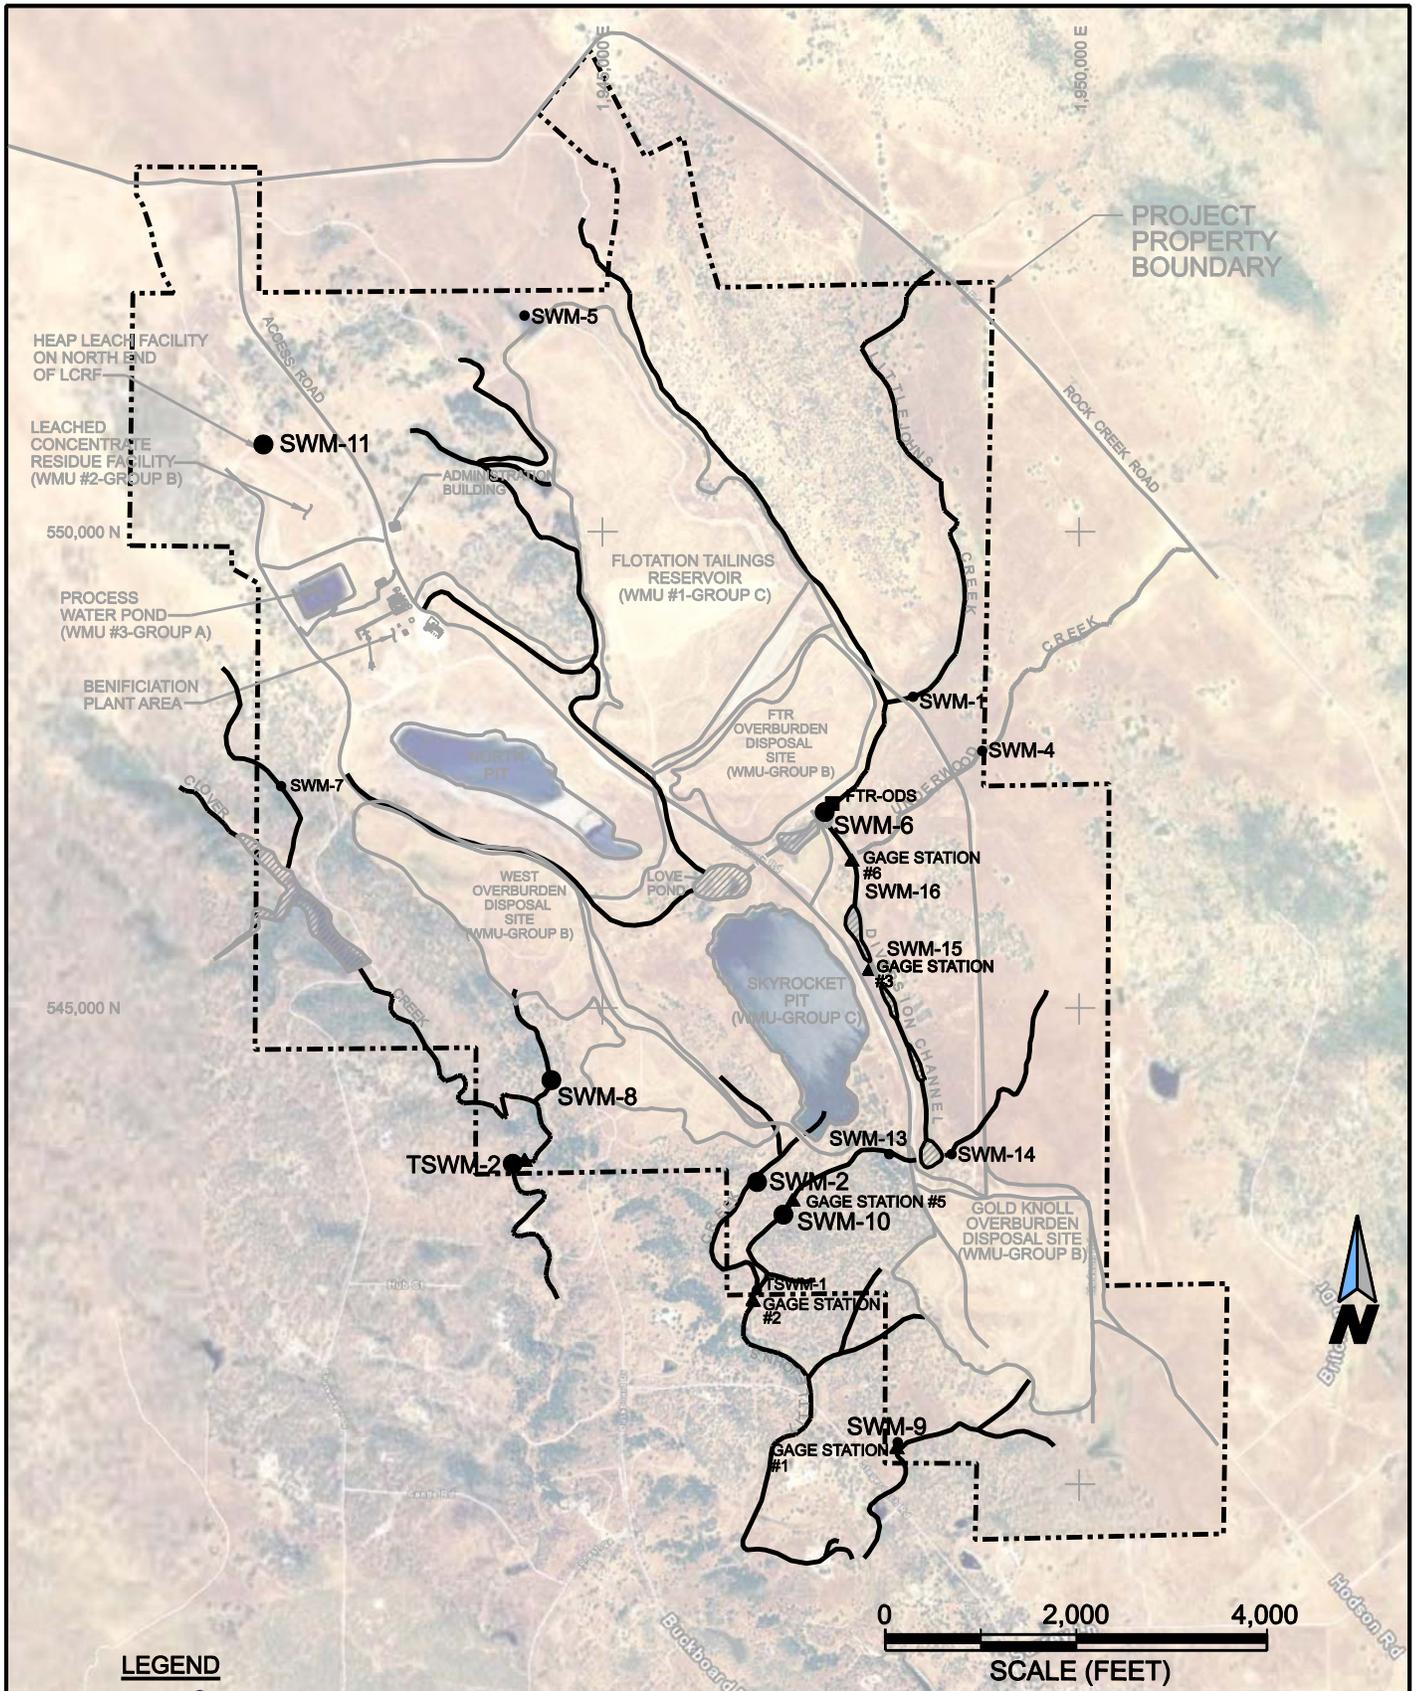

LEGEND

SWM-8 ● SURFACE WATER MONITORING LOCATIONS

GAGE STATION #4 ▲ HYDROLOGIC STATION

NOTE: LARGE SYMBOLS AND LABELS INDICATE MONITORING LOCATIONS THAT ARE PART OF THE MRP. OTHER LOCATIONS ARE SPECIAL SUPPLEMENTAL AND EVALUATION MONITORING LOCATIONS

SURFACE WATER MONITORING LOCATIONS

MERIDIAN BEARTRACK COMPANY
ROYAL MOUNTAIN KING MINE

Figure 1.2B

Sept 27
2007



ORDER NO. R5-2008-0021
ATTACHMENT E
REQUIREMENTS FOR
MONITORING WELL INSTALLATION WORKPLANS AND
MONITORING WELL INSTALLATION REPORTS

Prior to installation of groundwater monitoring wells, the Discharger shall submit a workplan containing, at a minimum, the information listed in Section 1, below. Wells may be installed after staff approve the workplan. Upon installation of the monitoring wells, the Discharger shall submit a well installation report which includes the information contained in Section 2, below. All workplans and reports must be prepared under the direction of, and signed by, a registered geologist or civil engineer licensed by the State of California.

SECTION 1 - Monitoring Well Installation Workplan and
Groundwater Sampling and Analysis Plan

The monitoring well installation workplan shall contain the following minimum information:

A. General Information:

- Purpose of the well installation project
- Brief description of local geologic and hydrogeologic conditions
- Proposed monitoring well locations and rationale for well locations
- Topographic map showing facility location, roads, and surface water bodies
- Large scaled site map showing all existing on-site wells, proposed wells, surface drainage courses, surface water bodies, buildings, waste handling facilities, utilities, and major physical and man-made features

B. Drilling Details:

- On-site supervision of drilling and well installation activities
- Description of drilling equipment and techniques
- Equipment decontamination procedures
- Soil sampling intervals (if appropriate) and logging methods

C. Monitoring Well Design (in narrative and/or graphic form):

- Diagram of proposed well construction details
 - Borehole diameter
 - Casing and screen material, diameter, and centralizer spacing (if needed)
 - Type of well caps (bottom cap either screw on or secured with stainless steel screws)
 - Anticipated depth of well, length of well casing, and length and position of perforated interval
 - Thickness, position and composition of surface seal, sanitary seal, and sand pack
 - Anticipated screen slot size and filter pack

D. Well Development (not to be performed until at least 48 hours after sanitary seal placement):

- Method of development to be used (i.e., surge, bail, pump, etc.)
- Parameters to be monitored during development and record keeping technique
- Method of determining when development is complete
- Disposal of development water

- E. Well Survey (precision of vertical survey data shall be at least 0.01 foot):
Identify the Licensed Land Surveyor or Civil Engineer that will perform the survey
Datum for survey measurements
List well features to be surveyed (i.e. top of casing, horizontal and vertical coordinates, etc.)

- F. Schedule for Completion of Work

G. **Appendix: Groundwater Sampling and Analysis Plan (SAP)**

The Groundwater SAP shall be included as an appendix to the workplan, and shall be utilized as a guidance document that is referred to by individuals responsible for conducting groundwater monitoring and sampling activities.

Provide a detailed written description of standard operating procedures for the following:

- Equipment to be used during sampling
- Equipment decontamination procedures
- Water level measurement procedures
- Well purging (include a discussion of procedures to follow if three casing volumes cannot be purged)
- Monitoring and record keeping during water level measurement and well purging (include copies of record keeping logs to be used)
- Purge water disposal
- Analytical methods and required reporting limits
- Sample containers and preservatives
- Sampling
 - General sampling techniques
 - Record keeping during sampling (include copies of record keeping logs to be used)
 - QA/QC samples
- Chain of Custody
- Sample handling and transport

SECTION 2 - Monitoring Well Installation Report

The monitoring well installation report must provide the information listed below. In addition, the report must also clearly identify, describe, and justify any deviations from the approved workplan.

A. General Information:

Purpose of the well installation project

Brief description of local geologic and hydrogeologic conditions encountered during installation of the wells

Number of monitoring wells installed and copies of County Well Construction Permits

Topographic map showing facility location, roads, surface water bodies

Scaled site map showing all previously existing wells, newly installed wells, surface water bodies, buildings, waste handling facilities, utilities, and other major physical and man-made features.

B. Drilling Details (in narrative and/or graphic form):

On-site supervision of drilling and well installation activities

Drilling contractor and driller's name

Description of drilling equipment and techniques

Equipment decontamination procedures

Soil sampling intervals and logging methods

Well boring log

- Well boring number and date drilled
- Borehole diameter and total depth
- Total depth of open hole (same as total depth drilled if no caving or back-grouting occurs)
- Depth to first encountered groundwater and stabilized groundwater depth
- Detailed description of soils encountered, using the Unified Soil Classification System

C. Well Construction Details (in narrative and/or graphic form):

Well construction diagram, including:

- Monitoring well number and date constructed
- Casing and screen material, diameter, and centralizer spacing (if needed)
- Length of well casing, and length and position of perforated interval
- Thickness, position and composition of surface seal, sanitary seal, and sand pack
- Type of well caps (bottom cap either screw on or secured with stainless steel screws)

E. Well Development:

Date(s) and method of development

How well development completion was determined

Volume of water purged from well and method of development water disposal

Field notes from well development should be included in report

F. Well Survey (survey the top rim of the well casing with the cap removed):

Identify the coordinate system and datum for survey measurements

Describe the measuring points (i.e. ground surface, top of casing, etc.)

Present the well survey report data in a table

Include the Registered Engineer or Licensed Surveyor's report and field notes in appendix