

Attachment "B"



CITY OF COACHELLA

1515 SIXTH STREET, COACHELLA, CALIFORNIA 92236

PHONE (760) 398-3502 • FAX (760) 398-8117 • WWW.COACHELLA.ORG

October 22, 2008

Mr. Jose Angel, P.E.
Assistant Executive Officer
California Regional Water Quality Control Board
Colorado River Basin Region
73-720 Fred Waring Drive, Suite 100
Palm Desert, CA 92260

RE: ADMINISTRATIVE CIVIL LIABILITY COMPLAINT NO. R7-2008-0016

Dear Mr. Angel:

This letter is in response to the Administrative Civil Liability Complaint No. R7-2008-0016- for Mandatory Minimum Penalty; an action against the Coachella Sanitary District Municipal Wastewater Treatment Plant, Riverside County. The City of Coachella acknowledges the Administrative Civil liability and does not contest the findings included in your correspondence dated August 27, 2008. The district intends to use a portion of the civil liability for a Supplemental Environmental Project listed as follows.

1. An Overflow Drain Project for one of our City passive parks (Chichenitza/Puerto Escondido/Agua Blanca) - Vertical Drain systems to 2 Drywells systems will be assembled to address the local flooding issue. Total cost for the project will be \$59,942.30. A detailed estimate herewith is enclosed.
2. Construction of Catch Basins for Valley Road Drainage System- Construct and connect catch basins to existing storm drain on Valley Road to address street flooding impacting health and safety of residents. The total estimated cost for the project is \$64,020.00.

Should you have any questions or need additional information please contact Paul Toor Public Works Director at 760-398-3502 ext. 133.

Sincerely,

Tim Brown
City Manager

RECEIVED

OCT 31 2008

REGION 7

Coachella Sanitary District
Administrative Civil Liability
Order No. R7-2008-0071

c.c. Paul Toor, Public Works Director
Gerardo (Jerry) R. Jimenez Superintendent of Sanitation

Enclosed: Cost Estimates

PASSIVE PARK DRAINAGE REMEDIATION PROJECT AT TRACT 30684
CHICHENITZA/PUERTO ESCONDIDO/AGUA BLANCA- COACHELLA, CALIFORNIA

HISTORY:

In the past the drainage system in two passive parks, located in Tract 30684 have failed due to the high clay content of the upper layers of the soil. This condition leaves standing water leading to insect issues and makes the park unsuitable for use as a passive park.

PROJECT:

The City of Coachella will install six vertical drains, as shown on the attached exhibit, the vertical drains will allow the water to drain into the sandy layer between clay layers and eventually captured by the CVWD agriculture drainage system.


The system will resolve the above mentioned issues that currently exist.

SCHEDULE:

Plans and specifications are being prepared and the project and will be advertised in December 2008 and work will be completed by July 31, 2009.

PARK DRYWELL REMEDIATION AND VERTICAL DRAINS						
CITY PROJECT 2008-16-Chichenitza/Puerto Escondido/Agua Blanca						
ITEM	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	METHOD OF PAY	EXTENSION
1	DRILL AND INSTALL 8" DIA VERTICAL DRAINS COMPLETE	EA	6	\$5,790.50	AQ	\$34,743.00
2	FURNISH AND INSTALL 4' DIA. 8' DEEP CATCH BASIN	EA	1	\$7,000.00	AQ	\$7,000.00
3	FURNISH AND INSTALL 8" PVC PIPING	LF	150	\$55.00	AQ	\$8,250.00
4	DRILL EXPLORATORY SOILS WELL	EA	2	\$2,250.00	AQ	\$4,500.00

SUB TOTAL	\$54,493.00
CONTINGENCY @ 10%	\$5,449.30
GRAND TOTAL	\$59,942.30

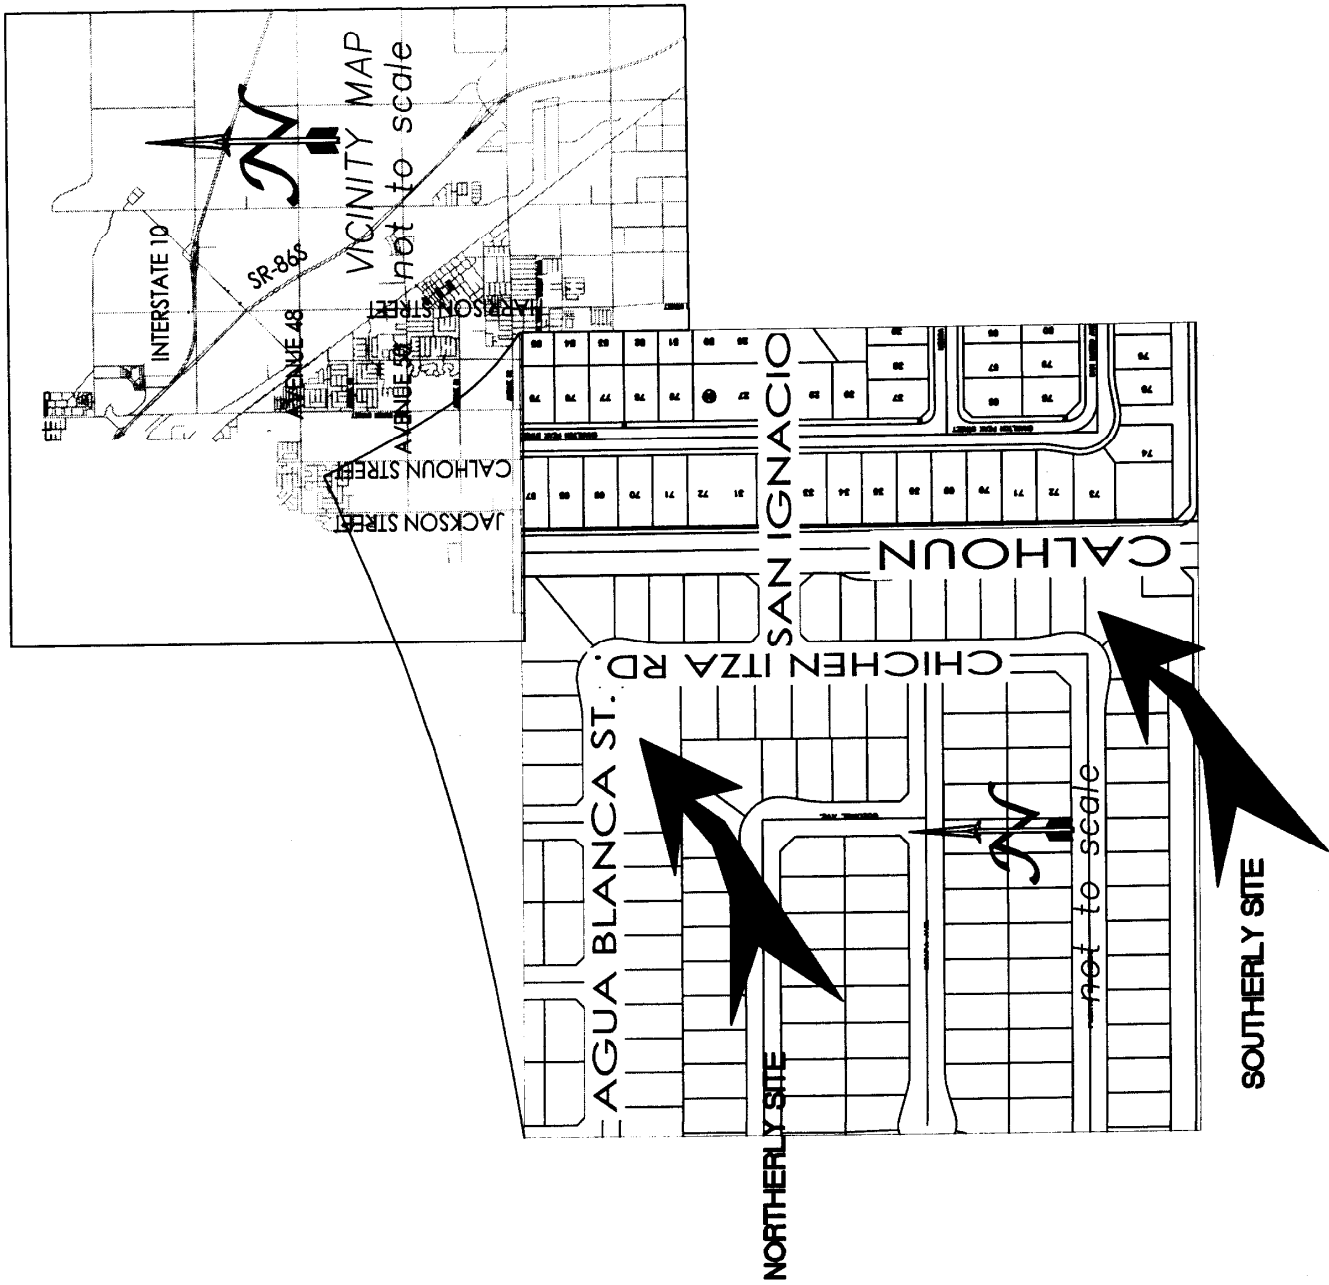

CONSTRUCT CATCH BASINS AND CONNECT TO STORM DRAIN SYSTEM
VALLEY ROAD
COACHELLA, CALIFORNIA

HISTORY:

In the past the drainage system on Valley Road (between Harrison St. & Shady Lane) has failed due to an insufficient amount of catch basins. This condition leaves standing water leading to insect issues, odors, and unsafe roadways impacting health and safety of residents.

PROJECT:

The City of Coachella will construct and connect catch basins to the existing storm drain system on Valley Road.

The system will resolve the above mentioned issues that currently exist.

SCHEDULE:


Plans and specifications are being prepared and the project and will be advertised in December 2008 and work will be completed by July31, 2009.

City of Coachella
Valley Road Drainage System

Provide all labor, equipment, and materials to construct the following items:

ITEM & DESCRIPTION	QUANTITY	UNIT PRICE	TOTAL
DESIGN	1 - LS	\$ 3,000.00	\$ 3,000.00
MOBILIZATION	1 - LS	\$ 5,000.00	\$ 5,000.00
EXCAVATION, ROAD REPAIR AND BACK FILL	1 - LS	\$ 6,657.00	\$ 6,657.00
Survey	1 - LS	\$ 943.00	\$ 943.00
8' WIDE CATCH BASIN (CITY STD. - 1.1)	3 - EA	\$ 8,000.00	\$ 24,000.00
30" RCP STORM DRAIN PIPE (LCS-2000D)	120 LF	\$ 155.00	\$18,600.00
		SUB-TOTAL	\$ 58,200.00
10% CONTINGENCY			\$ 5,820.00
		Total	\$ 64,020.00

Coachella Sanitary District
Administrative Civil Liability
Order No. R7-2008-0071

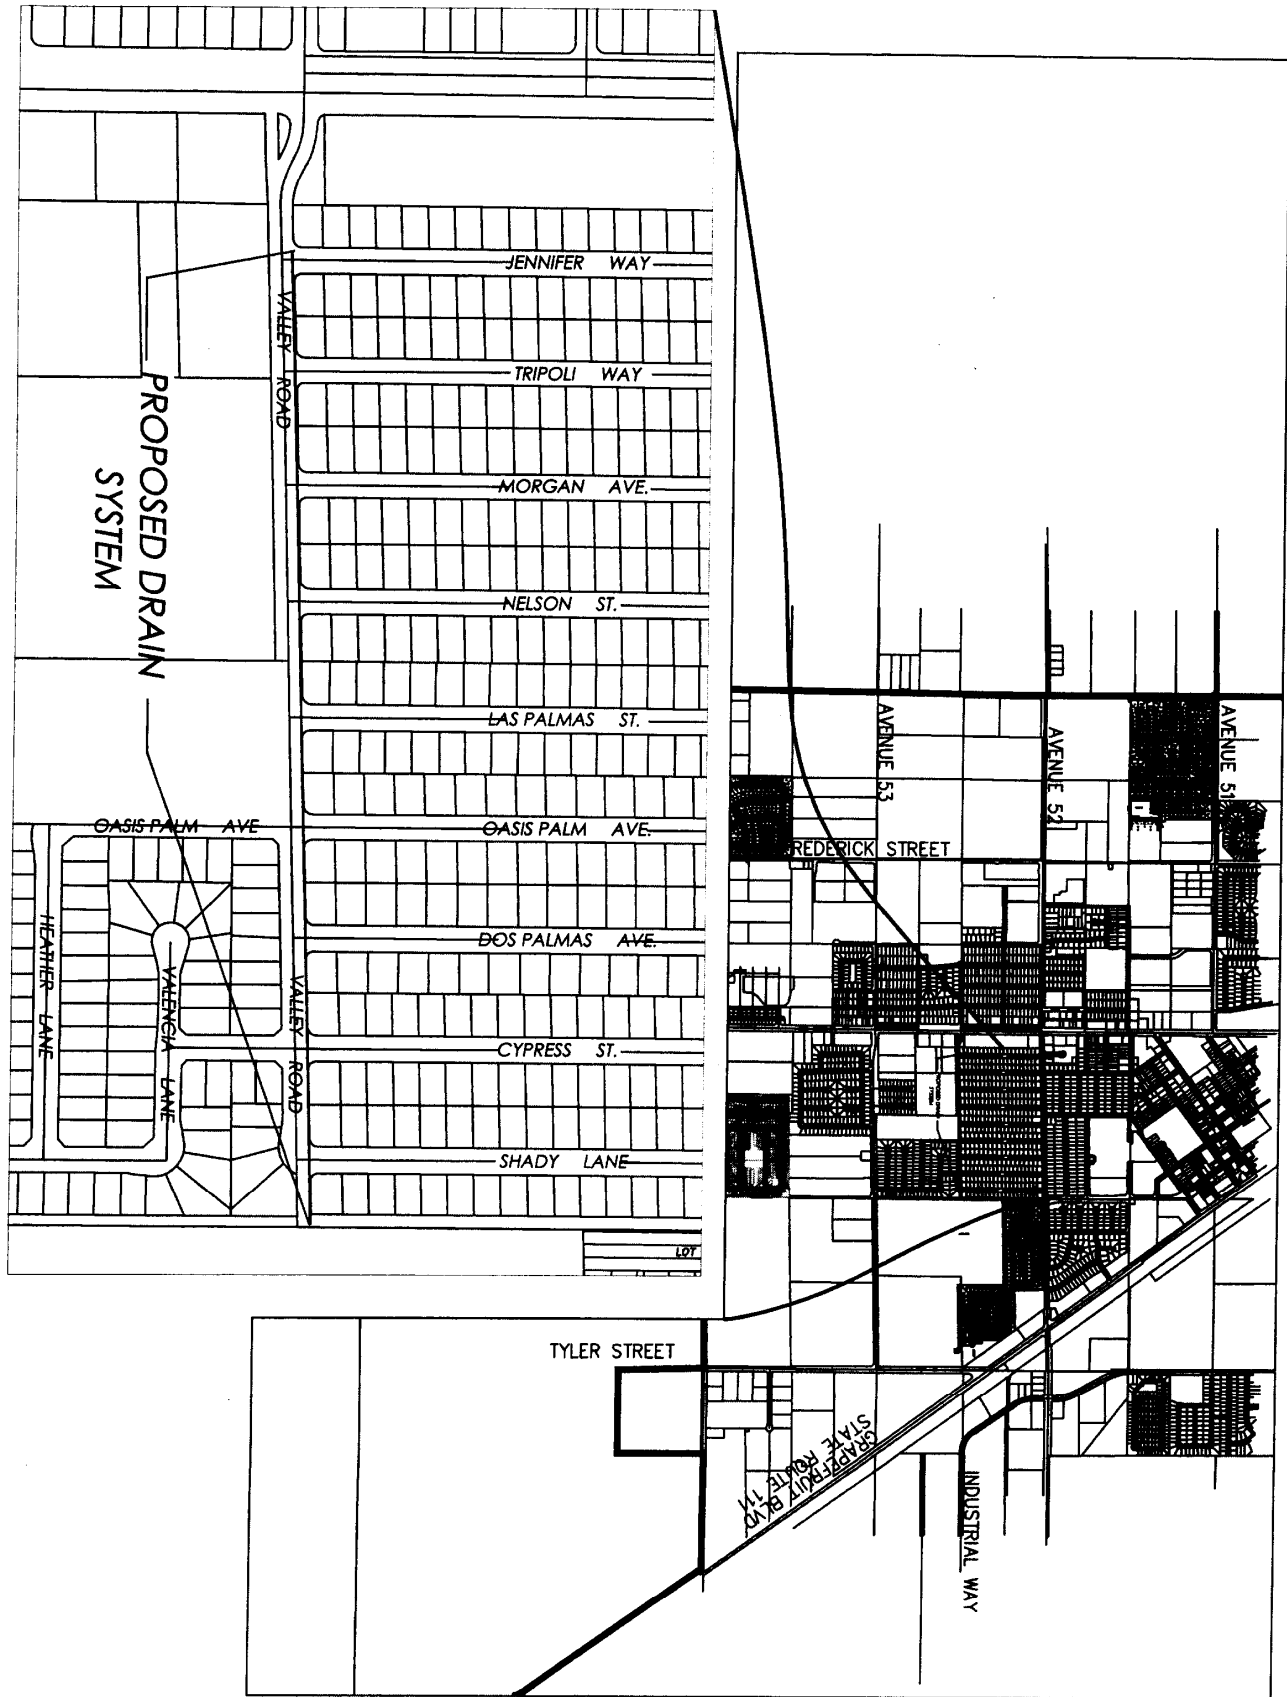

Coachella Sanitary District
Administrative Civil Liability
No. R7-2008-0016

**STIPULATED TIME SCHEDULE
FOR THE IMPLEMENTATION OF SUPPLEMENTAL ENVIRONMENTAL PROJECTS**

<u>DESCRIPTION OF SEP</u>	<u>COMPLETION DATE</u>	<u>DUE DATE</u>	<u>PORTION OF ACL THAT MAY BE SUSPENDED</u>
Vertical Drain System To Two Dry Wells in Chichenitza/ Puerto Escondido/Agua Blanca Passive Park/Flood Overflow	July 31, 2009	Final Report Due On Or Before 8/30/2009	\$59,942.30
Construct Catch Basins On Valley Road Storm Drain To Address Street Flooding	July 31, 2009	Final Report Due On Or Before 8/30/2009	\$64,020.00