

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL VALLEY REGION

**Fresno Office**  
1685 "E" Street  
Fresno, CA 93706-2007

**Sacramento Office (Main)**  
11020 Sun Center Drive #200  
Rancho Cordova, CA 95670-6114

**Redding Office**  
364 Knollcrest Drive #205  
Redding, CA 96002

[Regional Board Website](https://www.waterboards.ca.gov/centralvalley) (https://www.waterboards.ca.gov/centralvalley)

---

**[TENTATIVE] WASTE DISCHARGE REQUIREMENTS ORDER  
R5-2022-XXXX**

---



**ORDER INFORMATION**

<b>Order Type:</b>	Waste Discharge Requirements (WDRs)
<b>Status:</b>	Tentative
<b>Program:</b>	Title 27 Discharges to Land
<b>Region 5 Office:</b>	Redding
<b>Discharger:</b>	Butte County
<b>Facility:</b>	Neal Road Class III Municipal Solid Waste Landfill
<b>Address:</b>	1023 Neal Road, Chico, California
<b>County:</b>	Butte County
<b>Parcel No.:</b>	040-600-082
<b>WDID:</b>	5A040300001
<b>Prior Order(s):</b>	R5-2011-0049-01

## **CERTIFICATION**

I, PATRICK PULUPA, Executive Officer, hereby certify that the following is a full, true, and correct copy of the order adopted by the California Regional Water Quality Control Board, Central Valley Region, on \_\_\_\_\_ February 2022.

---

PATRICK PULUPA,  
Executive Officer

## **REGIONAL BOARD INFORMATION**

### **Sacramento Office (Main)**

Rancho Cordova, CA 95670-6114  
11020 Sun Center Drive #200  
Telephone: (916) 464-3291

### **Fresno Office**

1685 "E" Street  
Fresno, CA 93706-2007  
Telephone: (559) 445-5116

### **Redding Office**

364 Knollcrest Drive #205  
Redding, CA 96002  
Telephone: (530) 224-4845

### **[Regional Board Website](https://www.waterboards.ca.gov/centralvalley)**

(<https://www.waterboards.ca.gov/centralvalley>)

## TABLE OF CONTENTS

<b>Glossary</b> .....	<b>vi</b>
<b>Findings</b> .....	<b>1</b>
Introduction .....	1
Materials Accompanying Order.....	2
Facility.....	2
Waste Classification & Permitting .....	3
Alternative Daily Cover / Intermediate Cover (Operating Landfill Units).....	5
Site Conditions.....	6
Monitoring Networks .....	8
Water Quality Protection Standard.....	12
Corrective Action.....	12
Enforcement .....	12
WMU Construction.....	14
WMU Closures.....	16
Post-Closure Maintenance & Financial Assurances .....	18
California Environmental Quality Act.....	19
Other Regulatory Matters.....	19
Reporting Requirements .....	20
Procedural Matters.....	21
<b>Requirements</b> .....	<b>22</b>
A. WMU Discharge Prohibitions.....	22
B. WMU Discharge Specifications .....	22
C. Facility Specifications .....	27

D. WMU Construction Specifications .....	25
E. WMU Closure & Post-Closure Maintenance Specifications.....	28
F. Financial Assurances .....	28
G. Monitoring Requirements .....	29
H. Reporting Requirements.....	30
I. Time Schedule.....	31
J. Other Provisions.....	31
<b>Attachment A—Site Location Map.....</b>	<b>35</b>
<b>Attachment B—Facility Features Map.....</b>	<b>36</b>
<b>Standard Provisions &amp; Reporting Requirements .....</b>	<b>37</b>
A. Applicability.....	37
B. Terms and Conditions .....	38
C. Standard Prohibitions .....	40
D. Standard Discharge Specifications.....	41
E. Standard Facility Specifications.....	42
F. Standard Construction Specifications.....	44
G. Standard Closure and Post-Closure Specifications .....	48
H. Standard Financial Assurance Provisions .....	52
I. Standard Monitoring Specifications .....	53
J. Response to Release .....	64
K. General Provisions .....	66
L. Storm Water Provisions.....	69
<b>Information Sheet.....</b>	<b>72</b>

**Table Index**

Table 1—Summary of Waste Management Units (WMUs) Permitted under Order..... 1  
Table 2—Landfill as “Existing Units” under Title 27 ..... 5  
Table 3—Seismic Analysis ..... 8  
Table 4—Groundwater Monitoring Well Network ..... 9  
Table 5—Unsaturated Zone Monitoring Network ..... 10  
Table 6—Surface Water Monitoring Network ..... 11  
Table 7—Unit Closure Schedule ..... 17  
Table 8—Current Cost Estimates (Financial Assurances) ..... 18  
Table 9—Authorized Waste Discharges at Facility ..... 23  
Table 10—Time Schedule ..... 31

## GLOSSARY

<b>ADC</b> .....	Alternative Daily Cover
<b>Antidegradation Policy</b> .....	Statement of Policy with Respect to Maintaining High Quality Waters in California, State Water Board Resolution 68-16
<b>Basin Plan</b> .....	<i>Water Quality Control Plan for the Sacramento and San Joaquin River Basins</i>
<b>bgs</b> .....	Below Ground Surface
<b>CalRecycle</b> .....	California Department of Resources Recycling and Recovery
<b>CAMP</b> .....	Corrective Action Monitoring Program
<b>CEQA</b> .....	California Environmental Quality Act
<b>CEQA Guidelines</b> .....	California Code of Regulations, Title 14, section 15000 et seq.
<b>C.F.R.</b> .....	Code of Federal Regulations
<b>cm/sec</b> .....	centimeters per second
<b>COCs</b> .....	Constituents of Concern
<b>CPMP</b> .....	Closure and Post-Closure Maintenance Plan
<b>CQA</b> .....	Construction Quality Assurance
<b>Designated Waste</b> .....	(a) Hazardous Waste subject to variance from management requirements per Health and Safety Code section 25143; and (b) Nonhazardous Waste containing pollutants that, under ambient conditions, could be released in concentrations exceeding applicable WQOs, or that could reasonably be expected to affect beneficial uses of water. (Wat. Code, § 13173.)
<b>DMP</b> .....	Detection Monitoring Program

<b>DTSC</b> .....	California Department of Toxic Substances Control
<b>FEMA</b> .....	Federal Emergency Management Agency
<b>GCL</b> .....	Geosynthetic Clay Liner
<b>Hazardous Waste</b> .....	Wastes which, pursuant to Title 22, section 66261.3 et seq., are required to be managed in accordance with Division 4.5 of Title 22. (Title 27, § 20164; Title 23, § 2521(a).)
<b>JTD</b> .....	Joint Technical Document
<b>LEA</b> .....	Local Enforcement Agency
<b>Leachate</b> .....	Liquid formed by the drainage of liquids from waste or by the percolation or flow of liquid through waste. Leachate includes any constituents extracted from the waste and dissolved or suspended in the fluid. (Title 27, § 20164.)
<b>LCRS</b> .....	Leachate Collection and Removal System
<b>LFG</b> .....	Landfill Gas
<b>MDB&amp;M</b> .....	Mount Diablo Base and Meridian
<b>MDL</b> .....	Method Detection Limit
<b>NOAA</b> .....	National Oceanic and Atmospheric Administration
<b>µg/L</b> .....	Micrograms per Liter
<b>mg/L</b> .....	Milligrams per Liter
<b>MPE</b> .....	Maximum Probable Earthquake
<b>MSL</b> .....	Mean Sea Level
<b>MRP</b> .....	Monitoring and Reporting Program

<b>MSW</b> .....	Municipal Solid Waste regulated under 40 C.F.R. part 258
<b>MSWLF</b> .....	Municipal Solid Waste Landfill
<b>MW</b> .....	Monitoring Well
<b>SPRRs</b> .....	Standard Provisions and Reporting Requirements
<b>Subtitle D</b> .....	USEPA-promulgated MSW regulations under RCRA (see 40 C.F.R. part 258)
<b>RCRA</b> .....	Resource Conservation and Recovery Act
<b>ROWD</b> .....	Report of Waste Discharge
<b>State Water Board</b> .....	State Water Resources Control Board
<b>Title 22</b> .....	California Code of Regulations, Title 22
<b>Title 23</b> .....	California Code of Regulations, Title 23
<b>Title 27</b> .....	California Code of Regulations, Title 27
<b>USEPA</b> .....	United States Environmental Protection Agency
<b>VOCs</b> .....	Volatile Organic Compounds
<b>WDRs</b> .....	Waste Discharge Requirements
<b>WMU</b> .....	Waste Management Unit
<b>WQOs</b> .....	Water Quality Objectives
<b>WQPS</b> .....	Water Quality Protection Standard



**FINDINGS**

The Central Valley Regional Water Quality Control Board (Central Valley Water Board) hereby finds as follows:

**Introduction**

1. Butte County (Discharger) owns and operates the Neal Road Class III Municipal Solid Waste Landfill (Facility) and one Class II surface impoundment about 7 miles southeast of Chico, in Sections 14 and 15, T21N, R2E, Mount Diablo Base and Meridian (MDB&M). The Facility’s location is depicted on the Site Location Map in **Attachment A**.
2. As the Facility’s owner and operator, the Discharger is responsible for compliance with this Order, which prescribes Waste Discharge Requirements (WDRs) regulating monitoring, operation, closure and post-closure maintenance of the Waste Management Units (WMUs or Modules) listed in **Table 1**.

**Table 1—Summary of Waste Management Units (WMUs) Permitted under Order**

<b>Unit</b>	<b>Type</b>	<b>Class</b>	<b>Size</b>	<b>Status</b>
Module 1	Landfill	Class III	23 acres	Closed
Module 2	Landfill	Class III	16.5 acres	Closed
Module 3	Landfill	Class III	26.5 acres	Closed
Module 4	Landfill	Class III	32 acres	Operating
Module 5	Landfill	Class III	38 acres	Operating
Leachate Impoundment	Surface Impoundment	Class II	3.5 acres	Operating

See Glossary for definitions of terms and abbreviations in table.

### **Materials Accompanying Order**

3. The following materials are attached to this Order, and incorporated herein:

Attachment A—Site Location Map

Attachment B—Facility Features Map

Standard Provisions & Reporting Requirements for Non-Hazardous Discharges of Waste Regulated under Subtitle D and/or Title 27, December 2015 Edition (SPRRs or Standard Provisions)

Information Sheet for [Tentative] Waste Discharge Requirements Order R5-2022-XXXX (Information Sheet)

4. This Order is also accompanied by the concurrently adopted **Monitoring & Reporting Program R5-2022-XXXX (MRP)**, the provisions of which are incorporated as part of this Order. Each time the operative MRP is modified by the Central Valley Water Board or its Executive Officer, the revised version shall become the operative MRP (superseding the prior version) and be incorporated as part of this Order (i.e., in lieu of the prior version).
5. To the extent there are any material inconsistencies between the provisions of this Order, the operative MRP and the SPRRs, the provisions of this Order shall be controlling. However, to the extent a revised MRP contains new or different factual findings reflecting changed conditions or circumstances at the Facility, the revised MRP findings shall be controlling.
6. Additional information about the Facility is set forth in the **Information Sheet**, which is incorporated as part of these findings. (See Finding 3.)

### **Facility**

7. The Facility includes the following onsite features, systems and structures:
- a. Power Plant
  - b. Landfill Gas Flare Unit
  - c. Septage Transfer Station
  - d. Groundwater Monitoring Wells

- e. Vadose Zone Monitoring Lysimeters
- f. Landfill Gas Monitoring Probes
- g. Scale Facility
- h. Resource Recovery Area
- i. Maintenance Building
- j. Leachate Impoundment
- k. Primary Sedimentation Basin
- l. Basin No. 2
- m. Basin No. 3
- n. Basin No. 4
- o. Soil Stockpile Area

### **Waste Classification & Permitting**

8. The Facility's landfill is subject to federal Municipal Solid Waste (MSW) regulations promulgated under the Resource Conservation and Recovery Act (RCRA) (42 U.S.C. § 6901 et seq.). Typically referred to as "Subtitle D," these regulations are now codified as 40 C.F.R. part 258 and implemented in part through the provisions of California Code of Regulations, Title 27 (Title 27) and in accordance with State Water Resources Control Board (State Water Board) Resolution 93-62.
9. On 10 June 2011, the Central Valley Water Board adopted WDRs Order R5-2011-0049, which was amended on 16 April 2020 by R5-2011-0049-01. WDRs Order R5-2011-0049-01 continued to classify the Facility's active WMUs as Class III units for the discharge of MSW, and the Facility's Class II surface impoundment for the discharge of leachate. This Order continues such classification, which is set forth above in **Table 1**.
10. On 19 June 2020, the Discharger submitted an updated Report of Waste Discharge (ROWD) as part of its Joint Technical Document (JTD) for the Facility. Information in the JTD was used in the development of this Order.

11. On 21 October 2020, the JTD (ROWD) was deemed complete.
12. On 17 March 2021, Central Valley Water Board staff received notification that the Discharger intended to accept treated wood waste (TWW) for disposal at the Facility. Treated Wood Waste may contain chemicals such as chromated copper arsenate (CCA), pentachlorophenol, creosote, acid copper chromate (ACC), ammoniacal copper arsenate (ACA), ammoniacal copper zinc arsenate (ACZA), or chromated zinc chloride (CZC). This Order authorizes the discharge of treated wood waste to composite-lined WMUs specified in **Section 0** and **Table 9**, provided that the Discharger complies with Health and Safety Code, Article 11.2 Section 25230 et seq., and outlined in Assembly Bill 332.
13. The Discharger proposes to discharge asbestos-containing waste (i.e., >1% asbestos) at the Facility. Although asbestos-containing waste is classified as “hazardous” under Title 22, the discharge of such waste does not pose a threat to water quality and is therefore authorized for Modules 4 and 5 as specified in **Section B.1** and **Table 9**. (Health & Saf. Code, § 25143.7.) **Section I, Table 10**, Time Schedule Item Number 4 requires the Discharger to submit the written asbestos containing waste program for approval prior to accepting asbestos containing waste.
14. In addition to dispersal at the WMU of origin and use as dust control, the Discharger proposes to continue discharging **Leachate** and **Landfill Gas Condensate** extracted from Modules 2, 4 and 5 to the Leachate Impoundment. (See Title 27, § 20340.) The WMUs proposed to receive the Leachate and Landfill Gas Condensate have a functioning leachate collection and removal system (LCRS). The Leachate Impoundment has a functioning leakage detection system (LDS) and already contains waste similar in classification and characteristics to the WMUs of origin. The application of leachate and condensate in compliance with the WDRs will not result in the WMUs exceeding their moisture-holding capacity. Further the receiving WMUs will continue to comply with Title 27, section 20200. Leachate placed in the Leachate Impoundment is evaporated or hauled off-site and disposed at a Publicly-Owned Treatment Plant.
15. The landfills in **Table 2** are categorized as **Existing Units** under Title 27 (see Title 27, § 20164), and if unclosed, may continue to accept waste within their “existing footprint,” depicted in **Attachment B**, provided: (a) waste receipts are sufficient to comply with financial assurances requirements (Title 27, § 21110); and (b) early closure is not required due to environmental impacts and/or other regulatory concerns. The “existing footprint” is the area of the landfill covered by

waste as of the date that the landfill became subject to federal “Subtitle D” regulations. (See Title 27, § 20164.)

**Table 2—Landfill as “Existing Units” under Title 27**

Unit	Description
Module 1	Pre-Subtitle D, closed, unlined unit. Final cover consists of a one-foot vegetative layer, overlying a geocomposite drainage layer, overlying a 40-mil high-density polyethylene (HDPE) geomembrane, overlying a one-foot low-permeability soil layer, overlying a one-foot foundation layer.
Module 2	Closed, lined unit. Final cover consists of a two-foot thick clay liner overlain by a one-foot thick granular LCRS and closed with a one-foot vegetative layer, overlying a geocomposite drainage layer, overlying a 40-mil HDPE geomembrane, overlying a one-foot low-permeability soil layer, overlying a one-foot foundation layer.
Module 3	Pre-Subtitle D, closed, unlined unit. Final cover consists of a one-foot vegetative layer, overlying a geocomposite drainage layer, overlying a 40-mil HDPE geomembrane, overlying a one-foot low-permeability soil layer, overlying a one-foot foundation layer.

See Glossary for definitions of terms and abbreviations in table.

**Alternative Daily Cover / Intermediate Cover  
 (Operating Landfill Units)**

16. In lieu of the daily cover required per Title 27, section 20680, the Discharger proposes to use an approved alternative daily cover (ADC) (see Title 27, §§ 20690, 20705), which consists of finely ground (1-inch or smaller) green waste, dried sludge materials, shredded tires, construction and demolition wastes, and geosynthetic tarps.
17. The proposed ADC has already been approved by the Local Enforcement Agency (LEA) and is hereby also approved by the Central Valley Water Board for use at the Facility.

18. In accordance with Title 27, section 20705, the Discharger has demonstrated that its proposed ADC materials: (a) will minimize percolation of liquids through waste; and (b) are consistent with the classification of the WMU to which they are to be applied. The approved ADC material constituents and breakdown products are also included as part of the Water Quality Protection Standard (WQPS) set forth in the MRP.
19. Intermediate cover used at the Facility consists of a one-foot thick layer of compacted native soil.

### **Site Conditions**

20. The Facility is located in rolling hills along the eastern edge of the Sacramento Valley. The area is characterized by topographic plateaus separated by steep ravines and canyons. The landfill has been developed in a northeast/southwest-trending canyon eroded into a gently sloping plateau. Elevations at the Facility range from about 410 feet mean sea level (MSL) at the northeastern perimeter of the Facility to about 210 feet MSL at the southwestern perimeter.
21. The geologic conditions in this region are dominated by the Tuscan Formation. Near the Facility, the Tuscan Formation is nearly flat-lying and has been eroded into a series of northeast trending plateaus and ridges separated by moderately incised valleys. The Tuscan Formation consists of a wide variety of volcanic and volcanic-related sediments ranging from fine grained siltstone to a lithified mud flow. The total thickness of the Tuscan Formation ranges from about 300 feet in the Sacramento Valley to about 1,500 feet in the Cascade Range.
22. The Facility overlies volcanic deposits of the Tuscan Formation. It is underlain by a series of interlayered sandstone, tuff-breccia, and lahar deposits. The sandstones are typically fine to coarse grained and contain up to 4-percent silt. The lahar deposits are well-cemented and frequently fractured and jointed. Fractures are usually open and approximately one-fourth inch wide. The clayey sands of the Tuscan Formation immediately underlying the Facility have in-situ permeabilities ranging from  $2 \times 10^{-4}$  centimeters per second (cm/sec) to  $3 \times 10^{-3}$  cm/sec.
23. Groundwater at the Facility is unconfined. Over the past 25 years, groundwater has been measured at an elevation ranging from a high of approximately 153 feet MSL in Monitoring Well (MW)-4A to 120 feet MSL in Monitoring Well MW-10A. The depth to water beneath the landfill ranges from approximately 125

to 138 feet bgs. Capillary rise beneath the landfill has been estimated to be less than two feet.

24. The direction of groundwater flow is to the southwest, with an average groundwater gradient of approximately 0.002 to 0.004 feet per foot. The average groundwater velocity is approximately 46 feet per year.
25. Land use within one mile of the Facility is primarily zoned as agricultural use (AG) with minimum parcels of 20 to 160 acres. There is also an industrial facility to the south of the Facility that is used as a construction yard with concrete processing and soil stockpiles. The surrounding land within one mile of the Facility consists of the construction yard, open grazing land and an inactive poultry ranch one-half mile south of the Facility.
26. Surface drainage is toward Hamlin Slough, an intermittent tributary to Butte Creek in the Upper Little Chico Hydrologic Area of the Butte Creek Hydrologic Unit. The beneficial uses of Hamlin Slough are not identified in the Basin Plan, however the Basin Plan states, "The beneficial uses of any specifically identified water body generally apply to its tributary streams". According to the Central Valley Water Board's *Water Quality Control Plan for the Sacramento and San Joaquin River Basins* (Basin Plan), the beneficial uses of the Butte Creek include: municipal and domestic use (MUN); agricultural irrigation and agricultural stock watering (AGR), hydropower generation, contact recreation (REC-1), warm fresh water habitat (WARM) and cold freshwater habitat (COLD), cold water fish migration (MIGR), warm and cold water fish spawning (SPWN), and wildlife habitat (WILD).
27. According to the Basin Plan, the designated beneficial uses of the groundwater, as specified in the Basin Plan, are municipal and domestic water supply, agricultural supply, industrial service supply, and industrial process supply.
28. There are two industrial groundwater supply wells within one mile of the Facility. One is the water supply well for the Facility, and the other is located at the inactive poultry ranch one half mile southwest of the Facility.
29. Class III WMUs must be designed and constructed to withstand a maximum probable earthquake (MPE). (Title 27, § 20370.) The Discharger's site-specific seismic analysis indicates that an earthquake, occurring along the Sierra Foothills fault system, at a closest rupture distance of 20 miles, would result in the event summarized in **Table 3**.

**Table 3—Seismic Analysis**

Earthquake	Magnitude	Peak Ground Acceleration	Return Period
Maximum Probable (MPE)	6.0	0.18 g	975 Years

30. Based on data from the nearest weather station (Oroville Weather Station, 14 miles southeast), the Facility has an annual average precipitation of 29 inches, and a mean pan evaporation of 50 inches per year. The nearest weather station is reflective of conditions at the Facility.
31. WMUs must be constructed to accommodate storm water runoff from 24-hour precipitation events with a return period of 100 years for Class III WMUs, and a return period of 1,000 years for Class II WMUs. (See Title 27, § 20320.) According to National Oceanic and Atmospheric Administration’s (NOAA) Precipitation Frequency Atlas 14, Volume 6 (rev. 2014), the Facility’s 100-year and 1,000-year, 24-hour rainfall events are estimated to result in 6.7 inches and 8.8 inches of precipitation, respectively. Source: [NOAA Precipitation Frequency Data Server](https://hdsc.nws.noaa.gov/hdsc/pfds) (<https://hdsc.nws.noaa.gov/hdsc/pfds>).
32. Storm water and sedimentation basins are situated towards the western end of the Facility and include the Primary Sedimentation Basin, Basin No. 2, Basin No. 3, and Basin No. 4, as depicted in **Attachment B**. Storm water is retained within Basins No. 2, 3, and 4 except following extremely high precipitation events when it flows into the Primary Sedimentation Basin and hydraulically connected surface water drainages. The Facility is covered under the State Water Board’s operative General Permit for Storm Water Discharges Associated with Industrial Activities, NPDES Permit No. CAS000001 (Industrial General Permit) with Waste Discharge Identification Number 5R04I000249.
33. According to the Federal Emergency Management Agency’s (FEMA) [Flood Insurance Rate Map](https://msc.fema.gov/portal) (<https://msc.fema.gov/portal>), the Facility is not located within a 100-year floodplain.

**Monitoring Networks**

34. As of the date of this Order, the Facility’s **groundwater** monitoring network consists of the existing monitoring wells listed in **Table 4**.



**Table 4—Groundwater Monitoring Well Network**

<b>Well</b>	<b>Program</b>	<b>Monitored Unit</b>	<b>Status</b>
MW-3	Corrective Action	Modules 1,2,3	Operational
MW-4A	Background	N/A	Operational
MW-6	Detection	Module 4	Operational
MW-7	Detection	Module 4	Operational
MW-8B	Corrective Action	Modules 1,2,3	Operational
MW-9B	Corrective Action	Modules 1,2,3	Operational
MW-10A	Detection	Module 5, Leachate Impoundment	Operational
MW-11	Detection	Module 4	Operational
MW-12	Detection	Module 5	Operational
MW-13	Background	N/A	Operational

See Glossary for definitions of terms and abbreviations in table.

35. As of the date of this Order, the Facility’s **unsaturated zone** monitoring network consists of the existing monitoring points listed in **Table 5**.

**Table 5—Unsaturated Zone Monitoring Network**

<b>Monitoring Point</b>	<b>Device Type</b>	<b>Program</b>	<b>Monitored Unit</b>	<b>Status</b>
SP1	Gas monitoring probe	Detection	Southern Facility Perimeter	Operational
SP2	Gas monitoring probe	Detection	Southern Facility Perimeter	Operational
SP3	Gas monitoring probe	Detection	Eastern Facility Perimeter	Operational
SP4	Gas monitoring probe	Detection	Northern Facility Perimeter	Operational
SP5	Gas monitoring probe	Detection	Northern Facility Perimeter	Operational
SP6	Gas monitoring probe	Detection	Northern Facility Perimeter	Operational
SP7	Gas monitoring probe	Detection	Southern Facility Perimeter	Operational
SP8	Gas monitoring probe	Detection	Southern Facility Perimeter	Operational
SP9	Gas monitoring probe	Detection	Southern Facility Perimeter	Operational
SP10	Gas monitoring probe	Detection	Southern Facility Perimeter	Operational
SP11	Gas monitoring probe	Detection	Western Facility Perimeter	Operational
SP12	Gas monitoring probe	Detection	Western Facility Perimeter	Operational
SP13	Gas monitoring probe	Detection	Western Facility Perimeter	Operational

Monitoring Point	Device Type	Program	Monitored Unit	Status
SP14	Gas monitoring probe	Detection	Northern Facility Perimeter	Operational
U-3	Suction Lysimeter	Detection	Modules 1,2,3	Operational
U-4B	Suction Lysimeter	Detection	Modules 1,2,3	Operational
U-5	Suction Lysimeter	Background	N/A	Operational
U-11	Suction Lysimeter	Detection	Module 5	Operational
U-12	Pan Lysimeter	Detection	Module 4	Operational

See Glossary for definitions of terms and abbreviations in table.

36. As of the date of this Order, the Facility’s **surface water** monitoring network consists of the existing monitoring point listed in **Table 6**.

**Table 6—Surface Water Monitoring Network**

Monitoring Point	Location	Program	Monitored Unit	Status
SW-1	West of Primary Sedimentation Basin	Detection	Modules 4 and 5	Operational
SW-2	Eastern Perimeter of Facility	Detection	Background	Operational

37. As of the adoption of this Order, the above-described groundwater monitoring network does not meet the monitoring requirements of Title 27. (See Title 27, §§ 20415-20435). The monitoring well network downgradient of Modules 1-3 is inadequate to assess the nature and extent of impacted groundwater observed in monitoring wells MW-3, MW-8B and MW-9. Additionally, Basin No. 2, which has served as an infiltration point, and the area downgradient of the Primary Sedimentation Basin which was impacted by the off-site leachate releases from Module 4 during February and March 2019, do not have downgradient monitoring points. This WDRs Order requires the submittal of a Monitoring Network

Augmentation Work Plan as part of the Time Schedule presented in Requirements N and Table 10. Subsequent changes to these networks will be reflected in a Revised MRP issued by the Executive Officer.

### **Water Quality Protection Standard**

38. A Water Quality Protection Standard (WQPS) is the analytical framework through which WMUs are individually monitored for releases and impacts to water quality. (Title 27, § 20390, subd. (a).) Under Title 27, a WQPS is separately established for each WMU in WDRs. (*Id.*)
39. In accordance with Title 27, this Order, by virtue of its incorporation of **Monitoring & Reporting Program R5-2022-XXXX** and subsequent revisions thereto, establishes a WQPS for each WMU at the Facility.

### **Corrective Action**

40. In 1993, volatile organic compounds (VOCs) were detected in the unsaturated zone and chlorides, nitrates, total dissolved solids (TDS), and specific conductance concentrations were found to be statistically higher at the compliance points than at the background sampling points. The Discharger submitted the November 1995 Corrective Action Plan (CAP) which included the placement of plastic barriers on the top deck, and cement on the side slopes during interim closure to minimize infiltration of rainfall. The Discharger implemented this CAP in 1996.
41. In August 2000, staff directed the Discharger to assess groundwater conditions based on increasing inorganic monitoring parameter concentrations (specific conductance, TDS, chloride, sulfate, and nitrate) and VOCs detections. The results of the assessment indicated that seepage from Modules 1, 2, and 3, as well as the former unlined septage pond (which later became Module 4) were the source of the releases. The Discharger proposed closure of Modules 1, 2 and 3 in a CAP submitted in March 2002. Closure of these units was completed in 2007.
42. Following completion of closure of Modules 1, 2 and 3, organic and inorganic constituent of concern (COC) concentrations have stabilized. Downgradient monitoring wells impacted by the release from Modules 1, 2 and 3 (MW-3, MW-8B and MW-9B) have shown different responses to completion of closure based upon their proximity to the modules. MW-9B, which is the closest to the closed modules, has shown a moderate decrease in bicarbonate, calcium, chloride,

magnesium, potassium, sodium and TDS. MW-3 and MW-8B, which are respectively farther from the closed modules, show a very similar but lesser decrease in these constituents. While decreases were seen as early as 2009 in MW-9B, these decreases were seen in 2013 and 2016 for MW-3 and MW-8B, respectively. At this time, inorganic constituent concentrations remain higher in MW-3, MW-8B and MW-9B than in downgradient wells serving Modules 4 and 5.

Compliance wells downgradient of Modules 1, 2 and 3 continue to show VOC effects that are generally stable. Some VOCs observed at the time of closure of Modules 1, 2 and 3 are no longer detected. Within MW-3, concentrations of 1,4-dichlorobenzene (1,4-DCB) are slowly decreasing and concentrations of 1,1-dichloroethane (1,1-DCA) and perchloroethylene (PCE) are stable at trace levels. Dichlorodifluoromethane and cis-1,2-dichloroethene (c1,2-DCE) have not been detected since 2018. Within MW-8B, concentrations of 1,4-DCB, c1,2-DCE and 1,2-dichlorobenzene (1,2-DCB) have remained stable. Chlorobenzene and dichlorodifluoromethane have not been present since 2017. Finally, within MW-9, no VOC detections have occurred since 2015. The extent of groundwater impacts downgradient of Modules 1, 2 and 3 cannot be determined with the existing monitoring network. This WDRs Order requires submittal of a Monitoring Network Augmentation Work Plan which will address this deficiency.

### **Enforcement**

43. The Facility has on-going enforcement related to off-site leachate releases from Module 4 during February and March 2019. The Discharger allowed unpermitted discharges of leachate that had accumulated in Basin No. 4 into an unlined drainage ditch which flows into the Facility's Primary Sedimentation Basin.
44. In August 2019, the Central Valley Water Board issued a Notice of Violation (NOV) of WDRs Order R5-2011-0049 for failure to notify staff of all incidents of leachate seepage and for the discharge of leachate to a non-Class II surface impoundment. In August 2019, the Central Valley Water Board issued a 13267 Technical Reporting Order directing the Discharger to submit a revised Operations Plan, plans for interim cover improvements and their implementation for Modules 4 and 5, a revised Storm Water Pollution Prevention Plan (SWPPP), and documentation of cover repairs and wet weather preparedness. The Discharger has submitted the required reports.
45. In June 2020, the State Water Resources Control Board (State Water Board) issued a NOV of WDRs Order R5-2011-0049, the Industrial Storm Water General Permit, and Clean Water Act Section 301. In November 2020, the State Water Board issued 13267 Investigative Order WQ 20200036-EXEC requiring the

Discharger to investigate the impacts of unauthorized discharge of leachate to the Primary Sedimentation Basin and offsite tributaries. The investigation results are still pending.

46. In response to the Central Valley Water Board's 13267 Order, the Discharger submitted the 23 September 2019 *Operations Plan for Managing Storm Water and Leachate* and adopted improvements including updated best management practices (BMPs) for the control of storm water, leachate, and erosion, as well as establishing contingency plans for excess leachate production, failure of containment systems, and seepage control.
47. Improvements to the Facility implemented between November 2019 and March 2020 consisted of: placement of rainfly tarp over northern facing slopes of Module 4; application of Posi-Shell® (a spray-on impermeable layer which prevents storm water infiltration and prevents erosion) to western and southern facing slopes of Module 4; enlargement of Basin No. 2 to approximately double its holding capacity; regrading of storm water conveyance ditches to redirect storm water away from the Primary Sedimentation Basin and towards Basin No. 2; the installation of a french drain at the base of the slope of Module 4; and lining of Basin No. 4.
48. In August 2021, the State Water Board issued a NOV of WDRs Order R5-2011-0049 for: discharge of contaminated storm water to Basin #2; and failure to immediately notify Central Valley Water Board staff of conditions that could impair the integrity of facilities and conditions violating prohibitions of WDRs Order R5-2011-0049.
49. This Order is adopted as an update to and/or replacement for the previously-operative WDRs Order R5-2011-0049-01. Although the previously-operative WDRs Order is being rescinded as part of the instant order, this rescission shall have no effect on the Discharger's liability for any violations of WDRs occurring prior to adoption. As noted in the Requirements, WDRs Order R5-2011-0049-01 shall be deemed to remain in place for the purposes of enforcement.

#### **WMU Unit Construction**

50. Liners for **new Class II WMUs** (landfills and surface impoundments) must be designed and constructed to contain fluids (e.g., leachate, waste and landfill gas condensate), to prevent the migration of waste to adjacent geologic materials, groundwater and surface water. (See Title 27, § 20310, subd. (a); §20330, subd. (a).)

51. Liners for **new Class III WMUs** (landfills) must be designed and constructed to contain fluids (e.g., leachate, waste and landfill gas condensate), so as to be capable of preventing degradation of groundwater and surface water, even with inadequate site characteristics. (See Title 27, § 20310, subd. (c); §20330, subd. (a).)
52. The Central Valley Water Board is authorized to approve an **engineered alternative** to Title 27 prescriptive standards (see, e.g., Title 27, § 20330, subd. (c)), provided that the Discharger demonstrates that compliance with the prescriptive standard would be unreasonably and unnecessarily burdensome in comparison to the proposed alternative. (Title 27, § 20080, subds. (b), (c); State Water Board Resolution 93-62).
53. The Discharger submitted an engineered alternative to liner requirements in the 26 November 2001 *Joint Technical Document, Neal Road Landfill, Butte County, California*. The Central Valley Water Board approved this engineered alternative in July 2002. The Discharger implemented this engineered alternative to liner requirements during construction of Module 4 and for Module 5 Phases A and B.
54. The engineered alternative consists of a triple composite liner on the floor and a single composite liner on the side slopes. On the landfill base the containment system consists of the following components, from top to bottom: 12 inches of operations soil, 8-oz. non-woven geotextile filter, 12 inches of LCRS gravel (permeability greater than or equal to 1 cm/sec) with LCRS piping, 60-mil HDPE geomembrane (double-sided textured), geosynthetic clay liner (GCL), 40-mil HDPE geomembrane (double-sided textured), 12 inches of compacted soil, geocomposite leak detection layer, 60-mil HDPE geomembrane (double-sided textured), GCL, and native subgrade (sandstone and lahar).
55. On 31 July 2019, the Discharger submitted an Amended ROWD requesting approval for a different engineered alternative to liner requirements for construction of future modules. The Central Valley Water Board approved the engineered alternative in the amendment of WDR Order R5-2011-0049 on 30 April 2020. This engineered alternative to liner requirements was implemented in construction of Module 5 Phase C in 2020 and will also be used for future landfill module construction.

The engineered alternative consists of a triple composite liner on the floor and a single composite liner on the side slopes. On the landfill base the containment system consists of the following components, from top to bottom: 12 inches of operations soil, 8-oz. non-woven geotextile filter, 12 inches of LCRS gravel

(permeability greater than or equal to 1 cm/sec) with LCRS piping, 60-mil HDPE geomembrane (double-sided textured), GCL, 40-mil HDPE geomembrane (double-sided textured), 12-inches of compacted soil, geocomposite leak detection layer, 60-mil HDPE geomembrane (double-sided textured), GCL, and native subgrade (sandstone and lahar).

56. The Discharger has adequately demonstrated that construction of a liner in accordance with the Title 27 prescriptive standard would be unreasonably and unnecessarily burdensome in comparison to the previously approved engineered alternatives. The Discharger has further demonstrated that the proposed engineered alternatives, as described in the ROWD, are not only consistent with the performance goals of the prescriptive standard, as described above, and will afford at least equivalent water quality protections.
57. New WMUs will incorporate the LCRS as described in the 31 July 2019 Amended ROWD. The proposed LCRS complies with Title 27 prescriptive standards. (See Title 27, § 20340.)
58. The unsaturated zone monitoring system for future modules shall be implemented in accordance with the operative MRP.
59. According to the submitted seismic analysis, future WMUs will be able to withstand MPE seismic events described in **Finding 29**. (Title 27, § 20370.)

#### **WMU Closures**

60. Closure of Modules 1, 2, and 3 with a low-permeability cap was completed in March of 2007 and documented in the 2005 (Phase 1) and 2007 (Phase 2) *Final Partial Closure of Modules 1, 2 & 3, Construction Quality Assurance Report, Neal Road Landfill, Neal Road, Butte County, California*.
61. On 15 October 2020, the Discharger submitted a Preliminary Closure and Post-Closure Maintenance Plan (Preliminary CPMP) as Section 10 of the ROWD, which indicates that the Facility's active WMUs are scheduled to be closed on the dates specified in **Table 7**. The Facility's WMUs have a remaining capacity of 16,659,264 cubic yards.



**Table 7—Unit Closure Schedule<sup>1</sup>**

Unit Module	Estimated Closure Date
Module 4	2051
Module 5	2051

- 62. Per the Preliminary CPMP, the Discharger proposes simultaneous closure of Modules 4 and 5 with an engineered alternative final cover called ClosureTurf®, which consists of a two-foot thick foundation layer, a low-hydraulic-conductivity layer consisting of a 60 mil thick geomembrane with studs that provide a 0.13 inch thick drainage layer, and a one-half inch thick synthetic turf and geotextile layer functioning as the erosion resistant layer.
- 63. The Discharger has adequately demonstrated that construction of a final cover in accordance with the Title 27 prescriptive standard would be unreasonably and unnecessarily burdensome in comparison to the proposed engineered alternative, as no local sources of adequate low-hydraulic-conductivity soils are available. The Discharger has further demonstrated via Hydrologic Evaluation of Landfill Performance (HELP) modeling that the proposed engineered alternative described in the Preliminary CPMP is approximately 180 times more resistant to percolation than of the prescriptive standard, as described above, and will afford at least equivalent water quality protections.
- 64. Side slopes for the closed WMUs will be sloped at a maximum of 2H:1V, and the final cover will include a 15-foot wide bench at minimum for every 50 feet of vertical gain. (See Title 27, § 21090, subd. (a).), and is supported by a static and dynamic slope stability analysis demonstrating that side slopes will remain stable, both under static and dynamic conditions, throughout the life of the unit. (See Title 27, § 21750, subd. (f)(5).)
- 65. The Discharger's proposed final cover, together with any modifications set forth in the Preliminary PCMP, are hereby approved for closure of the WMUs identified in **Finding 56**.

---

<sup>1</sup> Closure dates are estimates, which may be affected by several factors (e.g., fluctuating waste receipts).

**Post-Closure Maintenance & Financial Assurances**

- 66. The Discharger's Preliminary CPMP dated 15 October 2020 is the operative document, providing for post-closure maintenance of the Facility for the entire post-closure maintenance period of at least 30 years, and until it is demonstrated that the Facility no longer poses a threat to the public health and safety and the environment. (See Title 27, § 20950, subd. (a)(1); §21180, subd. (a).)
- 67. The Preliminary CPMP includes cost estimates for closure (Title 27, §§ 21820, 22206), post-closure maintenance (Title 27, §§ 22210–22212), and foreseeable corrective action for releases (Title 27, §§ 22220–22222). As of the date of this Order, these estimates, calculated in accordance with Title 27, are specified in **Table 8**.

**Table 8—Current Cost Estimates (Financial Assurances)**

Requirement	Estimated Cost
Closure	\$ 18,698,823
Post-Closure Maintenance	\$ 8,233,264
Corrective Action	\$ 1,970,537

- 68. This Order requires the Discharger to maintain financial assurances with CalRecycle in at least the Estimated Cost amounts specified in **Table 8**, in accordance with Title 27. The financial assurance mechanism for closure and corrective action is an enterprise fund. The financial assurance mechanism for post-closure maintenance is through a pledge of revenue.
- 69. Closed Modules 1, 2 and 3 shall be subject to post-closure maintenance as described within the Preliminary CPMP. Inspection and maintenance will include condition of the final cover, drainage features, groundwater monitoring wells, unsaturated monitoring points and access roads. Repair work may include sealing cracks in the final cover caused by desiccation or settlement, repairing erosion damage resulting from heavy precipitation, and immediately reporting to Central Valley Water Board following discovery of damage to closed Modules. Maintenance and repairs shall be documented in the Annual Facility Monitoring Report described within the **MRP R5-2022-XXXX**.

### **California Environmental Quality Act**

70. The Central Valley Water Board was consulted with in the development of the Environmental Impact Report (EIR) and the discharges and other activities authorized under this Order fall within the scope of the project as contemplated in the 12 February 2002 EIR (SCH# 2001062067) and the 28 September 2010 Mitigated Negative Declaration, both certified by the Butte County Board of Supervisors. Additionally, there are no substantial changes to either the proposed project or the attendant circumstances under which it will be undertaken, and no new information requiring revision of the EIR. The EIR is therefore conclusively presumed compliant with CEQA for use by the Central Valley Water Board as a “responsible agency” under CEQA. Accordingly, no further environmental review is required under CEQA. (See Cal. Code Regs., tit. 14, § 15162.)

### **Other Regulatory Matters**

71. This Order is issued in part pursuant to Water Code section 13263, subdivision (a), which provides as follows:

The regional board, after any necessary hearing, shall prescribe requirements as to the nature of any proposed discharge, existing discharge, or material change in an existing discharge..., with relation to the conditions existing in the disposal area ... into which, the discharge is made or proposed. The requirements shall implement any relevant water quality control plans that have been adopted, and shall take into consideration the beneficial uses to be protected, the water quality objectives reasonably required for that purpose, other waste discharges, the need to prevent nuisance, and the provisions of [Water Code] Section 13241.

72. This Order implements the Central Valley Water Board’s Basin Plan, which designates beneficial uses for surface water and groundwater and establishes water quality objectives (WQOs) necessary to preserve such beneficial uses.<sup>2</sup> (Wat. Code, § 13241 et seq.)

---

<sup>2</sup> Designated beneficial uses for surface water and groundwater are discussed in Finding 26 and Finding 27, respectively.

73. The State Water Board's *Statement of Policy with Respect to Maintaining High Quality Waters in California*, Resolution 68-16 (*Antidegradation Policy*) prohibits the Central Valley Water Board from authorizing degradation of "high quality waters" unless it is shown that such degradation: (1) will be consistent with the maximum benefit to the people of California; (2) will not unreasonably affect beneficial uses, or otherwise result in water quality less than as prescribed in applicable policies; and (3) is minimized through the Discharger's best practicable treatment or control.
74. Consistent with Title 27, this Order requires the Discharger to maintain the Facility to contain waste within the WMUs, thereby preventing degradation of water quality. To the extent that there are releases from the Facility's WMUs, the Discharger will be required to address such releases through a Corrective Action Program. (See Title 27, §§ 20385, 20415, 20430.) Because this Order does not authorize any degradation in water quality, it complies with the *Antidegradation Policy*.
75. For the purposes of California Code of Regulations, title 23 (Title 23), section 2200, the Facility has a threat-complexity rating of **2-B**, where:
- a. Threat Category "2" reflects waste discharges that can impair receiving water beneficial uses, cause short-term water quality objective violations, cause secondary drinking water standard violations, and cause nuisances; and
  - b. Complexity Category "B" reflects any discharger not included in Category A, with either (1) physical, chemical or biological treatment systems (except for septic systems with subsurface disposal), or (2) any Class II or Class III WMUs.

### Reporting Requirements

76. This Order is also issued in part pursuant to Water Code section 13267, subdivision (b)(1), which provides that:
- [T]he regional board may require that any person who has discharged, discharges, or is suspected of having discharged or discharging, or who proposes to discharge waste within its region ... shall furnish, under penalty of perjury, technical or monitoring program reports which the regional board requires. The burden, including costs, of these reports shall bear a reasonable relationship to the need for the report and the benefits to be

obtained from the reports. In requiring those reports, the regional board shall provide the person with a written explanation with regard to the need for the reports, and shall identify the evidence that supports requiring that person to provide the reports.

77. The technical reports required under this Order, as well as those required under the separately issued MRP, are necessary to ensure compliance with prescribed WDRs and the provisions of Title 27, Subtitle D (40 C.F.R. part 258) and State Water Board Resolution 93-62. Additionally, the burdens associated with such reports are reasonable relative to the need for their submission.
78. Failure to comply with the reporting requirements under this Order and the MRP may result in enforcement action pursuant to Water Code section 13268.

#### **Procedural Matters**

79. All local agencies with regulatory jurisdiction over land-use, solid waste disposal, air pollution and public health protection have approved the use of the Facility's site for the discharge of waste to land as provided for herein.
80. The Discharger, interested agencies and interested persons were notified of the Central Valley Water Board's intent to prescribe the WDRs in this Order, and provided an opportunity to submit their written views and recommendations at a public hearing. (Wat. Code, § 13167.5; Title 27, § 21730.)
81. At a public meeting, the Central Valley Water Board heard and considered all comments pertaining to the discharges regulated under this Order.
82. The Central Valley Water Board will review and revise the WDRs in this Order as necessary.

## REQUIREMENTS

**IT IS HEREBY ORDERED**, pursuant to Water Code sections 13263 and 13267, that WDRs Order R5-2011-0049-01 is rescinded (except for enforcement purposes), and that the Discharger shall comply with the following.

### A. WMU Discharge Prohibitions

Except as otherwise expressly directed below, the Discharger shall comply with all Standard Prohibitions (SPRRs, § C), which are incorporated herein, as well as the following.

1. **“Hazardous Waste,”** as defined per Title 23, section 2601, shall not be discharged at the Facility. The Department of Toxic Substances Control (DTSC) shall be immediately notified of any such discharges in violation of this Order.
2. As specified in **Section 0** and **Table 9**, **“Designated Waste,”** as defined per Water Code section 13173, shall not be discharged at the Facility.
3. Except as expressly authorized in **Section B.1** and **Table 9**, leachate and LFG condensate shall not be discharged into Facility’s WMUs.

### B. WMU Discharge Specifications

Except as otherwise expressly directed below, the Discharger shall comply with all Standard Discharge Specifications (SPRRs, § D), which are incorporated herein, as well as the following.

1. The Discharger shall only discharge waste to the Facility’s WMUs as specified in **Table 9**, subject to the table-specific definitions provided below.

**Table 9—Authorized Waste Discharges at Facility**

<b>Waste Category</b>	<b>Modules 1, 2 and 3</b>	<b>Modules 4 and 5</b>	<b>Leachate Impoundment</b>
<p><b>Hazardous Waste</b>                      Wastes which, pursuant to Title 22, section 66261.3 et seq., must be managed in accordance with Division 4.5 of Title 22. (Title 27, § 20164; Title 23, § 2521(a).)</p>	No	No	No
<p><b>Municipal Solid Waste (MSW)</b>                      Wastes subject to 40 C.F.R. part 258. (Title 27, § 20164.)</p>	No	Yes	No
<p><b>Designated Waste</b>                      (1) Hazardous Wastes subject to a variance from management requirements per Health and Safety Code section 25143; and (2) Nonhazardous Waste containing constituents that, under ambient conditions, could be released in concentrations exceeding WQOs, or could reasonably be expected to affect beneficial uses. (Wat. Code, § 13173.)</p>	No	No	No

Waste Category	Modules 1, 2 and 3	Modules 4 and 5	Leachate Impoundment
<p><b>Inert Wastes</b>                      Wastes that contain neither (i) hazardous wastes or soluble pollutants at concentrations in excess of WQOs, nor (ii) significant quantities of decomposable material.                      (Title 27, § 20164; §20230, subd. (a).)</p>	No	Yes	No
<p><b>Landfill Gas Condensate</b>                      Liquid removed from a gas control system at a landfill and which are produced by the condensation of LFG being conveyed by that system. (Title 27, § 20164.)</p>	No	Yes	Yes
<p><b>Leachate Extracted from Modules 2, 4, and 5</b>                      Liquid formed by the drainage of liquids from waste or by the percolation or flow of liquid through waste. Includes any constituents extracted from the waste and dissolved or suspended in the fluid. (Title 27, § 20164.)</p>	No	Yes	Yes



Waste Category	Modules 1, 2 and 3	Modules 4 and 5	Leachate Impoundment
<p><b>Asbestos-Containing Waste (&gt;1%)</b>                      Wastes containing at least 1 percent of asbestos particles.</p>	No	Yes, Upon approval of Asbestos Containing Waste Program	No
<p><b>Treated Wood Waste</b>                      Wood treated with chemical preservatives that are: (i) administered for protection against insects, microorganisms, fungi, and other conditions leading to decay; and (ii) registered under the Federal Insecticide, Fungicide and Rodenticide Act. (Title 22, § 66260.210.)</p>	No	Yes	No
<p><b>Green Waste</b>                      Wastes subject to 40 C.F.R. part 258. (Title 27, § 20690.)</p>	No	Yes	No
<p><b>Food Waste</b>                      Wastes subject to 40 C.F.R. part 258. (Title 27, § 20690.)</p>	No	Yes	No

2. The Discharger shall promptly remove and relocate all waste discharged at the Facility in violation of this Order. If unable to do so, the Discharger shall submit a report to the Central Valley Water Board: explaining how the violative discharge(s) occurred; explaining why the waste(s) cannot be feasibly removed; and proposing waste acceptance program updates to prevent reoccurrences. If the infeasibility is economic, cost estimates shall be provided as part of the report.
3. Treated Wood Waste shall only be discharged to landfill WMUs specified above in **Section B.1** and **Table 9**. The Discharger shall manage such waste in accordance with Health & Safety Code sections 25143.1.5 and 250150.7, and otherwise comply with Title 22, section 66260.210. In the event of a verified release from an authorized WMU containing treated wood waste, the Discharger shall suspend all discharges of treated wood waste until corrective action is terminated.
4. For the active WMUs, the Discharger shall only use the materials described in **Finding 16** as an ADC for the WMUs, provided that other materials may be used if approved in writing by the Central Valley Water Board as meeting the standards of Title 27, section 20705.
5. The Discharger shall not apply ADC materials to areas with drainage beyond contiguous landfill WMUs unless:
  - a. The Discharger demonstrates that resulting runoff will not pose a threat to surface water quality (accounting for sediment and suspended solids removal in a sedimentation basin); and
  - b. The Central Valley Water Board approves the demonstration in writing.
6. Notwithstanding **Section B.1** and **Table 9, Landfill Gas Condensate** and **Leachate** from landfill WMUs shall not be discharged unless approved in writing by the Central Valley Water Board. (See Title 27, § 20340.)
7. Leachate from Modules 2, 4 and 5 may be dispersed for the purposes of dust control on lined WMUs between 1 April and 1 October with the following conditions:
  - a. Leachate may not be dispersed within 48 hours of a forecasted rain event, during any rain event, or less than 48 hours after a rain event. A forecasted rain event would be any day for which the National Weather Service has predicted a greater than 50% or more chance of rainfall at the nearest weather station.

- b. If saturation of surface soils creates a condition in which dispersed leachate forms surface runoff rather than infiltrating the lined WMU's soil, leachate may not be dispersed for dust control.

**C. Facility Specifications**

The Discharger shall comply with all Standard Facility Specifications (SPRRs, § E) which are incorporated herein.

**D. WMU Construction Specifications**

Except as otherwise expressly directed below, the Discharger shall comply with all Standard Construction Specifications and Standard Storm Water Provisions (SPRRs, §§ D, L), which are incorporated herein, as well as the following.

1. Except as authorized in **Section D.2**, the Discharger shall not commence liner construction (other than preparatory earthmoving and grading) until the Central Valley Water Board has approved in writing all necessary construction plans, specifications and construction quality assurance (CQA) plans related to the new liner(s).
2. Base liners and slope liners for new WMUs listed in **Finding 50** and **Section B.1** shall be constructed according to specifications in the 31 July 2019 Amended ROWD.
3. The Discharger shall not implement changes to approved liner designs in the 31 July 2019 Amended ROWD until the Central Valley Water Board approves of the proposed changes in writing, provided that the proposed changes:
  - a. Previously approved components are not eliminated;
  - b. The engineering properties of previously approved components are not substantially reduced; and
  - c. The proposed liner system will result in water quality equal to or greater than the design(s) prescribed per Title 27, section 20310 et seq., and this Order.

#### **E. WMU Closure & Post-Closure Maintenance Specifications**

Except as otherwise directed below, the Discharger shall comply with all Standard Closure and Post-Closure Specifications (SPRRs, § G) and closure-related Standard Construction Specifications (SPRRs, § F), as well as the following with respect to closure of WMUs at the Facility.

1. The Discharger shall submit a Final or Partial Final Closure and Post Closure Maintenance Plan (Final or Partial Final CPMP), in accordance with section G of the SPRRs, at least two years prior to the proposed closure of any WMUs.
2. The Discharger shall close the WMUs with the final cover components proposed in the operative Preliminary CPMP, as approved per **Finding 57**.
3. The Discharger shall obtain revised WDRs prior to closure of WMUs with a final cover other than the one(s) approved herein.
4. During or after final cover installation, the Discharger may perform minor modifications to problematic areas of the final cover, provided that: (a) the barrier layer of the final cover (e.g., geomembrane, GCL and/or compacted clay layer) remains intact; and (b) the Central Valley Water Board approves of such modifications.
5. If the final cover incorporates a geomembrane barrier, all edges of the final cover shall be sealed by connecting to the liner.
6. Critical interfaces of the final cover shall be laboratory-tested to ensure minimum design shear strength. The results of such testing shall be reported to the Central Valley Water Board as part of the CQA Report.

#### **F. Financial Assurances**

Except as otherwise directed below, the Discharger shall comply with all Standard Financial Assurance Provisions (SPRRs, § H), as well as the following.

1. The Discharger shall maintain with CalRecycle assurances of financial responsibility for the amounts specified for each category in **Finding 62**, adjusted annually for inflation.
2. A report regarding financial assurances, or a copy of the financial assurances report submitted to CalRecycle, shall be submitted to the Central Valley Water Board annually, no later than **1 October**.

3. If CalRecycle determines that the submitted financial assurances for the Facility are inadequate, the Discharger shall, within 90 days of such determination:
  - a. Obtain a new financial assurance mechanism for the amount specified by CalRecycle; and
  - b. Submit a report documenting such financial assurances to CalRecycle and the Central Valley Water Board.
4. The operative Preliminary CPMP shall include all components required per Title 27, section 21769, subdivision (c), and include a lump sum cost estimate for:
  - a. Completion of all actions required for closure of the WMUs;
  - b. Preparation of detailed design specifications;
  - c. Development of a Final CPMP; and
  - d. Undertaking at least 30 years of post-closure maintenance.
5. Whenever changed conditions increase the estimated costs of closure and post-closure maintenance, the Discharger shall promptly submit an updated CPMP to the Central Valley Water Board, CalRecycle and the LEA.

**G. Monitoring Requirements**

Except as otherwise directed below, the Discharger shall comply with all applicable Standard Monitoring Specifications (SPRRs, § I) and Standard Response to Release Specifications (SPRRs, § J), as well as the following:

1. The Discharger shall comply with all provisions of the separately issued Monitoring and Reporting Program R5-2022-XXXX and any subsequent revisions thereto (operative MRP).
2. The Discharger shall implement the WQPS set forth in the operative MRP (see also Title 27, § 20390); and shall verify the compliance of the WMU with each subsequent monitoring event.
3. For the WMUs, the Discharger shall implement a groundwater, surface water and unsaturated zone detection monitoring program (DMP) in accordance with Title 27, sections 20385, 20415 and 20420.

4. If the WMUs are subject to corrective action, the Discharger shall implement a corrective action monitoring program (CAMP) in accordance with Title 27, sections 20385, 20415 and 20430, and Section I of the SPRRs.

## H. Reporting Requirements

In addition to those Standard Provisions pertaining to notification and reporting obligations (see, e.g., §§ K.1-2, K.6, K.8-10), the Discharger shall comply with the following provisions.

1. The Discharger shall comply with all MRP provisions pertaining to the submittal and formatting of reports and data.
2. Reports shall be submitted electronically via the State Water Board's [GeoTracker Database](https://geotracker.waterboards.ca.gov) (<https://geotracker.waterboards.ca.gov>). After uploading, the Discharger shall notify Central Valley Water Board staff via email at [CentralValleyRedding@WaterBoards.ca.gov](mailto:CentralValleyRedding@WaterBoards.ca.gov). The following information shall be included in the body of the email:

<b>Attention:</b>	WDR Unit
<b>Report Title:</b>	[Title]
<b>GeoTracker Upload ID:</b>	[number]
<b>Facility:</b>	Neal Road Class III Municipal Solid Waste Landfill
<b>County:</b>	Butte County
<b>CIWQS Place ID:</b>	244045

3. All technical reports submitted under this Order shall be prepared by, or under the direct supervision of, a California-licensed civil engineer or geologist. For the purposes of this section, a “technical report” is a report incorporating the application of scientific or engineering principles.

**I. Time Schedule**

The Discharger shall complete the following tasks in accordance with the specified deadlines:

**Table 10—Time Schedule**

Item No.	Category	Task	Deadline
1.	Financial Assurances	Task 1: Submit an annual review of Financial Assurances for implementing and completing Facility closure.  Task 2: Submit an annual review of Financial Assurances for post-closure maintenance.  Task 3: Submit an annual review of Financial Assurances for initiating and completing corrective action.	1 October Annually
2.	New WMU Construction	Submit a CQA Plan	Two weeks prior to starting construction
3.	New WMU Construction	Submit a CQA Report	30 days after construction completion

Item No.	Category	Task	Deadline
4.	Facility Monitoring	Submit a Monitoring Network Augmentation Work Plan to address inadequate groundwater monitoring points downgradient of Modules 1-3, downgradient of Sedimentation Basin No. 2 and downgradient of the Primary Sedimentation Basin. The Work Plan shall include an updated hydrogeologic conceptual model including possible transient shallow perched water, analysis of the existing well network, justification for proposed wells (number, location, spacing), well design, well installation procedures, and a proposed implementation schedule.	30 June 2022
5.	Asbestos Containing Waste Program	Submit a plan documenting the Asbestos Containing Waste Program	At least 120 days prior to planned implementation
6.	Leachate Disposal Plan	Submit a plan proposing alternative leachate disposal methods, or to increase leachate storage capacity.	1 August 2022
7.	Final Closure	Submit final or partial final closure and post-closure maintenance plan, design plans, and CQA plan for review and approval, in accordance with Section E of this Order and Section G of the SPRRs.	2 Years Prior to Closure



**J. Other Provisions**

1. The Discharger shall maintain at the Facility copies of this Order (including all attachments), the operative MRP (i.e., MRP R5-2022- and any revisions thereto), and the SPRRs. These materials shall be made available to all operating personnel, who shall be familiar with the contents of such materials.
2. The Discharger shall comply with all applicable provisions of Title 27 (including those provisions not specifically referenced herein).

**LIST OF ATTACHMENTS**

Attachment A—Site Location Map  
Attachment B—Facility Features Map

Standard Provisions and Reporting Requirements for Non-Hazardous Discharges of Waste Regulated under Subtitle D and/or Title 27, December 2015 Edition (SPRRs or Standard Provisions)

Information Sheet

Monitoring and Reporting Program R5-2022-XXXX (separate document)


### **ENFORCEMENT**

If, in the opinion of the Executive Officer, the Discharger fails to comply with the provisions of this Order, the Executive Officer may refer this matter to the Attorney General for judicial enforcement, may issue a complaint for administrative civil liability, or may take other enforcement actions. Failure to comply with this Order may result in the assessment of Administrative Civil Liability of up to \$10,000 per violation, per day, depending on the violation, pursuant to the Water Code, including sections 13268, 13350 and 13385. The Central Valley Water Board reserves its right to take any enforcement actions authorized by law.


### **ADMINISTRATIVE REVIEW**

Any person aggrieved by this Central Valley Water Board action may petition the State Water Board for review in accordance with Water Code section 13320 and California Code of Regulations, title 23, section 2050 et seq. To be timely, the petition must be received by the State Water Board by 5:00 pm on the 30th day after the date of this Order; if the 30th day falls on a Saturday, Sunday or state holiday, the petition must be received by the State Water Board by 5:00 pm on the next business day. The law and regulations applicable to filing petitions are available on the [State Water Board website](http://www.waterboards.ca.gov/public_notices/petitions/water_quality) ([http://www.waterboards.ca.gov/public\\_notices/petitions/water\\_quality](http://www.waterboards.ca.gov/public_notices/petitions/water_quality)). Copies will also be provided upon request.

**ATTACHMENT A—SITE LOCATION MAP**

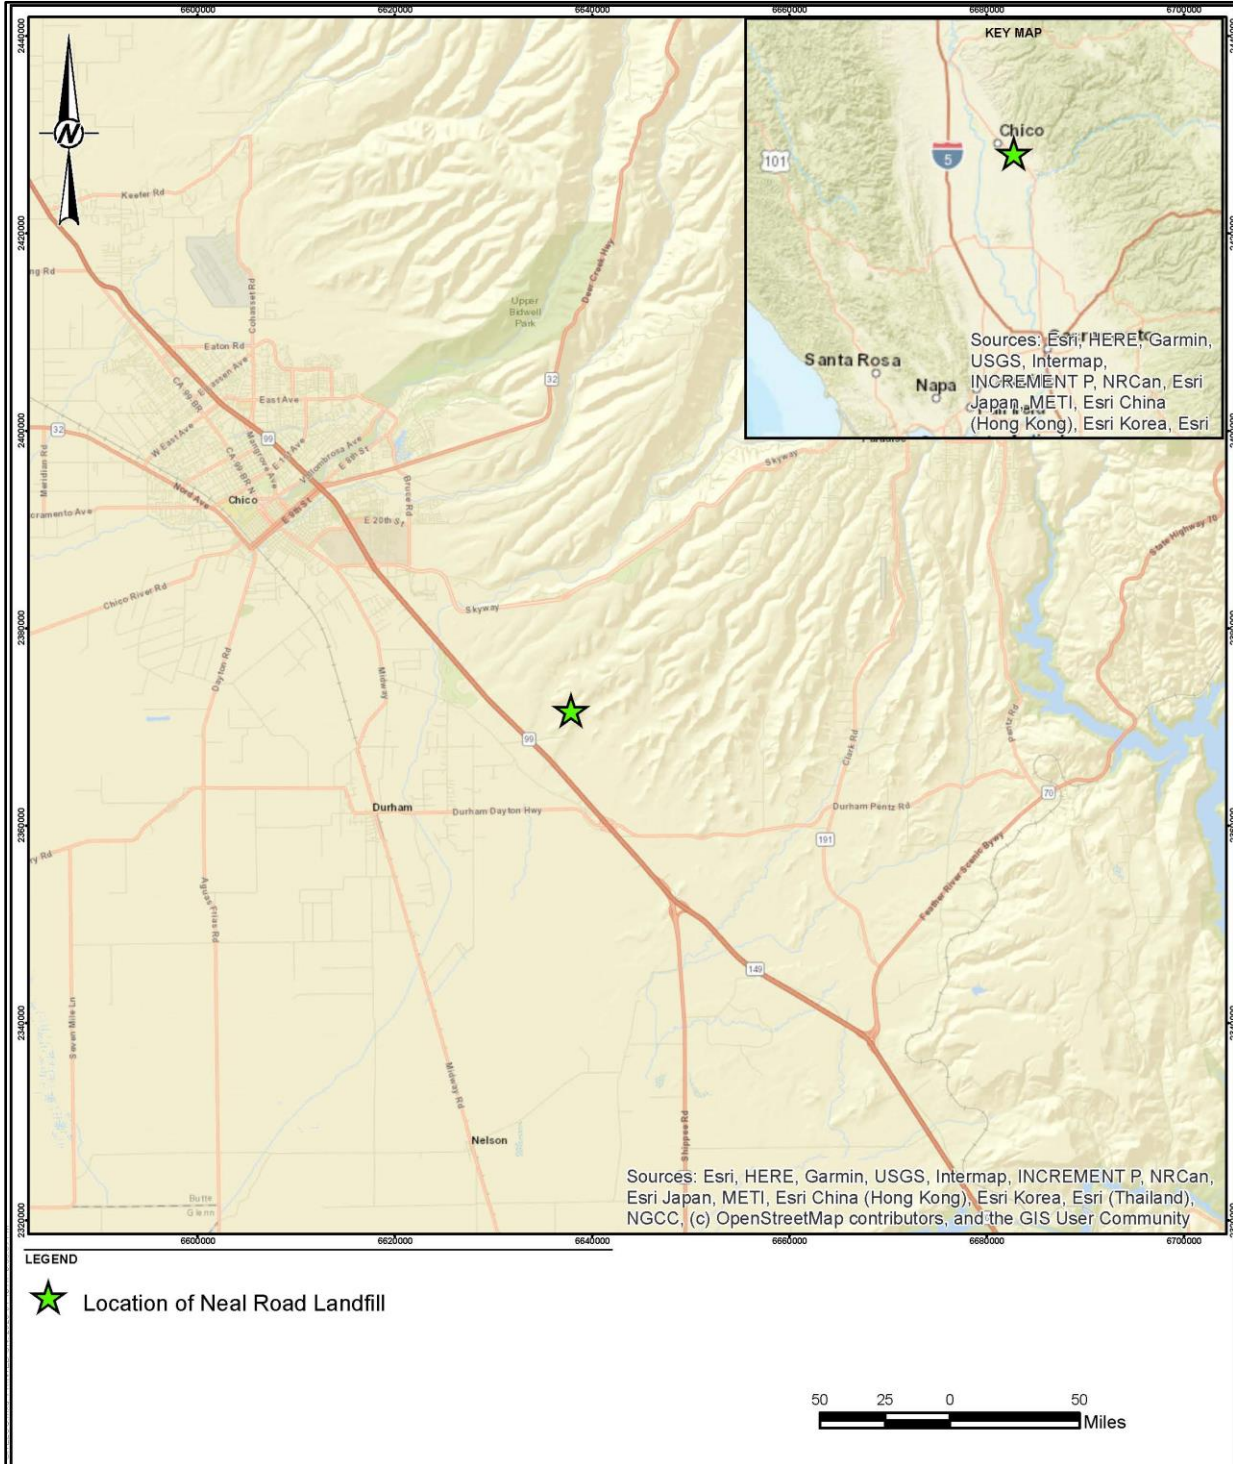

**ATTACHMENT B—FACILITY FEATURES MAP**

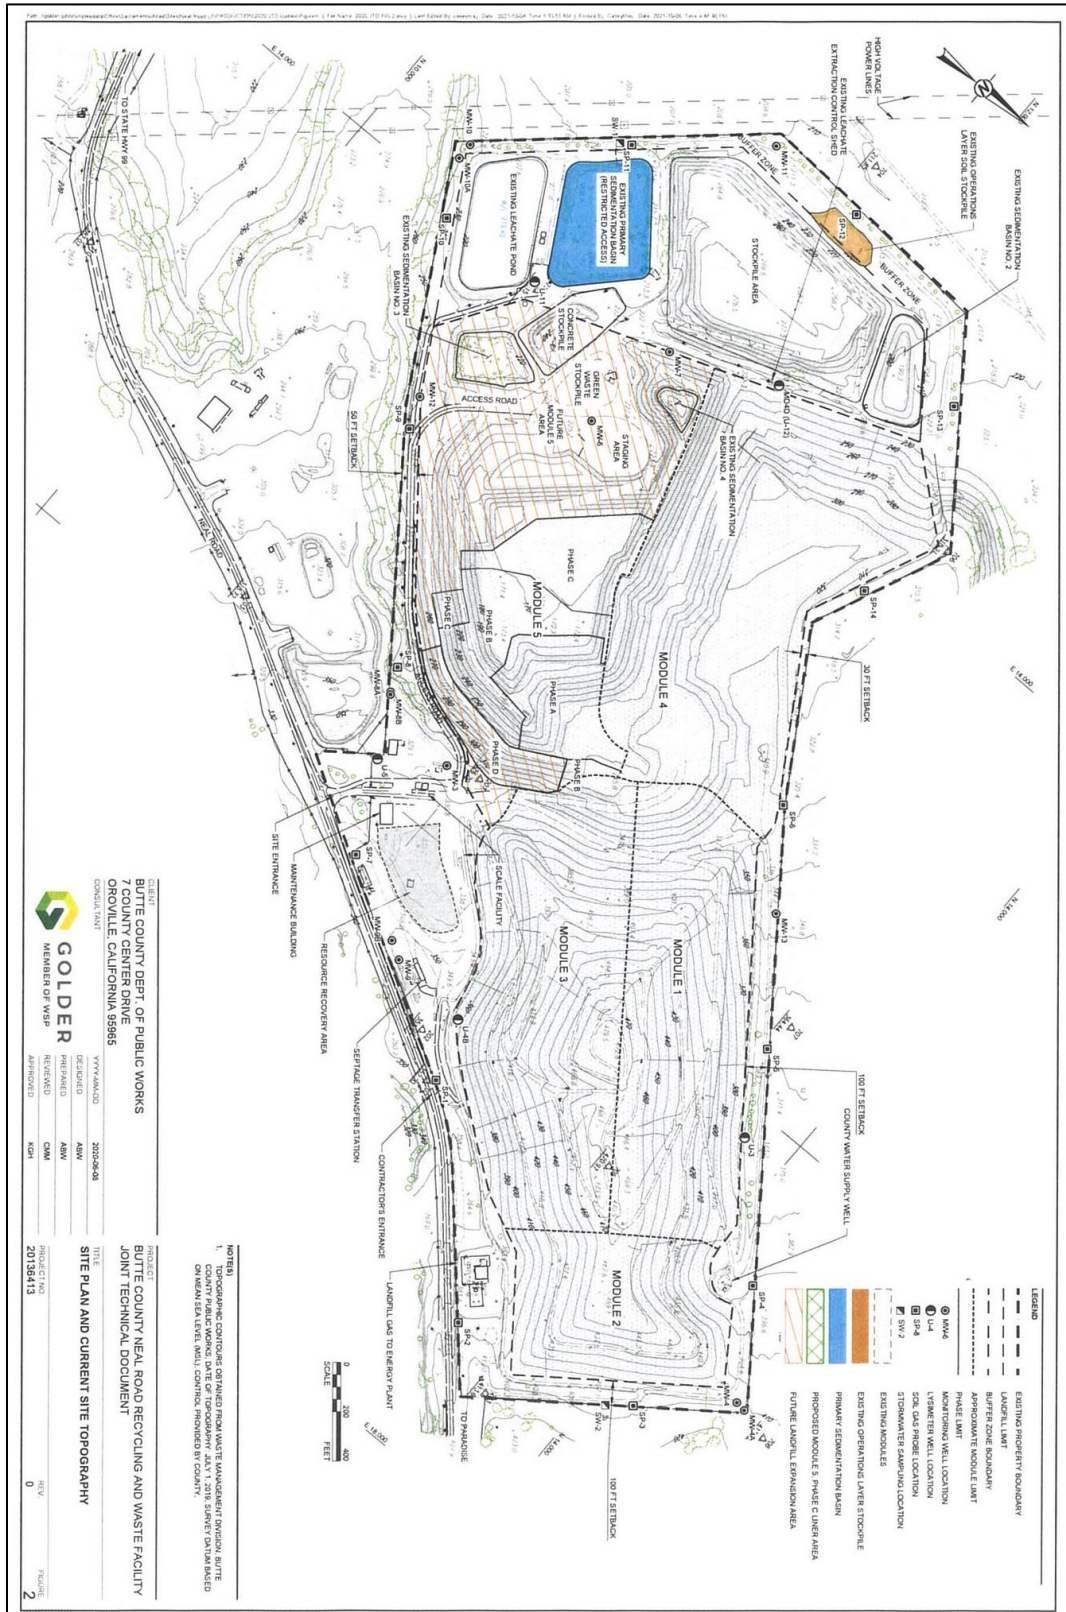



## **STANDARD PROVISIONS & REPORTING REQUIREMENTS**

### **Non-Hazardous Discharges of Waste Regulated under Subtitle D and/or Title 27, December 2015 Edition**

#### **A. Applicability**

1. These Standard Provisions and Reporting Requirements (SPRRs) are applicable to nonhazardous solid waste disposal sites that are regulated by the Central Valley Regional Water Quality Control Board (hereafter, Central Valley Water Board) pursuant to the provisions of California Code of Regulations, Title 27 ("Title 27"), section 20005 et seq., and municipal solid waste (MSW) landfills that are subject to the Federal Subtitle D regulations contained in 40 Code of Federal Regulations section 258 (hereafter, "Subtitle D" or "40 C.F.R. § 258.XX") in accordance with State Water Resources Control Board (State Water Board) Resolution 93-62. The Subtitle D regulations are only applicable to MSW landfills and therefore any requirements in these SPRRs that are referenced as coming from Subtitle D are not applicable to non-MSW waste management units such as Class II surface impoundments, Class II waste piles, and non-MSW landfill units. All Subtitle D requirements in these SPRRs are referenced with "[40 C.F.R. § 258.XX]" after the requirement.
2. "Order," as used throughout this document, means the Waste Discharge Requirements (WDRs) to which these SPRRs are incorporated.
3. The requirements prescribed herein do not authorize the commission of any act causing injury to the property of another, and do not protect the Discharger from liabilities under federal, state, or local laws. This Order does not convey any property rights or exclusive privileges.
4. The provisions of this Order are severable. If any provision of this Order is held invalid, the remainder of this Order shall not be affected.
5. If there is any conflicting or contradictory language between the WDRs, the Monitoring and Reporting Program (MRP), or the SPRRs, then language in the WDRs shall govern over either the MRP or the SPRRs, and language in the MRP shall govern over the SPRRs.
6. If there is a site-specific need to change a requirement in these SPRRs for a particular landfill facility, the altered requirement shall be placed in the appropriate section of the WDRs and will supersede the corresponding SPRRs requirement. These SPRRs are standard and cannot be changed

as part of the permit writing process or in response to comments, but they will be periodically updated on an as-needed basis.

7. Unless otherwise stated, all terms are as defined in Water Code section 13050 and in Title 27, section 20164.

**B. Terms and Conditions**

1. Failure to comply with any waste discharge requirement, monitoring and reporting requirement, or Standard Provisions and Reporting Requirement, or other order or prohibition issued, reissued, or amended by the Central Valley Water Board or the State Water Board, or intentionally or negligently discharging waste, or causing or permitting waste to be deposited where it is discharged into the waters of the state and creates a condition of pollution or nuisance, is a violation of this Order and the Water Code, which can result in the imposition of civil monetary liability [Wat. Code, § 13350(a)]
2. After notice and opportunity for a hearing, this Order may be terminated or modified for cause, including, but not limited to [Wat. Code, § 13381]:
  - a. Violation of any term or condition contained in this Order;
  - b. Obtaining this Order by misrepresentation, or failure to disclose fully all relevant facts;
  - c. A change in any condition that results in either a temporary or permanent need to reduce or eliminate the authorized discharge; or
  - d. A material change in the character, location, or volume of discharge.
3. Before initiating a new discharge or making a material change in the character, location, or volume of an existing discharge, the Discharger shall file a new report of waste discharge (ROWD), or other appropriate joint technical document (JTD), with the Central Valley Water Board [Wat. Code, § 13260(c) and § 13264(a)]. A material change includes, but is not limited to, the following:
  - a. An increase in area or depth to be used for solid waste disposal beyond that specified in waste discharge requirements;

- b. A significant change in disposal method, location, or volume (e.g., change from land disposal to land treatment).
  - c. A change in the type of waste being accepted for disposal; or
  - d. A change to previously-approved liner systems or final cover systems that would eliminate components or reduce the engineering properties of components.
- 4. Representatives of the Central Valley Water Board may inspect the facilities to ascertain compliance with the waste discharge requirements. The inspection shall be made with the consent of the owner or possessor of the facilities or, if the consent is refused, with a duly issued warrant. However, in the event of an emergency affecting the public health or safety, an inspection may be made without consent or the issuance of a warrant [Wat. Code, §13267(c)].
- 5. The Central Valley Water Board will review this Order periodically and will revise these waste discharge requirements when necessary [Wat. Code, § 13263(e) and Title 27, § 21720(b)].
- 6. Except for material determined to be confidential in accordance with California law and regulations, all reports prepared in accordance with terms of this Order shall be available for public inspection at the offices of the Central Valley Water Board [Wat. Code, § 13267(b)]. Data on waste discharges, water quality, geology, and hydrogeology shall not be considered confidential.
- 7. A discharge of waste into the waters of the state is a privilege, not a right. No discharge of waste into waters of the state, whether or not the discharge is made pursuant to waste discharge requirements, shall create a vested right to continue the discharge [Wat. Code, § 13263(g)].
- 8. Technical and monitoring reports specified in this Order are requested pursuant to the Water Code [§13267(b)]. Failure to furnish the reports by the specified deadlines or falsifying information in the reports, are misdemeanors that may be liable civilly in accordance with §13268(b) of the Water Code [Wat. Code, §13268(a)].

**C. Standard Prohibitions**

1. The discharge of liquid or semi-solid waste (waste containing less than 50 percent solids) is prohibited, except for the following when proposed in the ROWD/JTD and approved by this Order:
  - a. Dewatered sewage or water treatment sludge as described in Title 27, section 20220(c) provided it is discharged above a composite liner with a leachate collection and removal system (LCRS) [Title 27, § 20200(d)(3)].
  - b. Leachate and/or landfill gas condensate that is returned to the composite-lined waste management unit (with an LCRS) from which it came [Title 27, § 20340(g) and 40 C.F.R. § 258.28].
2. The discharge of wastes which have the potential to reduce or impair the integrity of containment structures or which, if commingled with other wastes in the waste management unit, could produce violent reaction, heat or pressure, fire or explosion, toxic by-products, or reaction products, which, in turn:
  - a. require a higher level of containment than provided by the unit; or
  - b. are 'restricted wastes'; or
  - c. impair the integrity of containment structures;is prohibited [Title 27, § 20200(b)].
3. The discharge of wastes outside of a waste management unit or portions of a unit specifically designed for their containment is prohibited.
4. The discharge of solid waste containing free liquid or which may contain liquid in excess of the moisture holding capacity as a result of waste management operations, compaction or settlement is prohibited.
5. The discharge of waste to a closed landfill unit is prohibited.
6. The discharge of waste constituents to the unsaturated zone or to groundwater is prohibited.
7. The discharge of solid or liquid waste or leachate to surface waters, surface water drainage courses, or groundwater is prohibited.



**D. Standard Discharge Specifications**

1. The Discharger is responsible for accurate characterization of wastes, including a determination of whether or not wastes will be compatible with containment features and other wastes at the waste management unit and whether or not the wastes are required to be managed as a hazardous waste [Title 27, § 20200(c)] or designated waste [Title 27, § 20210].
2. Leachate and landfill gas condensate collected from a waste management unit shall be discharged to the unit from which it came, or discharged to an appropriate waste management unit in accordance with Title 27 and in a manner consistent with the waste classification of the liquid [Title 27, § 20200(d) and § 20340(g)].
3. The discharge of leachate or landfill gas condensate is restricted to those portions of a waste management unit that has a composite liner system and LCRS meeting the Federal Subtitle D requirements [40 C.F.R. § 258.28].
4. Leachate and condensate returned to a composite-lined landfill unit (when approved by this Order) shall be discharged and managed such that it does not cause instability of the waste, does not cause leachate seeps, does not generate additional landfill gas that is not extracted from the landfill by an active landfill gas extraction system, does not cause contaminants to enter surface water runoff, and does not cause leachate volumes to exceed the maximum capacity of the LCRS.
5. Any discharge of waste outside the portion of the landfill that was already covered with waste as of the landfill unit's respective Federal Deadline constitutes a "lateral expansion" and requires the installation of an approved composite liner system and LCRS [40 C.F.R. § 258.40(b)].
6. Wastes shall be discharged only into waste management units specifically designed for their containment and/or treatment, as described in this Order.
7. The discharge shall remain within the designated disposal area at all times.
8. The discharge of waste shall not cause a nuisance condition [Wat. Code, § 13050(m)].

**E. Standard Facility Specifications**

1. All waste management units shall be designed, constructed, and operated to ensure that wastes, including leachate, will be a minimum of 5 feet above the highest anticipated elevation of underlying groundwater [Title 27, § 20240(c)], including the capillary fringe.
2. Surface and subsurface drainage from outside of a waste management unit shall be diverted from the unit [Title 27, § 20365(e)].
3. Interim cover is daily and intermediate cover [Title 27, § 20750(a)]. Interim cover over wastes discharged to a landfill shall be designed and constructed to minimize percolation of liquids through the wastes [Title 27, § 20705(b)].
4. Intermediate cover consisting of compacted earthen material of at least twelve (12) inches shall be placed on all surfaces of the fill where no additional solid waste will be deposited within **180 days** [Title 27, § 20700(a)].
5. During wet weather conditions, the facility shall be operated and graded to minimize leachate generation.
6. The Discharger shall immediately notify the Central Valley Water Board staff of any slope failure occurring at a waste management unit. Any failure which threatens the integrity of containment features or the waste management unit shall be promptly corrected in accordance with an approved method [Title 27, § 21710(c)(2)].
7. The Discharger shall **immediately** notify Central Valley Water Board staff of any flooding, unpermitted discharge of waste off-site or outside of waste management units, equipment failure, or other change in site conditions which could impair the integrity of waste or leachate containment facilities or precipitation and drainage control structures.
8. The Discharger shall limit water used for facility maintenance within landfill areas to the minimum amount necessary for dust control and construction.
9. The Discharger shall maintain in good working order any facility, control system, or monitoring device installed to achieve compliance with the waste discharge requirements.

BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

10. The Discharger shall lock all groundwater monitoring wells with a lock on the well cap or monitoring well box. All monitoring devices shall be clearly labeled with their designation including all monitoring wells shall be easily accessible for required monitoring by authorized personnel. Each monitoring device shall be clearly visible and be protected from damage by equipment or vehicles.
11. The Discharger shall ensure that methane and other landfill gases are adequately vented, removed from landfill units, or otherwise controlled to prevent the danger of adverse health effects, nuisance conditions, degradation, or the impairment of the beneficial uses of surface water or groundwater due to migration through the unsaturated zone.
12. The Discharger shall maintain the depth of the fluid in the sump of each landfill unit at the minimum needed for efficient pump operation (the depth at which the pump turns on given the pump intake height and maximum pump cycle frequency).
13. The depth of fluid on the landfill liner shall not exceed **30 centimeters** (cm) [40 C.F.R. § 258.40(a)(2)]. This regulation is interpreted by the Central Valley Water Board to exclude the leachate sump. The Discharger shall **immediately** notify the Central Valley Water Board staff by telephone, and follow up in writing within **seven** days if monitoring reveals that the depth of fluid on any portion of the liner (excluding the sump) exceeds 30 cm (approximately 12 inches). The written notification shall include a timetable for remedial or corrective action necessary to achieve compliance with the leachate depth limitation.
14. Each LCRS shall be tested at least annually to demonstrate proper operation. The results of the tests shall be compared with earlier tests made under comparable conditions [Title 27, § 20340(d)].
15. The Discharger shall maintain a *Storm Water Pollution Prevention Plan and Monitoring Program and Reporting Requirements* in accordance with State Water Board Order No. 2018-0028-DWQ (Industrial General Permit) or most recent general industrial storm water permit), or retain all storm water on-site.
16. Internal site drainage from surface or subsurface sources shall not contact or percolate through wastes.
17. New MSW landfill units or lateral expansions of existing units shall not be sited in a “wetland” [as defined in 40 C.F.R. § 232.29(r)] unless there is no

BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

practical alternative; steps have been taken to assure no net loss of wetland; the landfill unit will not degrade the wetland; the unit will not jeopardize threatened or endangered species or produce adverse modification of a critical habitat or violate any requirement of the Marine Protection, Research, and Sanctuaries Act of 1972 [40 C.F.R. § 258.12].

**F. Standard Construction Specifications**

1. The Discharger shall submit for review and approval at least 90 days prior to proposed construction, design plans and specifications for new landfill modules that include the following:
  - a. Detailed construction drawings showing all required liner system components, the LCRS, leachate sump, unsaturated zone monitoring system, any proposed landfill gas monitoring and extraction points, and access to the LCRS for required annual testing.
  - b. A Construction Quality Assurance (CQA) Plan prepared by a California-registered civil engineer or certified engineering geologist, and that meets the requirements of Title 27, section 20324.
  - c. A geotechnical evaluation of the area soils, evaluating their use as the base layer or reference to the location of this information in the ROWD/JTD [Title 27, § 21750(f)(4)].
  - d. Information about the seismic design of the proposed new module (or reference to the location of this information in the ROWD/JTD) in accordance with Title 27, section 20370.
  - e. A revised water quality monitoring plan for groundwater detection monitoring (or information showing the existing plan is adequate) in accordance with Title 27, section 20415.
  - f. An Operation Plan (or reference to the location of this information in the ROWD/JTD) meeting the requirements of Title 27, section 21760(b).
2. All containment structures shall be designed by, and construction shall be supervised by, a California registered civil engineer or a certified engineering geologist, and shall be certified by that individual as meeting

BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

the prescriptive standards, or approved engineered alternative design, in accordance with this Order prior to waste discharge.

3. The Discharger shall not proceed with construction until the construction plans, specifications, and all applicable construction quality assurance plans have been approved. Waste management units shall receive a final inspection and approval of the construction by Central Valley Water Board staff before use of the unit commences [Title 27, § 20310(e)].
4. Any report, or any amendment or revision of a report, that proposes a design or design change that might affect a waste management unit's containment features or monitoring systems shall be approved by a California registered civil engineer or a certified engineering geologist [Title 27, § 21710(d)].
5. Materials used in containment structures shall have appropriate chemical and physical properties to ensure that such structures do not fail to contain waste because of pressure gradients, physical contact with waste or leachate, chemical reactions with soil or rock, climatic conditions, the stress of installation, or because of the stress of daily operations [Title 27, § 20320(a)].
6. Waste management units and their respective containment structures shall be designed and constructed to limit, to the greatest extent possible, ponding, infiltration, inundation, erosion, slope failure, washout, and overtopping [Title 27, § 20365(a)].
7. The Discharger shall design storm water conveyance systems for Class III units for a 100-year, 24-hour storm event, and shall design storm water conveyance systems for Class II units for a 1,000-year, 24-hour storm event [Title 27, § 21750(e)(3)].
8. All Class III landfill units shall be designed to withstand the maximum probable earthquake and Class II waste management units shall be designed to withstand maximum credible earthquake without damage to the foundation or to the structures that control leachate, or surface drainage, or erosion, or gas [Title 27, § 20370(a)].
9. The Discharger shall perform stability analyses that include components to demonstrate the integrity of the landfill foundation, final slopes, and containment systems under both static and dynamic conditions throughout the landfill's life including the closure period and post-closure maintenance period [Title 27, § 21750(f)(5)].

BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

10. New waste management units and expansions of existing units shall not be located on a known Holocene fault [Title 27, § 20260(d)].
11. Liners shall be designed and constructed to contain the fluid, including landfill gas, waste, and leachate [Title 27, § 20330(a)].
12. Hydraulic conductivities shall be determined primarily by appropriate field test methods in accordance with accepted civil engineering practice. The results of laboratory tests with both water and leachate, and field tests with water, shall be compared to evaluate how the field permeabilities will be affected by leachate. It is acceptable for the Discharger to use appropriate compaction tests in conjunction with laboratory hydraulic conductivity tests to determine field permeabilities as long as a reasonable number of field hydraulic conductivity tests are also conducted [Title 27, § 20320(c)].
13. Hydraulic conductivities specified for containment structures other than the final cover shall be relative to the fluids (leachate) to be contained. Hydraulic conductivities for the final cover shall be relative to water [Title 27, § 20320(b)].
14. A test pad for each barrier layer and final cover shall be constructed in a manner duplicating the field construction. Test pad construction methods, with the designated equipment, shall be used to determine if the specified density/moisture-content/hydraulic conductivity relationships determined in the laboratory can be achieved in the field with the compaction equipment to be used and at the specified lift thickness [Title 27, § 20324(g)(1)(A)].
15. Performance requirements for geosynthetic membranes shall include, but are not limited to, a need to limit infiltration of water, to the greatest extent possible; a need to control landfill gas emissions; mechanical compatibility with stresses caused by equipment traffic, and for final covers the result of differential settlement over time and durability throughout the post-closure maintenance period [Title 27, § 20324(i)(1)].
16. The Discharger shall ensure proper preparation of the subgrade for any liner system that includes a GCL so as to provide a smooth surface that is free from rocks, sticks, or other debris that could damage or otherwise limit the performance of the GCL.
17. The Discharger shall propose an electronic leak location survey of the top liner for any new landfill module in the construction quality assurance plan

unless the Discharger demonstrates that a leak location survey is not needed.

18. Leachate collection and removal systems are required for Class II landfills and surface impoundments, MSW landfills, and for Class III landfills which have a liner or which accept sewage or water treatment sludge [Title 27, § 20340(a)].
19. All new landfill units or lateral expansions of existing units that require a LCRS shall have a blanket-type LCRS that covers the bottom of the unit and extends as far up the sides as possible. The LCRS shall be of sufficient strength and thickness to prevent collapse under the pressures exerted by overlying wastes, waste cover materials, and by any equipment used at the unit [Title 27, § 20340(e)].
20. The LCRS shall be designed, constructed, maintained, and operated to collect and remove twice the maximum anticipated daily volume of leachate from the waste management unit [Title 27, § 20340(b)].
21. Leachate collection and removal systems shall be designed and operated to function without clogging through the scheduled closure of the landfill unit and during the post-closure maintenance period.
22. The LCRS shall be designed to maintain the depth of fluid over any portion of the LCRS of no greater than 30 cm [40 C.F.R. § 258.40(a)(2)], excluding the leachate sump. The leachate sump, leachate removal pump, and pump controls shall be designed and set to maintain a fluid depth no greater than the minimum needed for efficient pump operation [Title 27, § 20340(c)].
23. All construction of liner systems and final cover systems shall be performed in accordance with a Construction Quality Assurance Plan certified by a registered civil engineer or a certified engineering geologist [Title 27, § 20323].
24. The Construction Quality Assurance program shall be supervised by a registered civil engineer or a certified engineering geologist who shall be designated the CQA officer [Title 27, § 20324(b)(2)].
25. The Discharger shall ensure that a third party independent of both the Discharger and the construction contractor performs all of the construction quality assurance monitoring and testing during the construction of a liner system.

BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

26. The Discharger shall notify Central Valley Water Board staff at least **14 days** prior to commencing field construction activities including construction of a new lined cell or module, construction of a final cover, or any other construction that requires Central Valley Water Board staff approval under this Order.
27. The Discharger shall submit for review and approval at least **60 days** prior to proposed discharge, final documentation required in Title 27 Section 20324(d)(1)(C) following the completion of construction of a new lined landfill module. The report shall be certified by a registered civil engineer or a certified engineering geologist and include a statement that the liner system was constructed in accordance with the approved design plans and specifications, the CQA Plan, the requirements of the WDRs, and that it meets the performance goals of Title 27. The report shall contain sufficient information and test results to verify that construction was in accordance with the design plans and specifications, the construction quality assurance plan, and the performance goals of Title 27.
28. The Discharger shall not discharge waste onto a newly constructed liner system until the final documentation report has been reviewed and an acceptance letter has been received.

**G. Standard Closure and Post-Closure Specifications**

1. The Discharger shall submit a final or partial final closure and post-closure maintenance plan at least **two years** prior to the anticipated date of closure [Title 27, § 21780(d)(1)].
2. The Discharger shall notify the Central Valley Water Board in writing that a landfill unit or portion of a unit is to be closed either at the same time that the California Department of Resources Recycling and Recovery (CalRecycle) is notified or **180 days** prior to beginning any final closure activities, whichever is sooner [Title 27, § 21710(c)(5)(A)]. The notice shall include a statement that all closure activities will conform to the most recently approved final or partial final closure plan and that the plan provides for site closure in compliance with all applicable federal and state regulations [Title 27, § 21710(c)(5)(C)].
3. Initiation of closure activities shall begin within **30 days** of final waste receipt, or within one year of receipt of most recent waste if additional capacity remains [40 C.F.R. § 258.60(f)].



4. Closure activities shall be completed within **180 days** of the beginning of closure activities unless an extension is granted by the Executive Officer [40 C.F.R. § 258.60(g)].
5. The Discharger shall carry out both mandatory closure and normal closure of a waste management unit or a portion of a unit in accordance with a closure and post-closure maintenance plan approved by the Central Valley Water Board [Title 27, § 20950(a)(1)] through the issuance of closure waste discharge requirements.
6. The Discharger shall notify the Central Valley Water Board that a preliminary closure and post-closure maintenance plan has been prepared and placed in the operating record by the date of initial receipt of waste at any new MSW landfill unit or lateral expansion of any existing unit [40 C.F.R. § 258.60(d)]. This notification shall be included in the cover letter transmitting the preliminary closure and post-closure maintenance plan.
7. In addition to the applicable provisions of Title 27, the preliminary closure and/or the post-closure maintenance plans for MSW landfill units shall include the following:
  - a. A description of the steps necessary to close all MSW landfill units at any point during their active life in accordance with the cover design requirements [40 C.F.R. § 258.60(c)];
  - b. An estimate of the largest area of the landfill unit(s) ever requiring a final cover at any time during the active life of the unit(s) [40 C.F.R. § 258.60(c)(2)].
  - c. An estimate of the maximum inventory of wastes ever on-site over the active life of the waste management facility [40 C.F.R. § 258.60(c)(3)]; and
  - d. A schedule for completing all activities necessary to satisfy the closure criteria in 40 C.F.R. section 258.60 [40 C.F.R. § 258.60(c)(4)].
8. The final closure and post-closure maintenance plan for the waste management unit shall include at least the following: an itemized cost analysis, closure schedule, any proposed final treatment procedures, map, changes to the unit description presented in the most recent ROWD,

federal requirements for a MSW facility, land use of the closed unit, and a construction quality assurance plan [Title 27, § 21769(c) & (d)].

9. Closure of each waste management unit shall be under the direct supervision of a registered civil engineer or certified engineering geologist [Title 27, § 20950(b)].
10. The final cover of closed landfills shall be designed, graded, and maintained to prevent ponding and soil erosion due to high run-off velocities [Title 27, § 21090(b)(1)(A)].
11. The final grading design shall be designed and approved by a registered civil engineer or certified engineering geologist [Title 27, § 21090(b)(1)(C)].
12. All final cover designs shall include a minimum 1-foot thick erosion resistant layer [Title 27, § 21090(a)(3)(A)].
13. The Discharger shall close the landfill with minimum 15-foot wide benches every 50 vertical feet [Title 27, § 21090(a)].
14. Final cover slopes shall not be steeper than a horizontal to vertical ratio of one and three quarters to one and designs having any slopes steeper than a horizontal to vertical ratio of three to one, or having a geosynthetic component, shall have these aspects of their design specifically supported in the slope stability report required in Title 27, section 21750(f)(5) [Title 27, § 21090(a)].
15. For any portions of the final cover installed after July 18, 1997, for which the Central Valley Water Board has not approved a slope and foundation stability report on or before that date, the Discharger shall meet the requirements of Title 27, section 21750(f)(5) [Title 27, § 21090(a)(6)].
16. Areas with slopes greater than ten percent, surface drainage courses, and areas subject to erosion by wind or water shall be designed and constructed to prevent such erosion [Title 27, § 21090(b)(2)].
17. The Discharger shall design storm water conveyance systems for closed Class III units for a 100-year, 24-hour storm event, and shall design storm water conveyance systems for closed Class II units for a 1,000-year, 24-hour storm event [Title 27, § 21750(e)(3)].
18. Closed landfill units shall be provided with at least two permanent surveying monuments, installed by a licensed land surveyor or by a

registered civil engineer, from which the location and elevation of all wastes, containment structures, and monitoring facilities can be determined throughout the post-closure maintenance period [Title 27, § 20950(d)].

19. Following closure of any MSW landfill units, the Discharger shall notify the Executive Officer that the deed to the landfill facility property, or some other instrument that is normally examined during a title search, has been recorded and a copy placed in the operating record. The notation on the deed shall in perpetuity notify any potential purchaser of the property that the land has been used as a landfill facility and that use of the land is restricted to the planned use described in the post-closure maintenance plan [Title 27, § 20515(a)(4) and §21170, and 40 C.F.R. § 258.60(i)].
20. Construction or repair of the final cover system's low-hydraulic conductivity layer is to be carried out in accordance with an approved construction quality assurance plan [Title 27, § 21090(b)(1)(E)].
21. The Discharger shall incorporate into the closure and post-closure maintenance plan a cover-integrity monitoring and maintenance program which includes at least the following: a periodic leak search, periodic identification of other problem areas, prompt cover repair, and vegetation maintenance [Title 27, § 21090(a)(4)].
22. The Discharger shall complete a final cover survey upon completion of closure activities for that portion of the landfill. The final cover surveys shall include an initial survey and map [Title 27, § 21090(e)(1)].  
**Every five years**, the Discharger shall conduct a survey of the closed landfill cover and submit an iso-settlement map accurately depicting the estimated total change in elevation of each portion of the final cover's low-hydraulic-conductivity layer [Title 27, § 21090(e)(2)].
23. Within **30 days** of completion of all closure activities, the Discharger shall certify that all closure activities were performed in accordance with the most recently approved final closure plan and CQA Plan, and in accordance with all applicable regulations. The Discharger shall also certify that closed landfill units shall be maintained in accordance with and approved post-closure maintenance plan [Title 27, § 21710(c)(6)].
24. Within **180 days** of completion of closure construction activities, the Discharger shall submit final documentation of closure, including the Certification of Closure. The closure documents shall include a final

construction quality assurance report and any other documents necessary to support the certification [Title 27, § 21880].

25. The post-closure maintenance period shall continue until the Central Valley Water Board determines that wastes remaining in the landfill unit(s) no longer pose a threat to water quality [Title 27, § 20950(a)(1)].
26. The Discharger shall conduct a periodic leak search to monitor of the integrity of the final cover in accordance with the schedule in the approved final post- closure maintenance plan [Title 27, § 21090(a)(4)(A)].
27. The Discharger shall periodically inspect and identify problems with the final cover including areas that require replanting, erosion, areas lacking free drainage, areas damaged by equipment operations, and localized areas identified in the required five-year iso-settlement survey [Title 27, § 21090(a)(4)(B)].
28. The Discharger shall repair the cover promptly in accordance with a cover repair plan to be included in the final post-closure maintenance plan [Title 27, § 21090(a)(4)(C)].
29. Throughout the post-closure maintenance period, the Discharger shall maintain the structural integrity and effectiveness of all containment structures, maintain the final cover as necessary to correct the effects of settlement and other adverse factors, continue to operate the LCRS as long as leachate is generated and detected, maintain the monitoring systems, prevent erosion and related damage of the final cover due to drainage, and protect and maintain surveyed monuments [Title 27, § 21090(c)].
30. Post-closure maintenance shall be conducted for a minimum period of 30 years or until the waste no longer poses a threat to environmental quality, whichever is greater [Title 27, § 21180(a) and Title 27, § 21900(a)].

#### **H. Standard Financial Assurance Provisions**

1. The Discharger shall establish an irrevocable fund for closure and post-closure maintenance to ensure closure and post-closure maintenance of each classified unit in accordance with an approved closure and post-closure maintenance plan [Title 27, § 20950(f) and § 22207(a)].

2. The Discharger shall obtain and maintain assurances of financial responsibility for initiating and completing corrective action for all known and reasonably foreseeable releases from the waste management unit [Title 27, §20380(b), § 22221, and § 22222].

**I. Standard Monitoring Specifications**

1. The water quality monitoring program shall include appropriate and consistent sampling and analytical procedures and methods designed to ensure that monitoring results provide a reliable indication of water quality at all monitoring points and background monitoring points
2. [Title 27, § 20415(e)(4) and 40 C.F.R. § 258.53(b)].
3. All monitoring systems shall be designed and certified by a registered geologist or a registered civil engineer [Title 27, § 20415(e)(1)].
4. All monitoring wells shall be cased and constructed in a manner that maintains the integrity of the monitoring well bore hole and prevents the bore hole from acting as a conduit for contaminant transport [Title 27, § 20415(b)(4)(A)].
5. All sample chemical analyses of any material shall be performed by a laboratory certified by the California Department of Health Services [Wat. Code, § 13176(a)].
6. A Detection Monitoring Program for a new landfill facility shall be installed, operational, and one year of monitoring data collected from background monitoring points prior to the discharge of wastes [Title 27, § 20415(e)(6)].
7. Background for water samples or soil-pore gas samples shall be represented by the data from all samples taken from applicable background monitoring points during that reporting period (at least one sample from each background monitoring point).
8. The Discharger shall submit for approval, establish, and maintain an approved Sample Collection and Analysis Plan. The Sample Collection and Analysis Plan shall at a minimum include:
  - a. Sample collection procedures describing purging techniques, sampling equipment, and decontamination of sampling equipment;
  - b. Sample preservation information and shipment procedures;

BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

- c. Sample analytical methods and procedures;
- d. Sample quality assurance/quality control (QA/QC) procedures;
- e. Chain of Custody control; and
- f. Sample analysis information including sample preparation techniques to avoid matrix interferences, method detection limits (MDLs), practical quantitation limits (PQLs) and reporting limits (RLs), and procedures for reporting trace results between the MDL and PQL.

If required by the Executive Officer, the Discharger shall modify the Sample Collection and Analysis Plan to conform with this Order.

- 9. For any given monitored medium, the samples taken from all monitoring points and background monitoring points to satisfy the data analysis requirements for a given reporting period shall all be taken **within a span not to exceed 30 days**, unless a longer time period is approved, and shall be taken in a manner that ensures sample independence to the greatest extent feasible. Specific methods of collection and analysis must be identified. Sample collection, storage, and analysis shall be performed according to the most recent version of USEPA Methods, such as the latest editions, as applicable, of: (1) Methods for the Analysis of Organics in Water and Wastewater (USEPA 600 Series), (2) Test Methods for Evaluating Solid Waste (SW-846, latest edition), and (3) Methods for Chemical Analysis of Water and Wastes (USEPA 600/4-79-020), and in accordance with the approved Sample Collection and Analysis Plan. Appropriate sample preparation techniques shall be used to minimize matrix interferences.
- 10. If methods other than USEPA-approved methods or Standard Methods are used, or there is a proposed alternant USEPA method than the one listed in the MRP, the proposed methodology shall be submitted for review and approval prior to use, including information showing its equivalence to the required method.
- 11. The **methods of analysis and the detection limits** used must be appropriate for the expected concentrations. For the monitoring of any constituent or parameter that is found in concentrations which produce more than 90% non-numerical determinations (i.e., "trace" or "ND") in data from background monitoring points for that medium, the analytical method having the lowest MDL shall be selected from among those methods

which would provide valid results in light of any matrix effects or interferences.

12. The laboratory reporting limit (RL) for all reported monitoring data shall be set no greater than the practical quantitation limit (PQL).
13. **“Trace” results** - results falling between the MDL and the PQL - shall be reported as such, and shall be accompanied both by the estimated MDL and PQL values for that analytical run.
14. Laboratory data shall not be altered or revised by the Discharger. If the Discharger observes potential lab errors, it shall identify the issue in the monitoring report and shall describe steps that will be taken to prevent similar errors in the future.
15. **MDLs and PQLs** shall be derived by the laboratory for each analytical procedure, according to State of California laboratory accreditation procedures. These MDLs and PQLs shall reflect the detection and quantitation capabilities of the specific analytical procedure and equipment used by the lab, rather than simply being quoted from USEPA analytical method manuals. In relatively interference-free water, laboratory-derived MDLs and PQLs are expected to closely agree with published USEPA MDLs and PQLs. MDLs and PQLs shall be reported.
16. If the laboratory suspects that, due to a change in matrix or other effects, the true detection limit or quantitation limit for a particular analytical run differs significantly from the laboratory-derived MDL/PQL values, the results shall be flagged in the laboratory report accordingly, along with estimates of the detection limit and quantitation limit actually achieved. **The MDL shall always be calculated such that it represents the lowest achievable concentration associated with a 99% reliability of a nonzero result.** The PQL shall always be calculated such that it represents the lowest constituent concentration at which a numerical value can be assigned with reasonable certainty that it represents the constituent’s actual concentration in the sample. Normally, PQLs should be set equal to the concentration of the lowest standard used to calibrate the analytical procedure.
17. All **QA/QC** data shall be reported, along with the sample results to which they apply, including the method, equipment, analytical detection and quantitation limits, the percent recovery, an explanation for any recovery that falls outside the QC limits, the results of equipment and method blanks, the results of spiked and surrogate samples, the frequency of

BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

quality control analysis, and the name and signature of a responsible person from the laboratory. **Sample results shall be reported unadjusted for blank results or spike recoveries.** In cases where contaminants are detected in QA/QC samples (i.e., field, trip, or lab blanks), the accompanying sample results shall be appropriately flagged, but the analytical results shall not be adjusted.

18. Unknown chromatographic peaks shall be reported, flagged, and tracked for potential comparison to subsequent unknown peaks that may be observed in future sampling events. Identification of unknown chromatographic peaks that recur in subsequent sampling events may be required.
19. The sampling interval of each monitoring well shall be appropriately screened and fitted with an appropriate filter pack to enable collection of representative groundwater samples [Title 27, § 20415(b)(4)(B)]. Groundwater samples shall not be field-filtered prior to laboratory analysis [40 C.F.R. § 258.53(b)]. Groundwater samples needing filtering (e.g., samples to be analyzed for dissolved metals) shall be filtered by the laboratory prior to analysis.
20. Groundwater elevations shall be measured in each well immediately prior to purging, each time groundwater is sampled. The owner or operator shall determine the rate and direction of groundwater flow each time groundwater is sampled. Groundwater elevations in wells which monitor the same waste management area shall be measured within a period of time short enough to avoid temporal variations in groundwater flow which could preclude accurate determination of groundwater flow rate and direction [40 C.F.R. § 258.53(d)].
21. Monitoring wells, piezometers, and other measurement, sampling, and analytical devices must be operated and maintained so that they perform to design specifications throughout the life of the monitoring program [40 C.F.R. § 258.51(c)(2)]. Monitoring devices that cannot be operated and maintained to perform to design specifications shall be replaced after review and approval of a report (i.e., work plan) for the proposed replacement devices.
22. All borings are to be logged during drilling under the direct supervision of a registered geologist or registered civil engineer with expertise in stratigraphic well logging [Title 27, § 20415(e)(2)].



23. Soils are to be described according to the Unified Soil Classification System [Title 27, § 20415(e)(2)(A)]. Rock is to be described in a manner appropriate for the purpose of the investigation [Title 27, § 20415(e)(2)(B)].
24. The Discharger shall submit a work plan for review and approval at least **60 days** prior to installation or abandonment of groundwater monitoring wells.
25. The Discharger shall provide Central Valley Water Board staff a minimum of **one week** notification prior to commencing any field activities related to the installation or abandonment of monitoring devices.
26. The water quality protection standard shall consist of the constituents of concern (COC), concentration limits, and the point of compliance. The water quality protection standard shall apply during the active life of the waste management unit, closure period, post-closure maintenance period, and any compliance period under Title 27, section 20410 [Title 27, § 20390].
27. The point of compliance at which the water quality protection standard applies is a vertical surface located at the hydraulically downgradient limit of the waste management unit that extends through the uppermost aquifer underlying the unit [Title 27, § 20405].
28. The compliance period is the minimum period of time during which the Discharger shall conduct a water quality monitoring program and is the number of years equal to the active life of the waste management unit plus the closure period [Title 27, § 20410(a)].
29. The groundwater monitoring system shall include a sufficient number of monitoring points, installed at appropriate locations, to yield groundwater samples from the uppermost aquifer that represent the quality of groundwater that has not been affected by a release from the waste management unit [Title 27, § 20415(b)(1)(A)].
30. The Detection Monitoring Program shall include a sufficient number of monitoring points, installed at appropriate locations and depths to yield groundwater samples from the uppermost aquifer that represent the quality of groundwater passing the point of compliance to allow the detection of a release from the waste management unit [Title 27, § 20415(b)(1)(B)1.].

31. Additional monitoring points shall be added as necessary to provide the best assurance of the **earliest possible detection** of a release from the waste management unit [Title 27, § 20415(b)(1)(B)2.].
32. The Detection Monitoring Program shall also include a sufficient number of monitoring points installed at appropriate depths and locations to yield groundwater samples from other aquifers or perched zones not already monitored to provide the earliest possible detection of a release from the waste management unit [Title 27, § 20415(b)(1)(B)3. and 4., and §20420(b)].
33. A surface water monitoring system shall be established to monitor each surface water body that could be affected by a release from the waste management unit [Title 27, § 20415(c)].
34. An unsaturated zone monitoring system shall be established for each waste management unit [Title 27, § 20415(d)].
35. The Discharger shall notify Central Valley Water Board staff within **seven days** if fluid is detected in a previously dry LCRS, unsaturated zone monitoring system, or if a progressive increase is detected in the volume of fluid in a LCRS [Title 27, § 21710(c)(3)].
36. Driller's logs for all monitoring wells shall to be submitted to the Central Valley Water Board and the Department of Water Resources [Wat. Code, § 13751 and Title 27, § 20415(b)(3)].
37. Groundwater elevation, temperature, electrical conductivity, turbidity, and pH are to be accurately measured at each well each time groundwater is sampled [Title 27, § 21415(e)(13)].
38. The groundwater flow rate and direction in the uppermost aquifer and in any zones of perched water and in any additional portions of the zone of saturation being monitored shall be determined at least quarterly [Title 27, § 20415(e)(15)].
39. The Discharger shall graph all analytical data from each monitoring point and background monitoring point and shall submit the graphs to the Central Valley Water Board annually [Title 27, § 20415(e)(14)].
40. For each waste management unit, the Discharger shall collect all data necessary for selecting appropriate data analysis methods for establishing background values for each constituent of concern and for each

monitoring parameter [Title 27, § 20420(c)]. The Discharger shall propose a data analysis method that includes a detailed description of the criteria to be used for determining “measurably significant” (as defined in Title 27, section 20164) evidence of a release from the waste management unit and determining compliance with the water quality protection standard [Title 27, § 20415(e)(6) and (7)].

41. For statistical analysis of data, the Discharger shall use one of the methods described in Title 27, section 20415(e)(8)(A)-(E). A non-statistical data analysis method can be used if the method can achieve the goal of the particular monitoring program at least as well as the most appropriate statistical method [Title 27, § 20415(e)(8)]. The Discharger shall use a statistical or nonstatistical data analysis method that complies with Title 27, section 20415(e)(7, 8, 9, and 10), to compare the concentration of each constituent of concern or monitoring parameter with its respective background concentration to determine whether there has been a measurably significant evidence of a release from the waste management unit. For any given monitoring point at which a given constituent has already exhibited a measurably significant indication of a release at that monitoring point, the Discharger may propose to monitor the constituent, at that well, using a concentration-versus-time plot.
42. The Discharger may propose an alternate statistical method [to the methods listed under Title 27, section 20415(e)(8)(A-D)] in accordance with Title 27, section 20415(e)(8)(E), for review and approval.
43. The statistical method shall account for data below the practical quantitation limit (PQL) with one or more statistical procedures that are protective of human health and the environment. Any PQL validated pursuant to Title 27, section 20415(e)(7) that is used in the statistical method shall be the **lowest concentration (or value) that can be reliably achieved** within limits of precision and accuracy specified in the WDRs or an approved Sample Collection and Analysis Plan for routine laboratory operating conditions that are available to the facility. The Discharger’s technical report (Sample Collection and Analysis Plan and/or Water Quality Protection Standard Report), pursuant to Title 27, section 20415(e)(7), shall consider the PQLs listed in Appendix IX to Chapter 14 of Division 4.5 of Title 22, CCR, for guidance when specifying limits of precision and accuracy. For any given constituent monitored at a background or downgradient monitoring point, an indication that falls between the MDL and the PQL for that constituent (hereinafter called a “trace” detection) shall be identified and used in appropriate statistical or

non-statistical tests. Nevertheless, for a statistical method that is compatible with the proportion of censored data (trace and ND indications) in the data set, the Discharger can use the laboratory's concentration estimates in the trace range (if available) for statistical analysis, in order to increase the statistical power by decreasing the number of "ties".

44. The water quality protection standard for organic compounds which are not naturally occurring and not detected in background groundwater samples shall be taken as the detection limit of the analytical method used (e.g., USEPA methods 8260 and 8270).
45. Alternate statistical procedures may be used for determining the significance of analytical results for common laboratory contaminants (i.e., methylene chloride, acetone, diethylhexyl phthalate, and di-n-octyl phthalate) if part of an approved water quality protection standard. Nevertheless, analytical results involving detection of these analytes in any background or downgradient sample shall be reported and flagged for easy reference by Central Valley Water Board staff.
46. **Confirmation of Measurably Significant Evidence of a Release.** Whenever a constituent is detected at a detection monitoring point at a concentration that exceeds the concentration limit from the water quality protection standard, the Discharger shall conduct verification sampling to confirm if the exceedance is due to a release or if it is a false-positive (unless previous monitoring has already confirmed a release for that constituent at that monitoring point). An exceedance of the concentration limit from the water quality protection standard is considered measurably significant evidence of a release that must be either confirmed or denied. There are two separate verification testing procedures:
  - a. Standard Monitoring Specification I.46 provides the procedure for analytes that are detected in less than 10% of the background samples such as non- naturally occurring constituents like volatile organic compounds; and
  - b. Standard Monitoring Specification I.47 provides the procedure for analytes that are detected in 10% or greater of the background samples such as naturally occurring constituents like chloride.
47. **Verification Procedure for Analytes Detected in Less than 10% of Background Samples.** The Discharger shall use the following non-statistical method for all analytes that are detected in less than 10% of the

background samples. The non-statistical method shall be implemented as follows:

- a. **Initial Determination of Measurably Significant Evidence of a Release.** Identify each analyte in the current detection monitoring point sample that exceeds either its respective MDL or PQL, and for which a release has not been previously confirmed. The Discharger shall conclude that the exceedance provides a preliminary indication of a release or a change in the nature or extent of the release, at that monitoring point, if ***either***:
  - i. The data contains two or more analytes that equal or exceed their respective MDLs; or
  - ii. The data contains one or more analyte that equals or exceeds its PQL.
- b. **Discrete Retest** [Title 27, § 20415(e)(8)(E) and § 20420(j)(1-3)]:
  - i. In the event that the Discharger or Central Valley Water Board staff concludes (pursuant to paragraph 1.46.a., above) that there is a preliminary indication of a release, then the Discharger shall immediately notify Central Valley Water Board staff by phone or e-mail and, within 30 days of such indication, shall collect two new (retest) samples from the monitoring point where the release is preliminarily indicated and analyze them for the constituents that caused the need for the retest.
  - ii. **Confirmation of a Release.** As soon as the retest data are available, the Discharger shall conclude that measurably significant evidence of a release is confirmed if (not including the original sample) two or more analytes equal or exceed their respective MDLs or if one or more analyte equals or exceeds its PQL. The Discharger shall then:
    - (A) **Immediately** verbally notify the Central Valley Water Board whether or not the retest confirmed measurably significant evidence of a release for the analyte at the monitoring point, and follow up with written notification

submitted by certified mail within seven days of the verbal notification; and

- (B) Carry out the requirements of Section J, **RESPONSE TO A RELEASE** if a release has been confirmed.
- (C) Add any five-year analyte that is confirmed per this method to the monitoring parameter list such that it is monitored during each regular monitoring event.

**48. Verification Procedure for Analytes Detected in 10% or Greater of the Background Samples.** The Discharger shall use either a statistical or non-statistical method pursuant to Title 27, section 20415(e)(8)(E) for all analytes that are detected in 10% or greater of the background samples. The Discharger shall use one of the statistical methods required in Title 27, section 20415(e)(8)(E) unless another method has been proposed by the Discharger in a Water Quality Protection Standard Report (or equivalent report) and approved by the Central Valley Water Board in a Monitoring and Reporting Program pursuant to Title 27, section 20415(e)(8)(A-D)] or section 20415(e)(8)(E). The method shall be implemented as follows:

- a. **Initial Determination of Measurably Significant Evidence of a Release.** The Discharger shall compare the value reported by the laboratory for each analyte to the statistically-derived concentration limit from the most recent report (Annual Monitoring Report or Water Quality Protection Standard Report) that uses the approved statistical procedure. If the value exceeds the concentration limit for that constituent, the Discharger shall conclude that there is measurably significant evidence of a release [Title 27, § 20420(i)].
- b. **Retest Method** [Title 27, § 20415(e)(8)(E) and § 20420(j)(1-3)].
  - i. In the event that the Discharger or Central Valley Water Board staff concludes (pursuant to paragraph 1.47.a., above) that there is a preliminary indication of a release, then the Discharger shall immediately notify Central Valley Water Board staff by phone or e-mail and, within 30 days [Title 27, § 20415(e)(3)] of such indication, the Discharger shall implement a verification procedure/retest option, in accordance with Title 27, sections 20415(e)(8)(E) and 20420(j)(2). The verification procedure shall include either a

single “composite” retest (i.e., a statistical analysis that augments and reanalyzes the data from the monitoring point that indicated a release) or shall consist of at least two “discrete” retests (i.e., statistical analyses each of which analyzes only newly-acquired data from the monitoring point that indicated a release) [Title 27, § 20415(e)(8)(E)]. The Discharger may use an alternate method previously approved by the Central Valley Water Board and included in the Monitoring and Reporting Program. The verification procedure shall comply with the requirements of Title 27, section 20415(e)(8)(E) in addition to the performance standards of Title 27, section 20415(e)(9). The retest samples shall be collected from the monitoring point where the release is preliminarily indicated and shall be analyzed for the constituents that caused the need for the retest. For any indicated monitoring parameter or constituent of concern, if the retest results of one or more of the retest data suites confirm the original indication, the Discharger shall conclude that measurably significant evidence of a release has been confirmed.

- ii. **Confirmation of a Release.** As soon as the retest data are available, the Discharger shall evaluate the results pursuant to paragraph I.47.b.1, above and shall:
  - (A) **Immediately** verbally notify the Central Valley Water Board whether or not the retest confirmed measurably significant evidence of a release for the analyte at the monitoring point, and follow up with written notification submitted by certified mail within seven days of the verbal notification; and
  - (B) Carry out the requirements of Section J, **RESPONSE TO A RELEASE** if a release has been confirmed.
  - (C) Add any five-year analyte that is confirmed per this method to the monitoring parameter list such that it is monitored during each regular monitoring event.

- 49. Physical Evidence of a Release.** If the Discharger determines that there is a significant physical evidence of a release, the Discharger shall immediately verbally notify Central Valley Water Board staff and provide written notification by certified mail within 7 days of such determination, and within 90 days shall submit an amended report of waste discharge to establish an Evaluation Monitoring Program [Title 27, § 20385(a)(3) and § 20420(l)(1) & (2)].

**J. Response to Release**

- 1. Measurably Significant Evidence of a Release Has Been Confirmed.** If the Discharger has confirmed that there is measurably significant evidence of a release from a waste management unit pursuant to Standard Monitoring Specification I.46 or I.47, then the Discharger shall:
- a. Immediately** sample all monitoring points in the affected medium at that waste management unit and determine the concentration of all monitoring parameters and constituents of concern for comparison with established concentration limits. Because this constituent of concern scan does not involve statistical testing, the Discharger will need to collect and analyze only a single water sample from each monitoring point in the affected medium [Title 27, § 20420(k)(1)].
  - b. Within 14 days** of confirming measurably significant evidence of a release, the Discharger shall (for releases from MSW landfill units) notify all persons who own the land or reside on the land that directly overlies any portion of the plume of contamination if contaminants have migrated off-site if indicated by sampling of detection monitoring wells [40 C.F.R. § 258.55(g)(1)(iii)].
  - c. Within 90 days** of confirming measurably significant evidence of a release, the Discharger shall submit an amended report of waste discharge to establish an Evaluation Monitoring Program meeting the requirements of Title 27, sections 20420(k)(5)(A-D), including but not limited to the results of sampling pursuant to paragraph J.1.a, above. The Evaluation Monitoring Program shall be designed for the collection and analysis of all data necessary to assess the nature and extent of the release and to determine the spatial distribution and concentration of each constituent throughout the zone affected by the release [Title 27, § 20420(k)(5) and § 20425(b)]. For releases from MSW landfill units, the Evaluation Monitoring Program shall also include any additional proposals



BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**STANDARD PROVISIONS & REPORTING REQUIREMENTS**

necessary to comply with 40 C.F.R. § 258.55, particularly the additional monitoring well required by 40 C.F.R. § 258.55(g)(1)(ii).

- d. **Within 180 days** of confirming measurably significant evidence of a release, the Discharger shall submit to the Central Valley Water Board an initial engineering feasibility study for a Corrective Action Program necessary to meet the requirements of Title 27, section 20430. At a minimum, the initial engineering feasibility study shall contain a detailed description of the corrective action measures that could be taken to achieve background concentrations for all constituents of concern [Title 27, § 20420(k)(6)].
- e. If the Discharger confirms that there is measurably significant evidence of a release from the waste management unit at any monitoring point, the Discharger may attempt to demonstrate that a source other than the waste management unit caused the evidence of a release or that the evidence is an artifact caused by an error in sampling, analysis, or statistical evaluation or by natural variation in groundwater, surface water, or the unsaturated zone. The Discharger may make a demonstration pursuant to Title 27, section 20420(k)(7) in addition to or in lieu of submitting both an amended report of waste discharge or an engineering feasibility study; however, the Discharger is not relieved of the requirements and due dates of Title 27, sections 20420(k)(6) & (7) unless Central Valley Water Board staff agree that the demonstration successfully shows that a source other than the waste management unit caused the evidence of a release or that the evidence resulted from error in sampling, analysis, or statistical evaluation or from natural variation in groundwater, surface water, or the unsaturated zone. In order to make this demonstration, the Discharger shall notify the Central Valley Water Board by certified mail of the intent to make the demonstration **within seven days** of determining measurably significant evidence of a release, and shall submit a report **within 90 days** of determining measurably significant evidence of a release [Title 27, § 20420(k)(7)].
- f. **Within 90 days** of the date that the Evaluation Monitoring Program from paragraph J.1.c is approved (the date is it established), the Discharger shall complete and submit the following:
  - i. **Results and Assessment for the Evaluation Monitoring Program.** A report with the results and assessment based

on the approved Evaluation Monitoring Program [Title 27, § 20425(b)].

- ii. **Updated Engineering Feasibility Study.** An updated engineering feasibility study for corrective action based on the data collected to delineate the release and data from the ongoing monitoring program required under Title 27, section 20425(e) [Title 27, § 20425(c)].
  - iii. **Amended ROWD for a Corrective Action Program.** An amended report of waste discharge to establish a Corrective Action Program meeting the requirements of Title 27, section 20430 based on the data collected to delineate the release and based on the updated engineering feasibility study [Title 27, § 20425(d)].
- g. The Discharger shall (for releases from MSW landfill units) discuss the results of the updated engineering feasibility study, prior to the final selection of a remedy, in a public meeting with interested and affected parties [40 C.F.R. § 258.56(d)].

**K. General Provisions**

- 1. In the event the Discharger does not comply or will be unable to comply with any prohibition or limitation of this Order for any reason, the Discharger shall notify the appropriate Central Valley Water Board office by telephone as soon as it or its agents have knowledge of such noncompliance or potential for noncompliance, and shall confirm this notification in writing **within two weeks**. The written notification shall state the nature, time, and cause of noncompliance, and shall describe the measures being taken to prevent recurrences and shall include a timetable for corrective actions.
- 2. All reports and transmittal letters shall be signed by persons identified below:
  - a. For a corporation: by a principal executive officer of at least the level of senior vice-president.
  - b. For a partnership or sole proprietorship: by a general partner or the proprietor.

- c. For a municipality, state, federal or other public agency: by either a principal executive officer or ranking elected or appointed official.
- d. A duly authorized representative of a person designated in a, b or c above if:
  - i. The authorization is made in writing by a person described in a, b, or c of this provision;
  - ii. The authorization specifies either an individual or a position having responsibility for the overall operation of the regulated facility or activity, such as the position of plant manager, operator of a Unit, superintendent, or position of equivalent responsibility (a duly authorized representative may thus be either a named individual or any individual occupying a named position); and
  - iii. The written authorization is submitted to the Central Valley Water Board.
- e. Any person signing a document under this Section shall make the following certification:

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this document and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

- 3. The Discharger shall take all reasonable steps to minimize any adverse impact to the waters of the State resulting from noncompliance with this Order. Such steps shall include accelerated or additional monitoring as necessary to determine the nature, extent, and impact of the noncompliance.
- 4. The owner of the waste management facility shall have the continuing responsibility to assure protection of waters of the state from discharged wastes and from gases and leachate generated by discharged waste

during the active life, closure, and post-closure maintenance period of the waste management units and during subsequent use of the property for other purposes.

5. The fact that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with this Order shall not be regarded as a defense for the Discharger's violations of this Order.
6. The Discharger shall notify the Central Valley Water Board of a material change in; the types, quantity, or concentrations of wastes discharged; site operations and features; or proposed closure procedures, including changes in cost estimates. This notification shall be given a reasonable time before the changes are made or become effective. No changes shall be made without Central Valley Water Board approval following authorization for closure pursuant to the site Notification of Closure [Title 27, § 21710(a)(4)].
7. The Discharger shall maintain legible records of the volume and type of each waste discharged at each waste management unit or portion of a unit, and the manner and location of discharge. Such records shall be maintained by the Discharger until the beginning of the post-closure maintenance period. These records shall be on forms approved by the State Water Board or Central Valley Water Board and shall be maintained at the waste management facility until the beginning of the post-closure maintenance period. These records shall be available for review by representatives of the State Water Board or Central Valley Water Board at any time during normal business hours. At the beginning of the post-closure maintenance period, copies of these records shall be sent to the Central Valley Water Board [Title 27, § 21720(f)].
8. In the event of any change in landowner or the operator of the waste management facility, the Discharger shall notify the succeeding owner or operator in writing of the existence of this Order. A copy of that notification shall be sent to the Central Valley Water Board.
9. In the event of any change of ownership or responsibility for construction, operation, closure, or post-closure maintenance of the waste discharge facilities described in this Order, the Discharger shall notify the Central Valley Water Board prior to the effective date of the change and shall include a statement by the new Discharger that construction, operation, closure, or post-closure maintenance will be in compliance with this Order and any revisions thereof [Title 27, § 21710(c)(1)].

10. To assume ownership or operation under this Order, the succeeding owner or operator must apply in writing to the Central Valley Water Board requesting transfer of the Order within **14 days** of assuming ownership or operation of this facility. The request must contain the requesting entity's full legal name, the State of incorporation if a corporation, the name and address and telephone number of the persons responsible for contact with the Central Valley Water Board, and a statement. The statement shall comply with the signatory requirements contained in General Provision K.2 and state that the new owner or operator assumes full responsibility for compliance with this Order. Failure to submit the request shall be considered a discharge without requirements, a violation of the Water Code. Transfer of this Order shall be approved or disapproved by the Central Valley Water Board.

**L. Storm Water Provisions**

1. New and existing Class III landfills shall be designed, constructed, operated, and maintained to prevent inundation or washout due to floods with a 100-year return period [Title 27, § 20260(c)].
2. New and existing Class II landfills shall be designed, constructed, operated, and maintained to prevent inundation or washout due to floods with a 100-year return period [Title 27, § 20250(c)].
3. The Discharger shall design storm water conveyance systems for Class III units for a 100-year, 24-hour storm event, and shall design storm water conveyance systems for Class II units for a 1,000-year, 24-hour storm event [Title 27, § 21750(e)(3)].
4. MSW landfills located in a 100-year floodplain shall demonstrate that the landfill unit will not restrict the flow of the 100-year flood, reduce the temporary water storage capacity of the floodplain, or result in washout of solid waste so as to pose a hazard to human health or the environment [40 C.F.R. § 258.11(a)].
5. Waste management units and their respective containment structures shall be designed and constructed to limit, to the greatest extent possible, ponding, infiltration, inundation, erosion, slope failure, washout, and overtopping under the precipitation conditions for the unit [Title 27, § 20365(a)].
6. Precipitation on landfills or waste piles which is not diverted by covers or drainage control systems shall be collected and managed through the

LCRS, which shall be designed and constructed to accommodate the precipitation conditions for each class unit [Title 27, § 20365(b)].

7. Diversion and drainage facilities shall be designed, constructed, and maintained to [Title 27, § 20365(c)]:
  - a. accommodate the anticipated volume of precipitation and peak flows from surface runoff and under the precipitation conditions for the waste management unit;
  - b. effectively divert sheet flow runoff laterally, via the shortest distance, into the drainage and collection facilities;
  - c. prevent surface erosion;
  - d. control and intercept run-on, in order to isolate uncontaminated surface waters from water that might have come into contact with waste;
  - e. take into account:
    - i. for closed waste management units and for closed portions of units, the expected final contours of the closed unit, including its planned drainage pattern;
    - ii. for operating portions of waste management units other than surface impoundments, the unit's drainage pattern at any given time;
    - iii. the possible effects of the waste management unit's drainage pattern on and by the regional watershed;
    - iv. the design capacity of drainage systems of downstream and adjacent properties by providing for the gradual release of retained water downstream in a manner which does not exceed the expected peak flow rate at the point of discharge if there were no waste management facility; and
  - f. preserve the system's function. The Discharger shall periodically remove accumulated sediment from the sedimentation or detention basins as needed to preserve the design capacity of the system.

8. Collection and holding facilities associated with precipitation and drainage control systems shall be emptied immediately following each storm or otherwise managed to maintain the design capacity of the system [Title 27, § 20365(d)].
9. Surface and subsurface drainage from outside of a waste management unit shall be diverted from the unit [Title 27, § 20365(e)].
10. Cover materials shall be graded to divert precipitation from the waste management unit, to prevent ponding of surface water over wastes, and to resist erosion as a result of precipitation [Title 27, § 20365(f)].

Any drainage layer in the final cover shall be designed and constructed to intersect with the final drainage system for the waste management unit in a manner promoting free drainage from all portions of the drainage layer [Title 27, §20365(f)].  
[paste SPRRs here]

CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL VALLEY REGION

[TENTATIVE] WASTE DISCHARGE REQUIREMENTS ORDER R5-2022-XXXX  
FOR  
BUTTE COUNTY  
NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL  
BUTTE COUNTY

**INFORMATION SHEET**

Neal Road Landfill (Facility) is a Class III solid waste landfill owned and operated by Butte County (Discharger). The Facility occupies approximately 190 acres of which 140 acres are utilized for waste disposal and 10 acres are permitted for the processing and transfer of waste. The Facility has been active since 1965 and was originally operated as a burn dump prior to conversion to a landfill in 1970. The Facility is being utilized for the disposal of municipal solid waste (MSW) from residential and commercial sources from unincorporated Butte County, the cities of Biggs, Chico, Gridley, and Oroville, and the Town of Paradise. The Facility has a projected lifespan until 2051 based on existing available capacity and planned expansion of Module 5. If the Discharger acquires more land at a future date, additional future modules may be constructed which would extend the projected lifespan.

The Facility includes five Class III waste management units (WMUs). Referred to as Modules 1 through 5. Modules 1 and 3 are closed, unlined units covering approximately 49.5 acres. Module 2 (16.5 acres) is closed and has a clay liner and blanket type leachate collection and removal system (LCRS). Module 4 has a composite liner system, leakage detection system (LDS), and an integrated LCRS. Module 4 is still accepting waste. Portions of Module 5 have been excavated and constructed. Module 5, Phase A was constructed in the summer of 2017. Module 5, Phase B was constructed in the summers of 2018 and 2019, and extends into the area that previously housed the Facility's clean-closed supernatant pond. Module 5, Phase C was completed in 2020 in the area of the clean-closed septage pond. Completed phases of Module 5 are accepting waste.

The Facility has a Class II surface impoundment with a LDS. The surface impoundment is used for leachate storage and an evaporation system is used to reduce leachate volume. Excess leachate is trucked off-site to the City of Chico Wastewater Treatment Plant. A septage transfer station was constructed onsite and began operating in 2019 and septage is trucked to Placer County Wastewater Treatment Plant.

The Facility is located along the eastern edge of the Sacramento Valley. The Facility receives 26 inches of precipitation per year on average. The nearest downgradient surface water is an unnamed stream which discharges into Hamlin Slough, approximately one mile southwest of the Facility boundary. The geologic conditions in this region are dominated by the Tuscan Formation. Groundwater at the Facility is



BUTTE COUNTY

NEAL ROAD CLASS III MUNICIPAL SOLID WASTE LANDFILL

BUTTE COUNTY

**INFORMATION SHEET**

unconfined. The uppermost aquifer beneath the facility occurs in the Tuscan Formation at approximately 125 to 138 feet below ground surface (bgs).

The Facility has ten active groundwater monitoring wells, including two background wells, five point of compliance (POC) wells, and three corrective action wells. The WDRs Order requires submittal of a Monitoring Network Augmentation Work Plan to address deficiencies in the groundwater monitoring network and update the hydrogeologic conceptual model. Vadose zone monitoring is provided by four suction lysimeters and a pan lysimeter. The current landfill gas collection and control system is comprised of 57 vertical gas extraction wells, 10 vadose zone collection wells, 8 horizontal gas collection wells, and 14 perimeter gas probes.

In 1993, volatile organic compounds (VOCs) were detected in the vadose zone and inorganic parameter concentrations in POC wells were found to exceed background-based concentration limits. The Discharger submitted the November 1995 Corrective Action Plan (CAP) which included the placement of plastic barriers on the top deck, and cement on the side slopes during interim closure to minimize infiltration of rainfall. The Discharger implemented this CAP in 1996. In August 2000, staff directed the Discharger to assess groundwater conditions based on increasing inorganic parameter concentrations and VOC detections. The assessment found that the source of seepage was from Modules 1, 2, and 3 and the former unlined septage pond (which later became Module 4). The Discharger proposed closure of Modules 1 through 3 which was completed in 2007. Following completion of closure of Modules 1 through 3, VOC and inorganic parameter concentrations have stabilized or decreased.