

**California Regional Water Quality Control Board  
Central Coast Region**

**Total Maximum Daily Load for Fecal Indicator  
Bacteria for the San Lorenzo Creek Watershed,  
Monterey and San Benito Counties, California**

**Final Project Report  
April 2011**

Adopted by the  
California Regional Water Quality Control Board  
Central Coast Region  
on May 17, 2011

and the  
United States Environmental Protection Agency  
on November 30, 2011

**CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD  
CENTRAL COAST REGION**

895 Aerovista Place, Suite 101, San Luis Obispo, California 93401

Phone • (805) 549-3147

<http://www.waterboards.ca.gov/centralcoast/>

To request copies of this TMDL Project Report for Fecal Indicator Bacteria for the San Lorenzo Creek Watershed, please contact Pete Osmolovsky at (805)549-3699, or by email at [paosmolovsky@waterboards.ca.gov](mailto:paosmolovsky@waterboards.ca.gov); Documents also are available at:

[http://www.waterboards.ca.gov/centralcoast/water\\_issues/programs/tmdl/303d\\_and\\_tmdl\\_projects.shtml](http://www.waterboards.ca.gov/centralcoast/water_issues/programs/tmdl/303d_and_tmdl_projects.shtml)

# STATE OF CALIFORNIA

EDMUND G. BROWN, Jr., Governor  
LINDA S. ADAMS, Acting Secretary, California Environmental Protection Agency



## State Water Resources Control Board

Charles R. Hoppin, Chair	Water Quality
Frances Spivey-Weber, <i>Vice Chair</i>	Public
Arthur G. Baggett, Jr.	Attorney, Water Supply & Water Rights
Tam M. Doduc	Civil Engineer, Water Supply & Water Rights
Walter G. Pettit	Sanitary Engineer, Water Quality

Dorothy Rice, *Executive Director*

## California Regional Water Quality Control Board Central Coast Region

Jeffrey S. Young, <i>Chair</i>	Water Supply
Russell M. Jeffries, <i>Vice Chair</i>	Water Quality
Vacant	County Government
Monica S. Hunter	Public
Dr. Jean-Pierre Wolff	Recreation, Fish or Wildlife
David T. Hodgins	Water Quality
Vacant	Water Quality
John H. Hayashi	Irrigated Agriculture
Vacant	Municipal Government

Roger Briggs, *Executive Officer*  
Michael Thomas, *Assistant Executive Officer*

### This report was prepared under the direction of

Chris Rose., *TMDL Program Manager*

**by**

Pete Osmolovsky, *Engineering Geologist*

**with the assistance of**

Mary Adams, *Environmental Scientist*  
Erin Sanderson, *CCAMP Field Consultant*

# CONTENTS

Contents .....	iv
Figures.....	vi
Tables.....	vi
Executive Summary.....	8
<b>1 Introduction .....</b>	<b>13</b>
1.1 Clean Water Act Section 303(d) List .....	13
1.2 Project Area.....	13
1.3 Pollutants Addressed.....	14
<b>2 Problem Identification.....</b>	<b>14</b>
2.1 Watershed Description .....	14
2.1.1 Watershed Delineation.....	15
2.1.2 Land Use and Land Cover .....	16
2.1.3 Hydrology .....	18
2.1.4 Climate and Precipitation .....	19
2.1.5 Geology and Soils.....	20
2.1.6 Demographics.....	20
2.2 Beneficial Uses.....	21
2.3 Water Quality Objectives and Criteria .....	22
2.3.1 Shellfish Harvesting (SHELL):.....	22
2.3.2 Water Contact Recreation (REC-1):.....	23
2.3.3 Non-Contact Water Recreation (REC-2): .....	23
2.3.4 Controllable Water Quality conditions .....	23
2.4 Data Analysis.....	23
2.4.1 Water Quality Impairments.....	23
2.4.2 Water Quality Temporal Trends .....	27
2.4.3 Spatial Trends at Water Quality Monitoring Sites .....	27
2.4.4 Problem Statement .....	30
<b>3 Numeric Targets.....</b>	<b>31</b>
<b>4 Source Analysis .....</b>	<b>31</b>
4.1 Inventory of Fecal Coliform Producers.....	31
4.2 Point Sources .....	34
4.2.1 NPDES-Permitted Facility Discharges to Surface Waters .....	34
4.2.2 Sanitary Sewer Collection and Treatment Systems.....	35
4.2.3 MS4 Storm Water Entities.....	36
4.3 Nonpoint Sources .....	38
4.3.1 Grazing Operations.....	38
4.3.2 Confined Animal Operations .....	40
4.3.3 Cropland and Manure Application .....	40
4.3.4 Onsite Disposal Systems .....	42
4.3.5 Sediment Sources (Bedload) .....	43
4.3.6 Non-controllable Natural Sources .....	45

4.4	Summary of Sources .....	46
<u>5</u>	<u>Loading Capacity and Allocations.....</u>	<u>48</u>
5.1	Introduction.....	48
5.2	Loading Capacity.....	48
5.3	Linkage Analysis.....	48
5.4	TMDL Allocations .....	49
5.4.1	Concentration-based TMDL .....	49
5.4.2	TMDL Allocations.....	50
5.4.3	Daily Load Expressions.....	51
5.5	Margin of Safety .....	51
5.6	Critical Conditions and Seasonal Variation .....	52
<u>6</u>	<u>Implementation and Monitoring .....</u>	<u>52</u>
6.1	Implementation Plan .....	52
6.2	Implementing Parties.....	53
6.3	Existing Plans and Policies.....	53
6.3.1	California Impaired Waters Policy and Impaired Waters Guidance .....	53
6.3.2	California Nonpoint Source Program Plan.....	54
6.3.3	Policy for Implementation and Enforcement of the Nonpoint Source Program ...	55
6.3.4	Central Coast Basin Plan .....	56
6.3.5	California Rangeland Water Quality Management Plan.....	56
6.4	Implementation Mechanism for San Lorenzo Creek TMDL .....	57
6.4.1	For Control of Pathogen Loading - Milestones .....	58
6.5	Monitoring and Reporting .....	60
6.5.1	Implementation Monitoring.....	60
6.5.2	Water Quality Monitoring.....	61
6.6	Timeline and Milestones .....	62
6.6.1	Timeline to Achieve Loading Capacity .....	62
6.6.2	Evaluation of Progress.....	63
6.7	Cost Estimates and Funding Sources.....	64
<u>7</u>	<u>Public Participation.....</u>	<u>64</u>
	<u>References .....</u>	<u>65</u>
	<u>Appendix A: Water Quality Data and Field Notes.....</u>	<u>69</u>
	<u>Appendix B: Flow Duration Curve .....</u>	<u>71</u>
	<u>Appendix C: Supplemental Maps and Spatial Data .....</u>	<u>73</u>
	<u>Appendix D: Fecal Coliform Producer Inventory Data .....</u>	<u>80</u>
	<u>Appendix E: CIWQS Data: Spills and Sanitary Sewer Overflows .....</u>	<u>86</u>
	<u>Appendix F: Bacteria Source Load Calculator (BSLC) Spreadsheets.....</u>	<u>88</u>
	<u>Appendix G: Bedloads - Bacteria Load Estimator Spreadsheets (BLEST) .....</u>	<u>90</u>
	<u>Appendix H: Load Duration Curves.....</u>	<u>92</u>
	<u>Appendix I: Daily Load Expressions.....</u>	<u>96</u>

**FIGURES**

Figure 1-1. TMDL Project Area – San Lorenzo Creek watershed..... 14

Figure 2-1. Project Area relief map and subwatersheds..... 15

Figure 2-2. Land Use – Land Cover in San Lorenzo Creek watershed (*source: FMMP, 2008*).. 17

Figure 2-3. Mean monthly flows, San Lorenzo Creek at USGS flow gage..... 18

Figure 2-4. Flow conditions in the San Lorenzo Creek watershed (*source: USGS-NHD*). ..... 19

Figure 2-5. Census Block Data. .... 21

Figure 2-6. Statistical summary of fecal indicator bacteria water quality data. .... 26

Figure 2-7. Temporal plot of fecal indicator bacteria data..... 27

Figure 2-8. Water Quality Monitoring Sites..... 28

Figure 2-9. Analysis of Paired Water Quality Data from 309LOR and 309LOK. .... 29

Figure 4-1. Estimated fecal coliform production (%) ..... 33

Figure 4-2. NPDES-permitted discharges to surface waters..... 35

Figure 4-3. King City wastewater treatment plant facilities. .... 36

Figure 4-4. King City MS4 area and vicinity..... 37

Figure 4-5. Percent of cropland receiving manure application (*source: NASS*)..... 41

Figure 4-6. OSDS density, San Lorenzo Creek watershed and vicinity (*source: Census Bureau*). ..... 42

Figure 4-7. Percent clay in soils in the San Lorenzo Creek watershed (*source: NRCS*) ..... 44

Figure 4-8. Estimated distribution of fecal coliform annually available for potential discharge to surface waters..... 47

**TABLES**

Table 2-1. Tabulation of San Lorenzo Creek watershed land use / land cover. .... 18

Table 2-2. Precipitation record for NCDC weather stations 044555 and 047150. .... 20

Table 2-3. Beneficial uses of San Lorenzo Creek..... 22

Table 2-4. Data required to assert impairment (*source: SWRCB, 2004*)..... 24

Table 2-5. USEPA recommended criteria for E. coli..... 24

Table 2-6. Fecal Indicator Bacteria samples exceeding water quality objectives. .... 25

Table 2-7. Confirmed impaired waterbodies..... 26

Table 4-1. Fecal coliform producer estimated inventory. .... 32

Table 4-2. Fecal coliform delivery ratios..... 34

Table 4-3. Estimated annual fecal coliform load from domestic animals available for potential discharge into surface waters..... 39

Table 4-4. Percent of TMDL project area comprised of clay-rich soils. .... 45

Table 4-5. Estimated indicator bacteria bedloads..... 45

Table 4-6. Estimated annual fecal coliform load from wildlife available ..... 46

Table 4-7. Estimated annual fecal coliform from all sources available for potential discharge into surface waters (MPN/year)..... 47

Table 5-1. TMLD Allocations..... 50

Table 6-1. Source Categories and Implementing parties..... 53

Table 6-2. Proposed monitoring location for assessing TMDL compliance..... 62

Table 6-3. Additional proposed monitoring sites/areas to establish watershed baseline conditions..... 62

## List of Acronyms and Abbreviations

This report contains numerous acronyms and abbreviations. In general, staff wrote an acronym or abbreviation in parentheses following the first time a title or term was used. Staff wrote the acronym/abbreviation in place of that term from that point throughout this report. The following alphabetical list of acronyms/abbreviations used in this report is provided for the convenience of the reader:

CalWater22	CalWater22 is a suite of watershed data developed by the California Interagency Watershed Mapping Committee
CCAMP	Central Coast Ambient Monitoring Program
CIWQS	California Integrated Water Quality System
CFR	Code of Federal Regulations
CFS	Cubic Feet per Second
CFU	Colony Forming Units
CWA	Clean Water Act
DAR	Drainage Area Ratio
DHS	California Department of Health Services
<i>E. coli</i>	Escherichia coli bacteria
FIB	Fecal Indicator Bacteria
FMMP	Farmland Mapping and Monitoring Program
HSG	Hydrologic Soil Group
HUC	Hydrologic Unit Code
LA	Load Allocation
MPN	Most Probable Number
MS4	Municipal Separate Storm Sewer System
NASS	National Agricultural Statistics Service
NCDC	National Climatic Data Center
NOAA	National Oceanic and Atmospheric Administration
NPDES	National Pollutant Discharge Elimination System
NPS	Nonpoint Source
NRCS	Natural Resources Conservation Service
OSDS	Onsite Waste Disposal System
PRISM	Parameter-elevation Regressions on Independent Slopes Model (Oregon State University)
RCD	Resources Conservation District
REC-1	Water Contact Recreation
REC-2	Non-contact Water Recreation
SSURGO	Soil Survey Geographic Database
SWRCB	State Water Resources Control Board (State Board)
TMDL	Total Maximum Daily Load
USDA	United States Department of Agriculture
USEPA	United States Environmental Protection Agency
USGS	United States Geological Survey
Water Board	California Central Coast Regional Water Quality Control Board
WDR	Waste Discharge Requirements
WLA	Waste Load Allocation
WWTP	Waste Water Treatment Plant

## EXECUTIVE SUMMARY

San Lorenzo Creek is located in a 261 square mile watershed in the coast ranges of eastern Monterey County and southern San Benito counties. San Lorenzo Creek is a tributary of the Salinas River; the confluence of the creek with the Salinas River is near King City. San Lorenzo Creek is listed on Central Coast Region's Clean Water Act Section 303(d) List due to impairment by fecal coliform and *E. coli* bacteria. Consequently, water contact recreation beneficial uses are not being protected. Monitoring data from San Lorenzo Creek show elevated fecal bacteria concentrations, which may impair recreational uses of these waters; their tributaries; and/or their downstream receiving water bodies. Any current, potential, or future recreational uses in these water bodies which involve body contact (including but not limited to wading, fishing, etc.) and the possible ingestion of water could be a potential risk to human health because of the increased risk of the ingestion of disease-causing microbes (pathogens).

The following Fecal Indicator Bacteria Total Maximum Daily Load (TMDL) Project Report evaluates fecal indicator bacteria loading in San Lorenzo Creek, evaluates what water bodies are affected by these TMDLs, estimations on where the bacteria are coming from, identifies responsible parties, and presents an implementation plan to reduce pollutants so that the waterbody is no longer impaired.

These TMDLs address the 303(d) listings of impairment due to fecal coliform and *E. coli* in San Lorenzo Creek, WBID number CAR3091800020020103133204.

### **Total Maximum Daily Load (TMDL)**

TMDLs are strategies to ensure attainment of water quality standards. They are implemented through existing regulatory and non-regulatory programs to control pollutant discharges from point sources (e.g., discharges from wastewater treatment plants) and nonpoint sources (e.g., runoff from livestock operations). The term Total Maximum Daily Load is used to describe the maximum amount of a pollutant(s) - in this case, fecal coliform bacteria - that a water body can receive and still meet water quality standards. A TMDL study identifies the probable sources of pollution, establishes the maximum amount of pollution a water body can receive and still meet water quality standards, and allocates that amount of pollution to all probable contributing sources.

The federal Clean Water Act requires every state to evaluate its waterbodies, and maintain a list of waters that are considered "impaired" either because the water exceeds water quality standards or does not achieve its designated use. California's water quality standards designate beneficial uses for each waterbody (e.g., drinking water supply, aquatic life support, recreation, etc) and the scientific criteria to support that use. The California Central Coast Water Board is required under both State Federal Law to protect and regulate beneficial uses of waters of the state. For each water on the Central Coast's "303(d) Impaired Waters List", the California Central Coast Water Board must develop and implement a plan to reduce pollutants so that the waterbody is no longer impaired and can be de-listed.

In the case of this TMDL project, water contact recreation is the most sensitive applicable beneficial use (i.e., most stringent numeric water quality standard). The loading capacity and allocations for this TMDL are therefore equal to the Basin Plan water quality objective (numeric target) for fecal coliform which is protective of all water contact activities. Additionally, this TMDL establishes a loading capacity, allocations, and numeric target for *Escherichia coli* (*E.*



*coli*) equal to USEPA guidance, which is protective of water contact activities. When the numeric water quality objectives for fecal coliform and USEPA guidance for *E. coli* are met, the TMDL is and applicable beneficial uses of the water bodies are considered restored.

The TMDLs established in this TMDL for fecal coliform and *E. coli* are as follows:

#### **Fecal coliform**

*Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200/100mL, nor shall more than ten percent of total samples during any 30-day period exceed 400/100mL.*

#### **E. coli**

*Based on a statistically sufficient number of samples (generally not less than 5 samples equally spaced over a 30-day period), the geometric mean of E. coli densities should not exceed: 126 per 100mL; and no sample should exceed a one sided confidence limit (C.L.) calculated using the following as guidance: lightly used for contact recreation (90% C.L.) = 409 per 100mL (USEPA, 1986)*

### **Impaired Waterbodies**

Based on data from the Water Board's Central Coast Ambient Monitoring Program, San Lorenzo Creek exceeded Basin Plan fecal coliform water quality objectives in the San Lorenzo Creek in 16 out of 29 samples (55%). Additionally, San Lorenzo Creek exceeded USEPA guidance for *E. coli* in 9 out of 15 samples (60%). Therefore, based on the State Water Quality Control Policy (SWRCB, 2004) San Lorenzo Creek is impaired due to fecal coliform and *E. coli*.

### **Sources**

Fecal coliform are shed by all warm-blooded animals including humans, pets, livestock and birds and other wildlife. Sources identified in this TMDL Report include:

<b>Source Category</b>	<b>Land Use Category</b>
Livestock	Rangeland, Pasture
Wildlife	All

### **Numeric Targets**

Fecal coliform is used as an indicator for fecal waste and the potential for pathogens in the water column in this TMDL because the Central Coast Basin Plan explicitly specifies water quality objectives for fecal coliform. This FIB TMDL Report proposes that all waterbodies achieve a level of bacteria concentration that is safe for human contact recreation. The following are current Central Coast Basin Plan standards or USEPA guidance and are used as numeric targets in this FIB TMDL:

#### **Fecal coliform**

*Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200 MPN per 100 mL, nor shall more than 10 percent of samples collected during any 30-day period exceed 400 MPN per 100 mL.*

#### **E. coli**

*Based on a statistically sufficient number of samples (generally not less than 5 samples equally spaced over a 30-day period), the geometric mean of E. coli densities should not exceed: 126 per 100mL; and no sample should exceed a one sided confidence limit (C.L.) calculated using the following as guidance: lightly used for contact recreation (90% C.L.) = 409 per 100mL (USEPA, 1986)*

## Allocations

The table below identifies the allocations assigned to responsible parties and the affected water bodies; this table is also presented and discussed in Section 5.4.

<b>WASTE LOAD ALLOCATIONS</b>			
<b>Waterbody</b>	<b>WBID</b>	<b>Party Responsible for Allocation (Source) NPDES/WDR number</b>	<b>Receiving Water Fecal Coliform (MPN/100mL)</b>
All impaired water bodies <sup>a</sup>	CAR3091800020020103133204	NONE IDENTIFIED	NOT APPLICABLE
<b>LOAD ALLOCATIONS</b>			
<b>Waterbody</b>	<b>WBID</b>	<b>Responsible Party (Source)</b>	<b>Receiving Water Fecal Coliform (MPN/100mL)</b>
All impaired water bodies <sup>a</sup>	CAR3091800020020103133204	Owners/operators of land used for/containing domestic animals/livestock  (Domestic animals/livestock waste)	Allocation-1 Allocation-2
All impaired water bodies <sup>a</sup>	CAR3091800020020103133204	No responsible party  (Natural sources)	Allocation-1 Allocation-2
Wasteload Allocation: None – not applicable.			
Load Allocation – Allocation-1: (Equal to the TMDL for fecal coliform):Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200 MPN/100mL, nor shall more than ten percent of total samples during any 30-day period exceed 400 MPN/100 mL.			
Load Allocation – Allocation-2: (Equal to the TMDL for <i>E. coli</i> ): Based on a statistically sufficient number of samples (generally not less than 5 samples equally spaced over a 30-day period), the geometric mean of <i>E. coli</i> densities should not exceed: 126 per 100mL; and no sample should exceed a one sided confidence limit (C.L.) calculated using the following as guidance: lightly used for contact recreation (90% C.L.) = 409 per 100mL (USEPA, 1986)			

<sup>a</sup> San Lorenzo Creek: all reaches and tributaries of the waterbody to the confluence with the Salinas River

## TMDL Implementation

TMDLs are strategies to restore clean water. Implementation plans specify actions needed to solve the problem, and are required under California Law. Implementation measures aimed at improving water quality are implemented, where appropriate, by responsible parties. A responsible party is an entity or an individual who's operations or property have been identified as a probable source of fecal coliform pollution.

In accordance with the California Impaired Waters policy the Water Board may exercise its independent discretion to certify that a nonregulatory action will correct the impairment if supported by findings in the record. On these occasions the Water Board may not always need to adopt its own implementation program, but may instead rely upon the program adopted by the other entity. When doing so, the Water Board should establish the TMDL via a formal recognition which certifies that Water Board has determined that the other entity's program will comply with the TMDL and attain standards.

While the State Impaired Waters policy recognizes that certification of alternative programs of implementation may be merited as appropriate and as a matter of efficiency, it is important to

emphasize the Water Board retains the authority to commence a regulatory response if an impairment has not been adequately addressed by a non-regulatory action within a specified time period. The Water Board may not indefinitely defer taking necessary action if another entity is not properly addressing a problem. Note that a regulatory response by the Water Board must use the administrative permitting authorities as outlined in the Nonpoint Source Implementation and Enforcement policy (see Section 6.3.3).

Accordingly, staff proposes that the Water Board certify the California Rangeland Water Quality Management Plan (Rangeland Plan) as the mechanism for implementing this TMDL. The Rangeland Plan was accepted by the State Board in 1995 (SWRCB Resolution No. 95-43). It summarizes authorities and mandates for water quality and watershed protection on non-federal rangelands, and specifies a framework for the cooperative development of ranch management strategies for water quality protection. The Rangeland Plan also provides that where beneficial uses of water are impaired or threatened, as determined by the Water Board, ranch owners shall assess and report to the Water Board the impact of their operations on beneficial uses; and show the existence of a viable Rangeland Plan with implementation underway; or schedule an assessment and begin development of a Rangeland Plan.

As such, the implementation process will include the following.

- 1) By five years after final approval of the TMDL, Water Board staff and stakeholders will identify specific sites within the TMDL project area contributing controllable fecal coliform loads to San Lorenzo Creek that need management measures for pathogen control. Problem assessment and planning for management measure implementation on non-federal rangelands will follow the implementation procedures in the California Rangeland Water Quality Management Plan (July 1995).
- 2) By eight years after final approval of the TMDL, depending on progress toward management measure implementation under the 1995 California Rangeland Water Quality Management Plan and the 2000 California Nonpoint Source Plan, staff will consider the need for regulatory action to ensure implementation of management measures to control external sources of fecal coliform loading to San Lorenzo Creek.
- 3) By 12 years from the date the TMDL becomes effective (which is upon approval by the Water Board), management practices will be fully implemented for nonpoint sources of fecal coliform loading and the load the allocations, and therefore the TMDL, will be achieved

Water Board staff will verify implementation of the California Rangeland Water Quality Management Plan via a program of implementation monitoring and water quality monitoring, as described in Section 6.5 of this Project Report.

#### **Timeline to Achieve TMDL**

Staff anticipates that the allocations, and therefore the TMDL, will be achieved 12 years from the date the TMDL becomes effective (which is upon approval by the Water Board). This estimation is in part based on the amount of time necessary to identifying responsible parties of the TMDL. The estimation is also based on the uncertainty of the time required for in-stream water quality improvements resulting from management practices to be realized. Staff anticipates that the full in-stream positive effect of all the management measures will be realized gradually.

The Central Coast Water Board will consider additional requirements, or commence a regulatory response in accordance with the State Nonpoint Source Implementation and Enforcement policy if implementation of management practices do not result in achievement of water quality objectives.

## 1 INTRODUCTION

### 1.1 Clean Water Act Section 303(d) List

Section 303(d) of the federal Clean Water Act requires every state to evaluate its waterbodies, and maintain a list of waters that are considered “impaired” either because the water exceeds water quality standards or does not achieve its designated use. For each water on the Central Coast’s “303(d) Impaired Waters List”, the California Central Coast Water Board must develop and implement a plan to reduce pollutants so that the waterbody is no longer impaired and can be de-listed. Section 303(d) of the Clean Water Act states:

*Each State shall establish for the waters identified in paragraph (1)(A) of this subsection, and in accordance with the priority ranking, the total maximum daily load, for those pollutants which the Administrator identifies under section 1314(a)(2) of this title as suitable for such calculation. Such load shall be established at a level necessary to implement the applicable water quality standards with seasonal variations and a margin of safety which takes into account any lack of knowledge concerning the relationship between effluent limitations and water quality.*


The State complies with this requirement by periodically assessing the conditions of the rivers, lakes and bays and identifying them as “impaired” if they do not meet water quality standards. These waters, and the pollutant or condition causing the impairment, are placed on the 303(d) List of Impaired Waters. In addition to creating this list of waterbodies not meeting water quality standards, the Clean Water Act mandates each state to develop TMDLs for each waterbody listed. The Central Coast Regional Water Quality Control Board is the agency responsible for protecting water quality consistent with the Basin Plan, including developing TMDLs for waterbodies identified as not meeting water quality objectives.

### 1.2 Project Area

The proposed geographic scope of this TMDL (the project area) encompasses 261 square miles of the San Lorenzo Creek watershed (which, in this TMDL project includes hydrologic unit codes 1806000510 {HUC-10 San Lorenzo Creek} and 1806000509 {HUC-10 Lewis Creek}) located in the coast ranges of eastern Monterey County and southern San Benito counties. San Lorenzo Creek is a tributary of the Salinas River; the confluence of the creek with the Salinas River is near King City. The project area<sup>1</sup> includes the watershed area contributing flow to the San Lorenzo Creek, and downstream to the San Lorenzo Creek’s confluence with the Salinas River. Figure 1-1 illustrates the location of the project area.

<sup>1</sup> The terms “project area” and “San Lorenzo Creek watershed” are synonymous in the context of this report, and the terms are therefore used interchangeably.

Figure 1-1. TMDL Project Area – San Lorenzo Creek watershed.

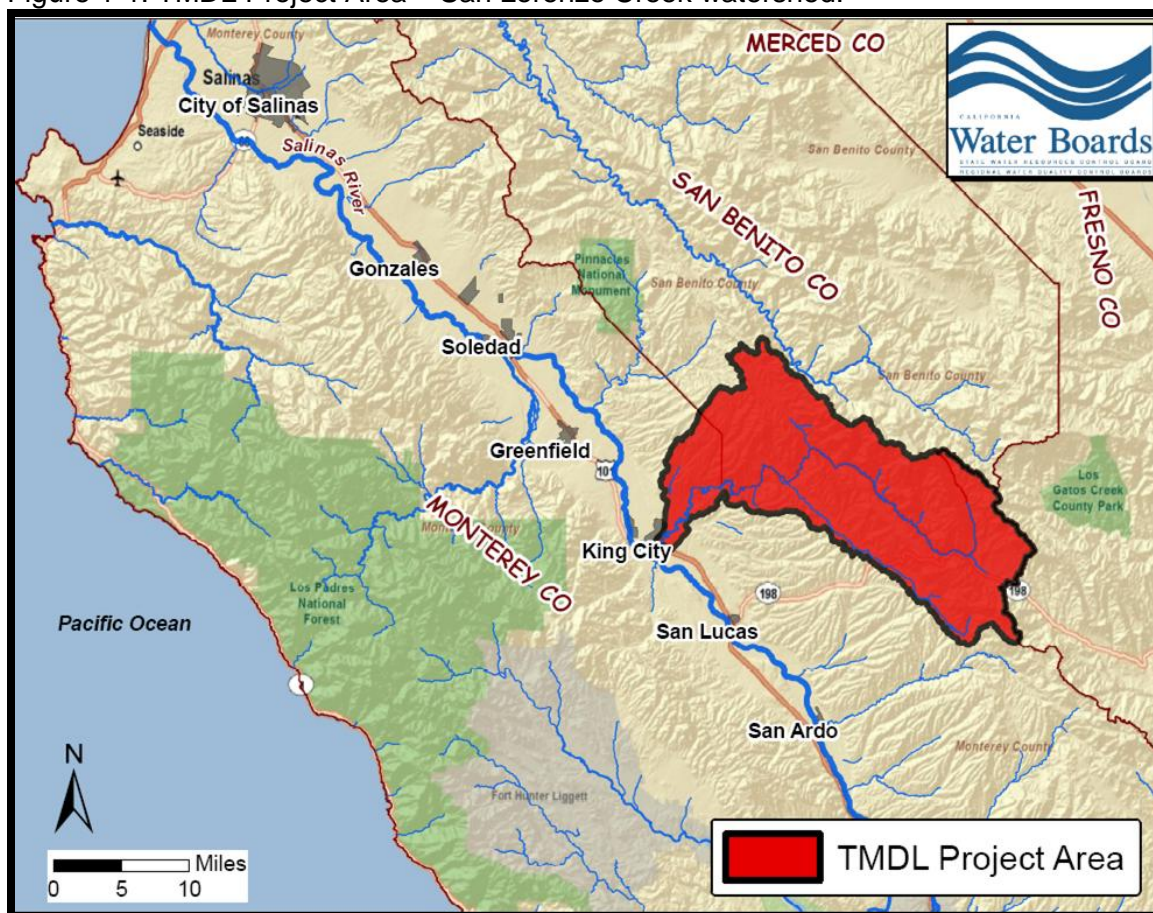

### 1.3 Pollutants Addressed

The pollutant addressed in this TMDL is fecal waste. Pathogenic microbes are associated with fecal waste. Pathogens include viruses, protozoa, and pathogenic strains of bacteria. These microbes can cause a variety of diseases or illnesses (hepatitis, cholera, parasites, diarrhea, etc.) through ingestion of contaminated water or the consumption of contaminated shellfish. The presence of fecal waste in the water column is measured by taking water and analyzing those samples for the concentration of total coliform, fecal coliform and/or *E. coli*. These constituents will collectively be referred to as fecal indicator bacteria or FIB. FIB is used to determine the most probable number of fecal indicator bacteria in the water at a given time. This number is used to determine the risk associated with recreating in this water. Reducing the amount of fecal waste that enters a water body will help to preserve and maintain the beneficial uses.

## 2 PROBLEM IDENTIFICATION

### 2.1 Watershed Description

San Lorenzo Creek is located in a 261 square mile, southeast-northwest trending watershed in the coast ranges of eastern Monterey and southern San Benito counties. San Lorenzo Creek is a tributary of the Salinas River; the confluence of the creek with the Salinas River is near King




City. The San Lorenzo Creek watershed is overwhelmingly in a lightly-populated rural setting within an ecosystem characterized blue oak woodland, chamise-redshank chaparral, and grassland (source: National Land Cover Dataset, 2001; Calif. Dept. of Forestry and Fire Protection, 1977) and minor amounts of cropland, and urban residential areas in the very lowermost reaches of the watershed (source, Calif. Department of Water Resources, 1997)

**2.1.1 Watershed Delineation**

ESRI™ ArcMap® 9.2 was used to create a watershed layer for the project area. The drainage boundaries of the Project Area were delineated on the basis of the Watershed Boundary Dataset, which contain digital hydrologic unit boundary layers organized on the basis of Hydrologic Unit Codes (HUCs). The TMDL project area – the San Lorenzo Creek drainage HUC-10 1806000510 and the Lewis Creek drainage, HUC-10 1806000509 – encompasses 261 square miles of eastern Monterey County and southern San Benito County<sup>2</sup>. Figure 2-1 illustrates a relief map of San Lorenzo Creek watershed, and the subwatersheds nested within it.

Figure 2-1. Project Area relief map and subwatersheds.

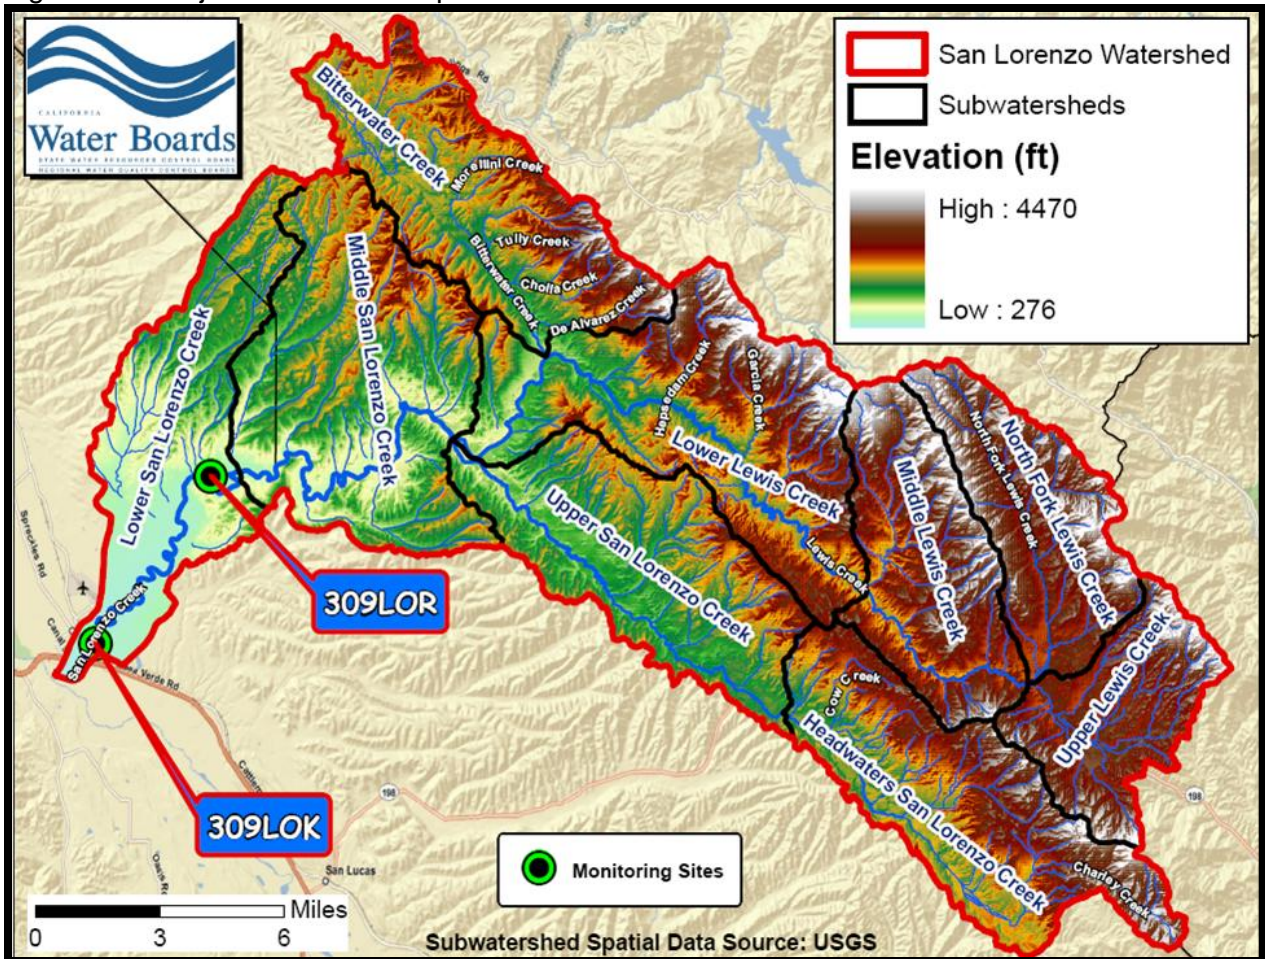

<sup>2</sup> The San Lorenzo Creek drainage, HUC-10 1806000510 and the Lewis Creek drainage, HUC-10 1806000509 are collectively identified as the “San Lorenzo Creek watershed” in this TMDL project.

### **2.1.2 Land Use and Land Cover**

Land use and land cover in the project area can be evaluated from digital data provided by the California Department of Conservation Farmland Mapping and Monitoring Program (FMMP). The FMMP digital land use dataset was compiled by the California Dept. of Conservation, in cooperation with the California Cattlemen's Association and others. For this Project Report, the 2008 FMMP mapping data for Monterey and San Luis Obispo counties were used. Figure 2-2 illustrates land use and land cover in the project area. Table 2-1 tabulates the distribution of land use in the project area.

It is worth noting with regard to spatial data and census data used throughout this Project Report that these types of datasets are widely used in TMDL studies for scoping purposes and are not intended or required to accurately represent the full range of local conditions or site-specific real time conditions.



Figure 2-2. Land Use – Land Cover in San Lorenzo Creek watershed (source: FMMP, 2008).

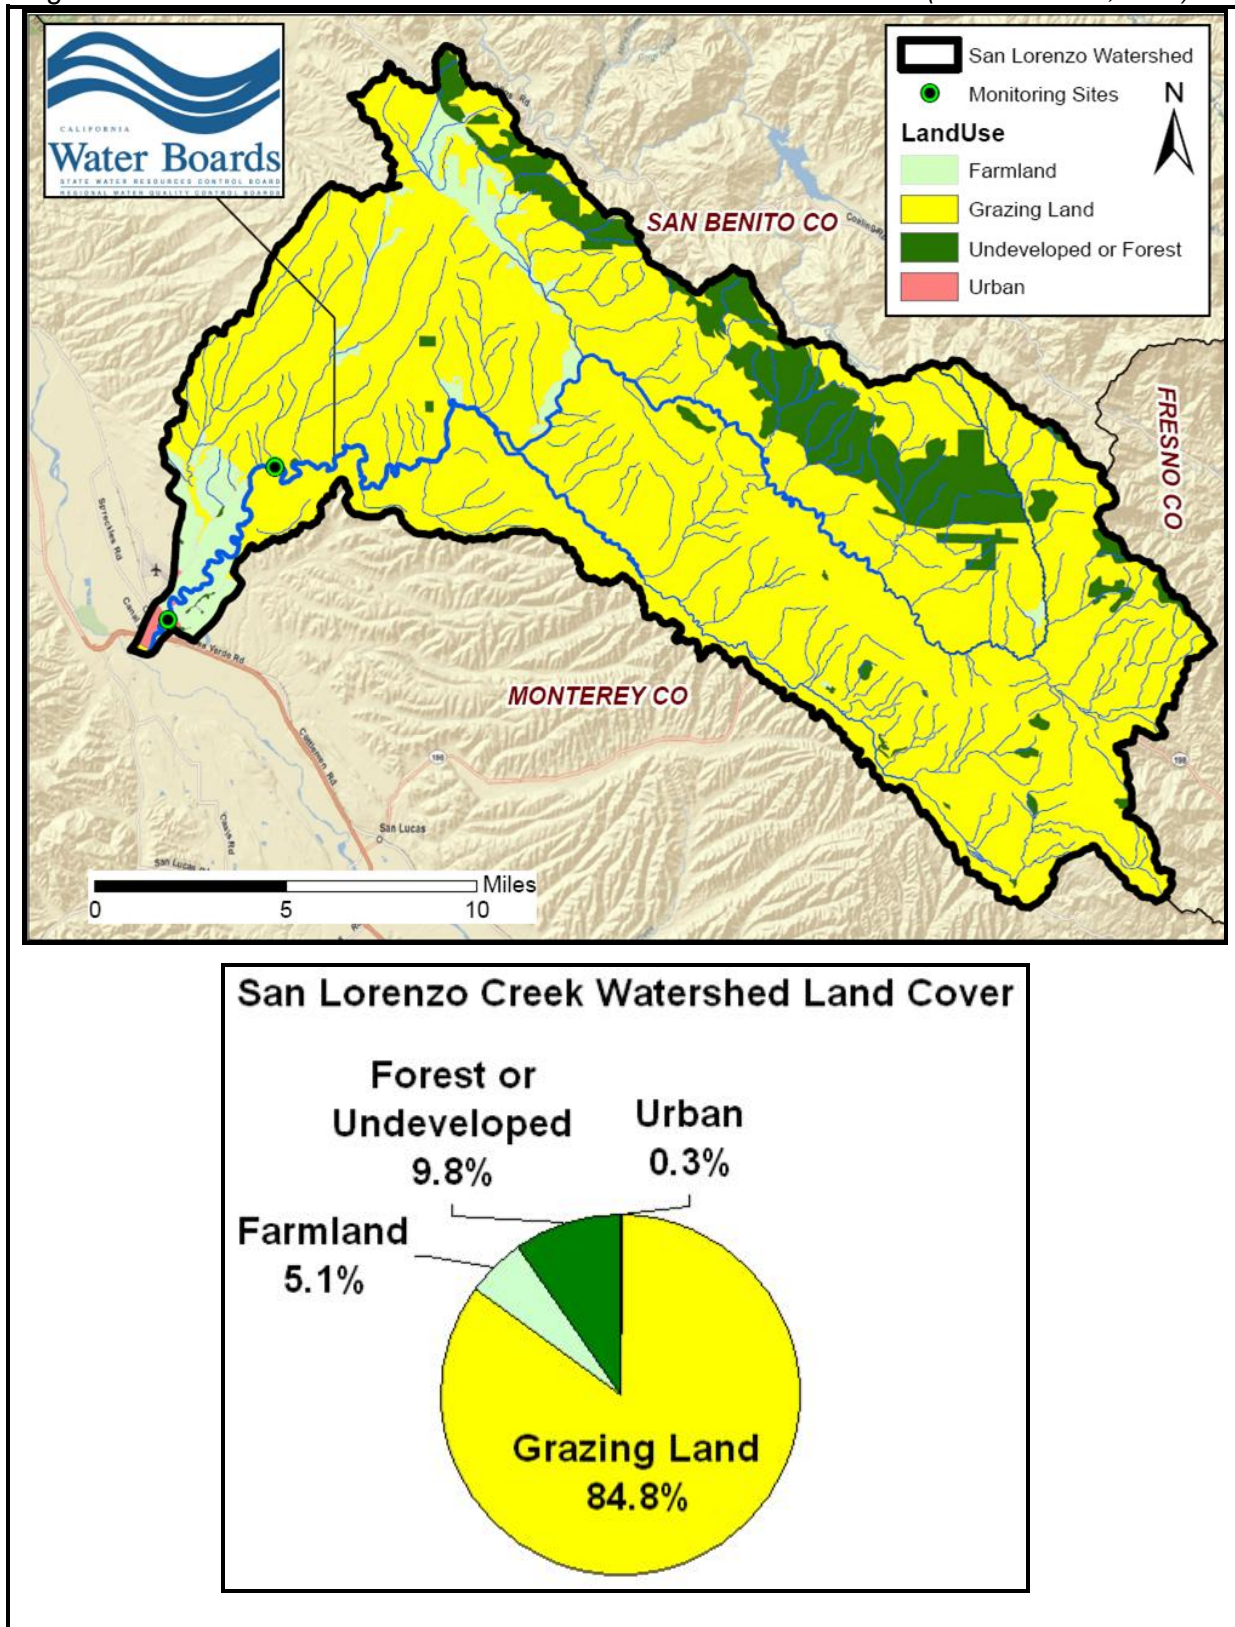


Table 2-1. Tabulation of San Lorenzo Creek watershed land use / land cover.

Land Use/Land Cover	Acres	% of Project Area
Residential	439	0.3%
Grazing Land	141549	84.8%
Farmland	8539	5.1%
Forest or Undeveloped	16316	9.8%
<b>Total</b>	<b>166,843</b>	<b>100%</b>

### 2.1.3 Hydrology

California central coast streams tend to have flashy hydrologic conditions with short durations of high flows following precipitation events, followed by long, extended periods of low or no flows. Figure 2-3 illustrates mean monthly flow in San Lorenzo Creek (1991 to 2009) measured at USGS flow gage 11151300 located at Bitterwater Road.

Figure 2-4 illustrates the hydrologic stream channel classifications in the project area. The source of these hydrologic classification attributes is from the USGS’s high resolution National Hydrography Dataset (NHD).

Figure 2-3. Mean monthly flows, San Lorenzo Creek at USGS flow gage.


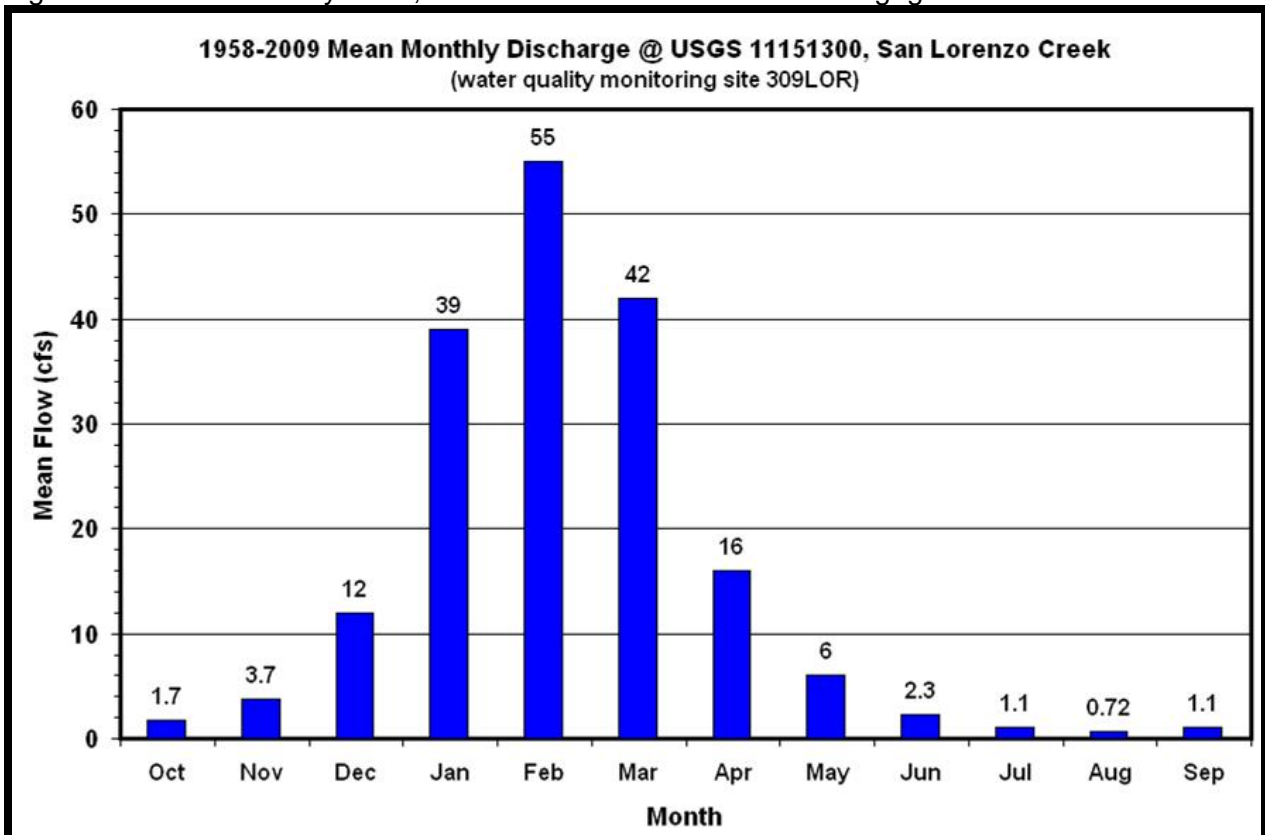




Figure 2-4. Flow conditions in the San Lorenzo Creek watershed (source: USGS-NHD).

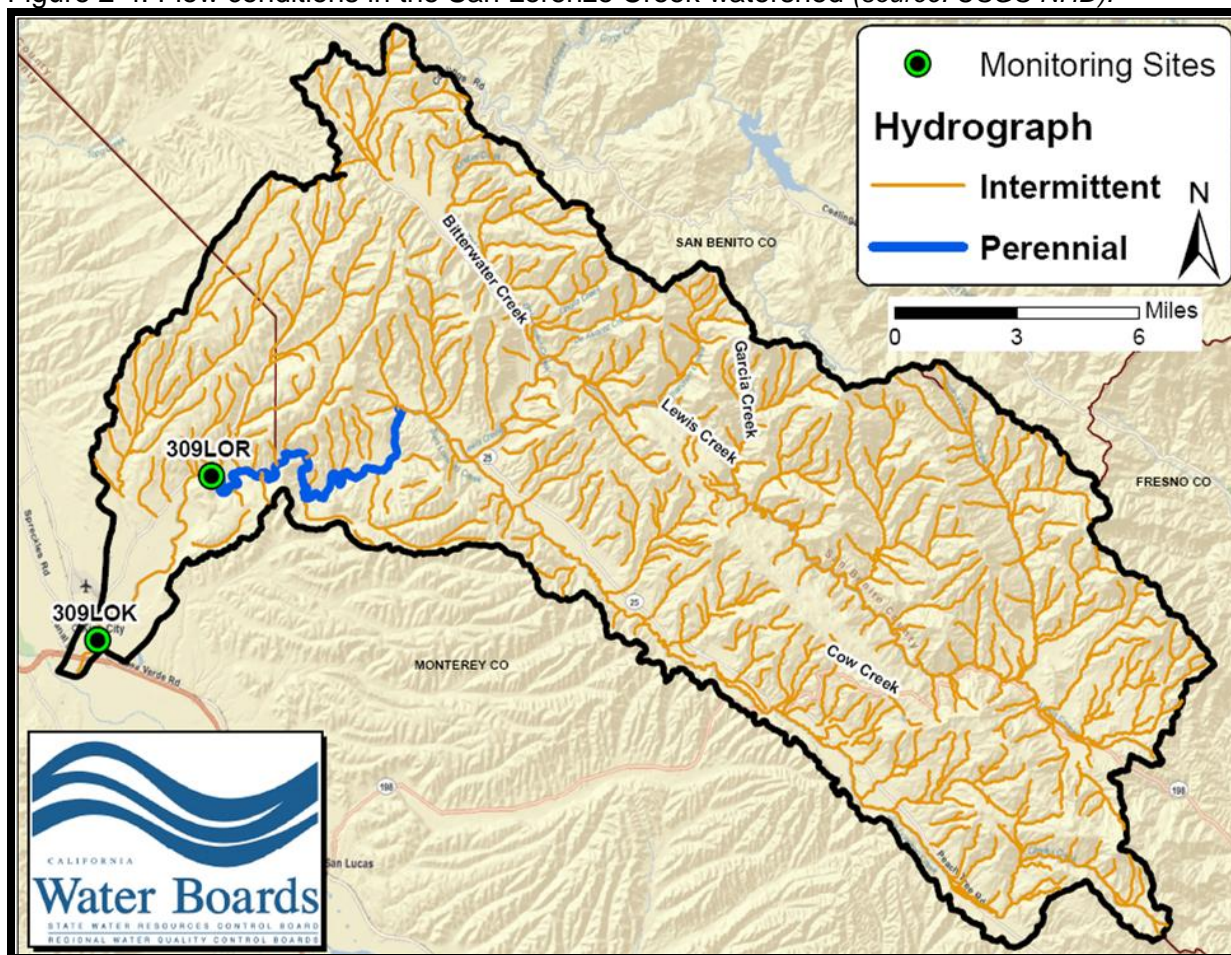

In central coast streams, pathogen loading in ephemeral or intermittent drainages is typically limited to the wet season or to precipitation events. Nonetheless, it is also important to recognize that indicator bacteria (e.g., *E. coli*) or pathogens in manure that are deposited on grasses or in ephemeral stream beds may survive for weeks or months (Guan and Holley, 2003; Avery et al., 2004), potentially being mobilized in the water column by subsequent stream flows.

#### **2.1.4 Climate and Precipitation**

The San Lorenzo Creek watershed has a dry, Mediterranean climate, with the vast majority of precipitation falling between November and April. Precipitation gage data in the vicinity of the project area is available from the National Oceanographic and Atmospheric Administration - Western Regional Climate Center (<http://www.wrcc.dri.edu>). As shown in Table 2-3 the mean annual precipitation for National Climatic Data Center (NCDC) climate station 044555 and 047150, located near King City, and Priest Valley, respectively, range from 11.24 to 20.64 inches per year (for location of NCDC climate station see Appendix C: *Supplemental Maps and Spatial Data*).

Table 2-2. Precipitation record for NCDC weather stations 044555 and 047150.

<b>NCDC Weather Station 044555– King City, CA</b>													
<b>Period of Record: June. 1902 to Sept. 2010</b>													
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
Average Total Precipitation (in.)	2.47	2.32	1.97	0.79	0.25	0.06	0.01	0.02	0.14	0.45	0.98	1.79	11.24
<b>NCDC Weather Station 047150 – Priest Valley, CA</b>													
<b>Period of Record: Dec. 1903 to Aug. 2010</b>													
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	Annual
Average Total Precipitation (in.)	4.52	4.06	3.42	1.47	0.57	0.08	0.03	0.05	0.27	0.82	1.85	3.51	20.64

It is important to recognize that rainfall gauging stations have limited spatial distribution, and that gauging stations tend to be located in urban areas or valley floor areas. Consequently, these locations can bias estimates of regional rainfall towards climatic conditions at lower elevations. The topography of the California central coast region however, can result in significant orographic enhancement of rainfall (i.e., enhancement of rainfall due to topographic relief and mountainous terrain).

Therefore, mean annual precipitation estimates for the project are a may be assessed using the Parameter-elevation Regressions on Independent Slopes Model (PRISM) (<http://prism.oregonstate.edu/>). PRISM is a climate mapping system that accounts for orographic climatic effects and is widely used in watershed studies and TMDL projects to make projections of precipitation into rural or mountainous areas where rain gage data is often absent, or sparse. An isohyetal map for estimated mean annual precipitation in the San Lorenzo Creek watershed based on PRISM data is presented in Appendix C: .

### **2.1.5 Geology and Soils**

Soils and rocks have physical and hydrologic characteristics which may have a significant influence on the transport and fate of pollutants. For pathogen TMDLs, geology and soils information may be important in terms of assessing the potential risk of OSDS (i.e., septic tanks) effluent transport through bedrock fractures, the risk of pollutant wash-off associated with poorly-drained or relatively impermeable soils, or the potential for sediment-associated bacteria loads.

Digital data for California geology is available from the California Department of Conservation, Division of Mines and Geology. The digital database contains the geologic units and faults as shown on the Geologic Map of California by Charles W. Jennings published in 1977. Soil surveys for Monterey County are compiled by the U.S. Department of Agriculture National Resources Conservation Service (NRCS) and are available via the Soil Survey Geographic (SSURGO) Database. The distribution of geology and of hydrologic soil groups in the Project Area along with a tabular description of the soil group's hydrologic properties is presented in Appendix C: *Supplemental Maps and Spatial Data*.


### **2.1.6 Demographics**

To estimate the potential contribution of human fecal material (for example, failing septic systems) to surface water pathogen impairments, it is necessary to have watershed-specific demographic data on the number of people, households, and septic systems in the project area. Section 4.1 provides detail on the sources of census data that are used to establish these estimates. Figure 2-5 presents the estimated population distribution in the watershed. As



indicated in the figure, the San Lorenzo Creek watershed is overwhelmingly a rural setting with a relatively small human population. The vast majority of people reside in the very lowermost reach of the watershed in King City, which is located downstream of monitoring sites 309LOR and 309LOK.

Figure 2-5. Census Block Data.

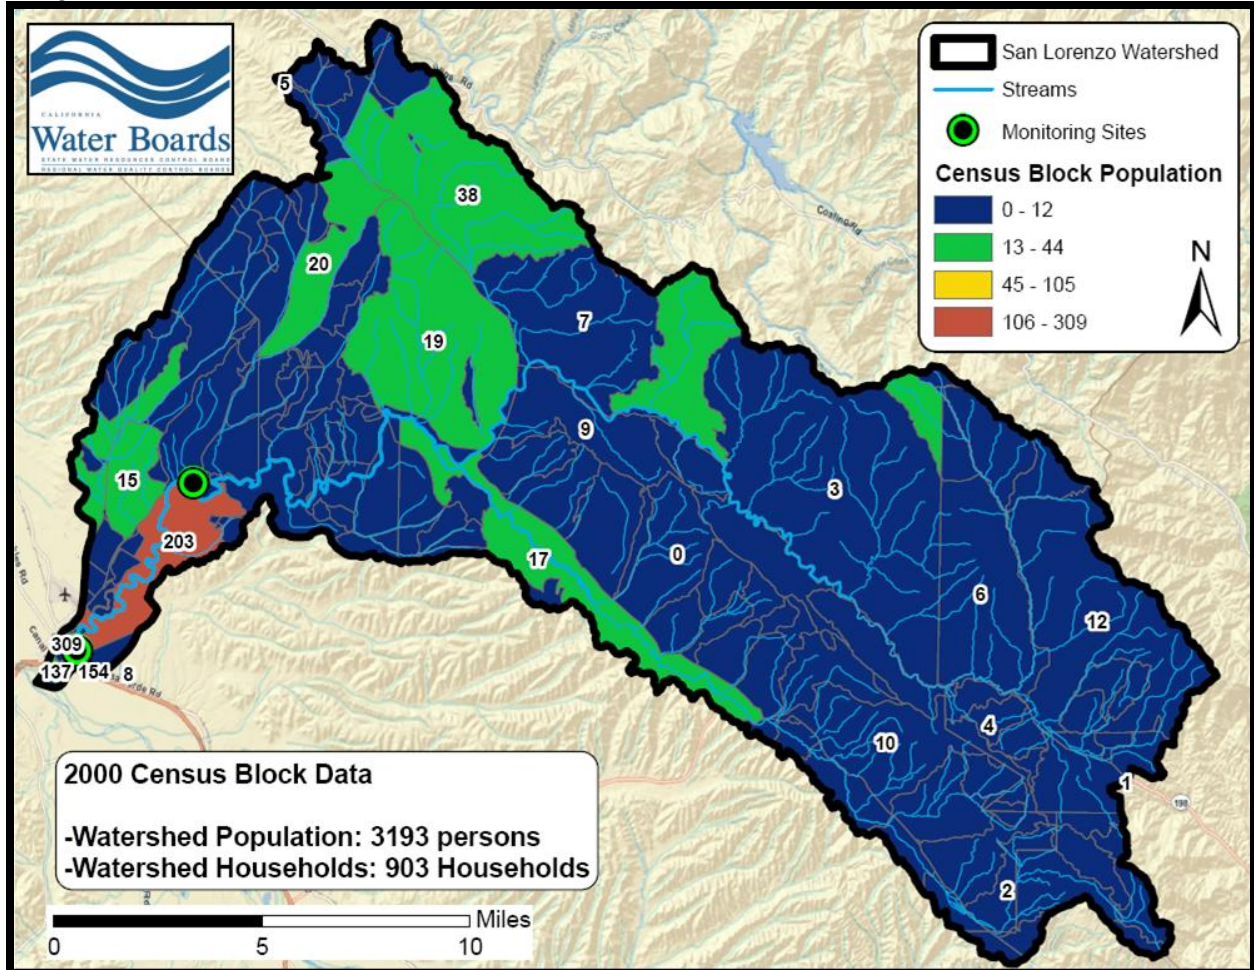

## 2.2 Beneficial Uses

California’s water quality standards designate beneficial uses for each waterbody (e.g., drinking water supply, aquatic life support, recreation, etc) and the scientific criteria to support that use. The California Central Coast Water Board is required under both State Federal Law to protect and regulate beneficial uses of waters of the state. In the case of this TMDL project, water contact recreation (REC-1) is the most sensitive water recreation use, i.e. more stringent numeric water quality objectives for fecal indicator bacteria. The REC-1 beneficial use states:

*“Uses of water for recreational activities involving body contact with water, where ingestion of water is reasonably possible. These uses include, but are not limited to, swimming, wading, water-skiing, skin and scuba diving, surfing, white water activities, fishing, or use of natural hot springs.”*

Table 2-3 shows the current beneficial use designations for major water bodies in the Project area.

Table 2-3. Beneficial uses of San Lorenzo Creek.

Beneficial Use	San Lorenzo Creek
MUN	X
AGR	X
PRO	
IND	
GWR	X
REC1	X
REC2	X
WILD	X
COLD	
WARM	X
MIGR	
SPWN	X
BIOL	
RARE	
EST	
FRESH	
COMM	X
SHELL	

MUN: Municipal and domestic water supply.

AGR: Agricultural supply.

PRO: Industrial process supply.

IND: Industrial service supply

GWR: Ground water recharge.

REC1: Water contact recreation.

REC2: Non-Contact water recreation.

WILD: Wildlife habitat.

COLD: Cold fresh water habitat.

WARM: Warm fresh water habitat

MIGR: Migration of aquatic organisms.

SPWN: Spawning, reproduction, and/or early development.

BIOL: Preservation of biological habitats of special significance.

RARE: Rare, threatened, or endangered species

EST: Estuarine habitat

FRESH: Freshwater replenishment.

COMM: Commercial and sport fishing.

SHELL: Shellfish harvesting.

## 2.3 Water Quality Objectives and Criteria

The Central Coast Region's Water Quality Control Plan (Basin Plan) contains specific water quality objectives that apply to indicator bacteria (CCRWQCB, 1994, pg. III-3). These objectives are linked to specific beneficial uses and include:

### 2.3.1 Shellfish Harvesting (SHELL):

Please note: The San Lorenzo Creek and its tributaries are not designated for the SHELL beneficial use; as such the SHELL water quality objective for fecal coliform does not apply in this TMDL project.

### **2.3.2 Water Contact Recreation (REC-1):**

Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200 per 100ml, nor shall more than 10% of total samples during any 30-day period exceed 400 per 100ml.

### **2.3.3 Non-Contact Water Recreation (REC-2):**

Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 2000 per 100ml, nor shall more than 10% of samples collected during any 30-day period exceed 4000 per 100ml.

### **2.3.4 Controllable Water Quality conditions**

Controllable water quality must conform to the water quality objectives stated in the Basin Plan. The Basin Plan defines controllable water quality conditions as:

*“Controllable water quality conditions are those actions or circumstances resulting from man’s activities that may influence the quality of the waters of the State and that may be reasonably controlled.”*

## **2.4 Data Analysis**

The data used for this Project included water quality data from the Central Coast Ambient Monitoring Program. CCAMP is the Central Coast Water Board's regionally scaled water quality monitoring and assessment program. The CCAMP dataset used for this project ranged in time from two sampling cycles: February 1999 to February 2000 and January 2006 to February 2007.

In the case of this TMDL project, contact recreation (REC-1) is the most sensitive applicable beneficial use. The REC-1 water quality objective is therefore protective of all designated beneficial uses of San Lorenzo Creek pertaining to indicator bacteria. Accordingly, the water quality objective to assess impairment status for this TMDL project is equal to the REC-1 water quality objective (numeric target) for fecal coliform. The Basin Plan’s water quality objective for waters designated for REC-1 is:

*“Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200 per 100ml, nor shall more than 10% of total samples during any 30-day period exceed 400 per 100ml.”*

Available datasets often do not contain five samples in a 30-day period, so the portion of the objective that is evaluated is that “no more than ten percent of total samples during any 30-day period exceed 400/100 mL.” In instances where fewer than five samples were collected in 30 days, the “ten percent” threshold is exceeded if any one sample exceeds 400/100 mL.

### **2.4.1 Water Quality Impairments**

The California Listing Policy (SWRCB, 2004) provides standards for interpreting data and information as they are compared to beneficial uses and existing numeric and narrative water quality objectives. In the absence of a site-specific exceedance frequency (e.g., five samples in a 30-day period), a water segment shall be placed on the section 303(d) list if bacteria water quality objectives are exceeded at the frequencies and sample sizes indicated in Table 2-4.

Table 2-4. Data required to assert impairment (source: SWRCB, 2004).

Sample Size	Number of Exceedances <sup>1</sup> needed to assert impairment
5-30	5
31-36	6
37-42	7
43-48	8
49-54	9
55-60	10
61-66	11
67-72	12
73-78	13
79-84	14
85-91	15
92-97	16
98-103	17
104-109	18
110-115	19
116-121	20

<sup>1</sup> Equal to or greater than 400 MPN/100 ml fecal coliform.

Recent monitoring data collected in San Lorenzo Creek measures *Escherichia coli* indicator bacteria. *Escherichia coli* (*E. coli*) is one species within the broader category of fecal coliform bacteria. *E. coli* data was collected by CCAMP in the 2006-07 monitoring cycle of San Lorenzo Creek. Table 2-5 summarizes USEPA recommended bacterial water quality criteria for the protection of human health in recreational waters.

Table 2-5. USEPA recommended criteria for *E. coli*.

Indicator	Risk Level	Geometric Mean Density (per 100 mL)	Single Sample Maximum Allowable Density (per 100 mL) <sup>a</sup>			
			Designated Beach Area (75 <sup>th</sup> percentile)	Moderate Full Body Contact Recreation (82 <sup>nd</sup> percentile)	Lightly Used Full Body Contact Recreation (90 <sup>th</sup> percentile)	Infrequently Used Full Body Contact Recreation (95 <sup>th</sup> percentile)
<i>E. coli</i>	8	126 <sup>b</sup>	235	298	409	575

Source: U.S. EPA (1986).

a. Calculated using the following: single sample maximum = geometric mean \* 10<sup>^(confidence level factor \* log standard deviation)</sup>, where the confidence level factor is: 75%: 0.675; 82%: 0.935; 90%: 1.28; 95%: 1.65. The log standard deviation from EPA's epidemiological studies is 0.4 for fresh waters.

b. Calculated to nearest whole number using equation: geometric mean = antilog<sub>10</sub> [(risk level + 11.74) / 9.40].

USEPA recommends that California use USEPA's Ambient Water Quality Criteria for Bacteria (1986) when there is no adopted *E. coli* standard (USEPA, 2010). Specifically, USEPA recommends that for REC1 uses the following criteria be used:

Steady state geometric mean indicator density - 126 indicator densities/100ml  
 Designated beach area (upper 75% confidence limit) - 235 indicator densities/100ml (EPA, 1986, Table 4, pp.15)

Additionally, USEPA has provided guidance in using the recommended *E. coli* criteria to evaluate whether water bodies are impaired (Mary Adams, Central Coast Water Board, December 2007, personal communication). USEPA recommends using the concentration of 235 MPN/100mL as a benchmark, with the number of exceedances of 235 MPN/100mL needed to assert impairment increasing with the number of available data. Note from Table 2-4 that at least five data and exceedances are required to assert impairment. Accordingly, Table 2-6



summarizes the number and percent of samples that exceeded water quality criteria for fecal coliform and *E. coli* in San Lorenzo Creek.

Table 2-6. Fecal Indicator Bacteria samples exceeding water quality objectives.

Waterbody – Monitoring Site	Fecal Coliform Exceedances	
	Number of Samples Exceeding 400 MPN/100mL	% of Samples Exceeding 400 MPN/100mL
San Lorenzo Creek @ 309LOR	11 of 23	48%
San Lorenzo Creek @ 309LOK	5 of 6	83%
<b>Total</b> – All San Lorenzo Creek Fecal Coliform Data	16 of 29	55%
Waterbody – Monitoring Site	<i>E. Coli</i> Exceedances	
	Number of Samples Exceeding 235 MPN/100mL	% of Samples Exceeding 235 MPN/100mL
San Lorenzo Creek @ 309LOR	6 of 11	55%
San Lorenzo Creek @ 309LOK	3 of 4	75%
<b>Total</b> – All San Lorenzo Creek <i>E. Coli</i> Data	9 of 15	60%

Figure 2-6 presents a statistical summary of the water quality data for all fecal indicator data from San Lorenzo Creek. The box and whiskers plot for monitoring site 309LOR illustrates a statistical representation of the data and indicates that the nature of the fecal coliform impairment is qualitatively moderate.

Figure 2-6. Statistical summary of fecal indicator bacteria water quality data.

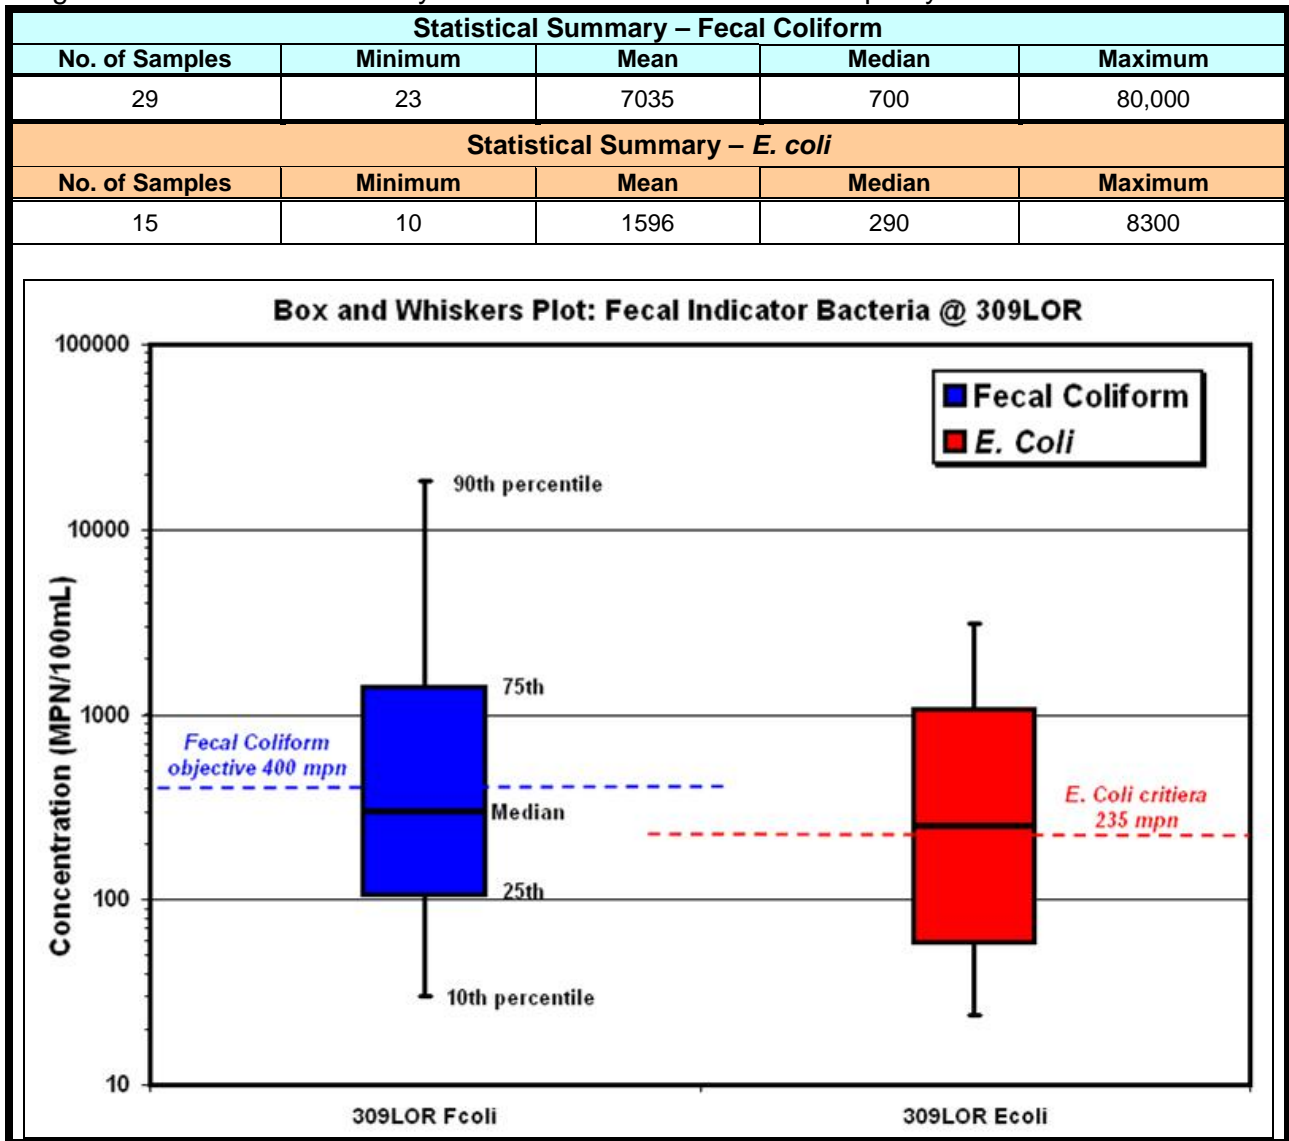


Table 2-7 presents staff’s conclusions regarding impairment status. San Lorenzo Creek is confirmed by staff as an impaired water body due to fecal coliform and *e. coli* indicator bacteria, and is also currently listed as impaired on the 2010 303(d) list.


Table 2-7. Confirmed impaired waterbodies.

Waterbody	Waterbody Identification (WBID)	Exceeding a water quality objective or recommended level?	Water quality objective or USEPA criteria exceeded?		Currently listed on 303(d) list?
			Fecal Coliform	<i>E. Coli</i>	
San Lorenzo Creek	CAR3091800020020103133204	YES	YES	YES	YES

### 2.4.2 Water Quality Temporal Trends

Figure 2-7 illustrates a temporal plot of fecal indicator bacteria water quality data from monitoring sites 309LOR and 309LOR. Qualitatively, based on this limited dataset, the magnitude of the fecal coliform impairment does not appear to have changed substantially between the two monitoring cycles.


Figure 2-7. Temporal plot of fecal indicator bacteria data.

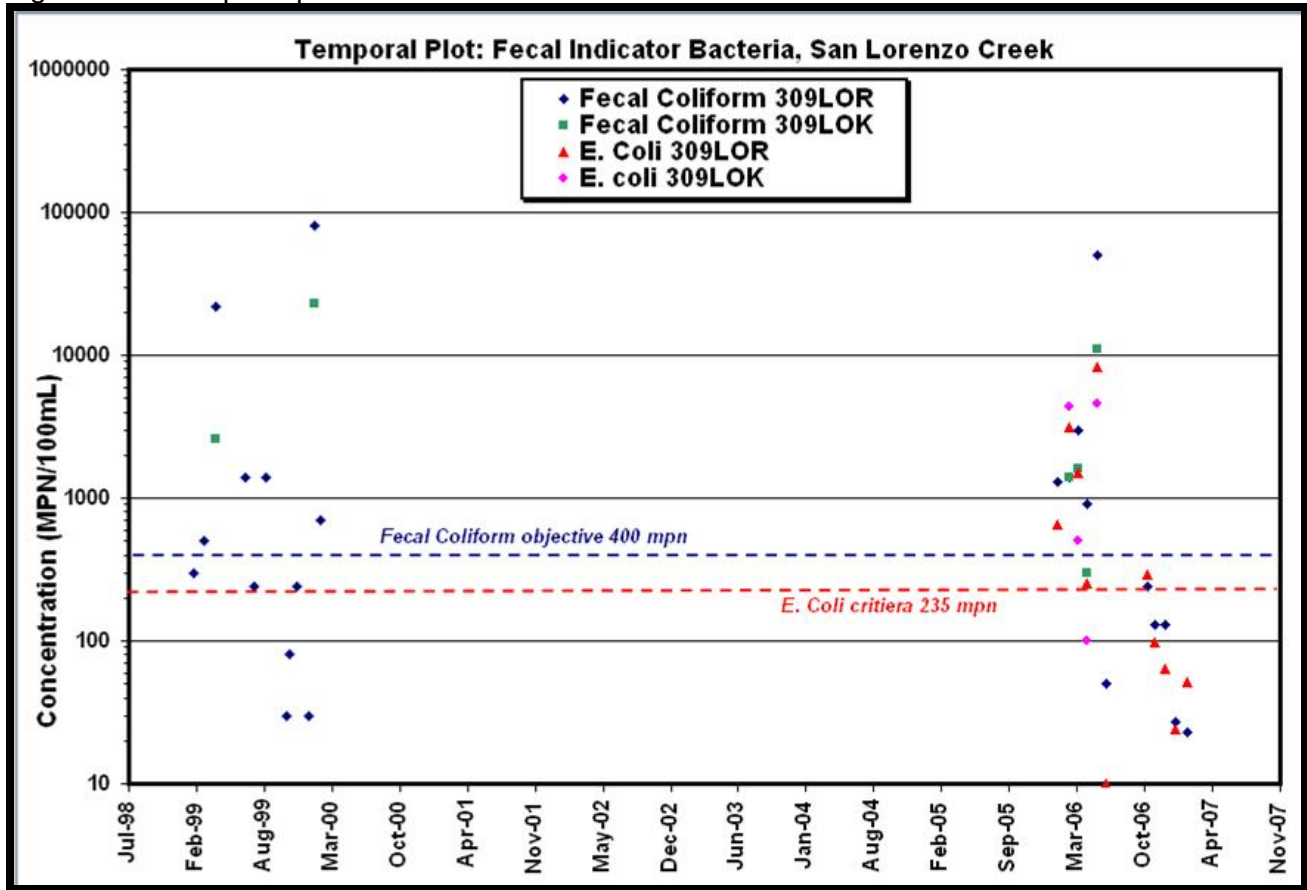

### 2.4.3 Spatial Trends at Water Quality Monitoring Sites

There are two water quality monitoring sites on San Lorenzo Creek: 309LOR (located at creek mile 1) and 309LOR (at creek mile 9) – see Figure 2-8. 309LOR is the most upstream site and captures drainage overwhelmingly from rangeland and grazing lands (refer back to Figure 2-2). 309LOR is in the lowermost reaches of the watershed, and in addition to capturing grazing lands drainage from upstream, also captures drainage from surrounding cropland, pasture, and vineyard areas (Figure 2-8). Note that 309LOR is at the upstream boundary of King City, and as such, evidently only captures nominal or negligible amounts of urban residential drainage (Figure 2-8).

Figure 2-8. Water Quality Monitoring Sites.

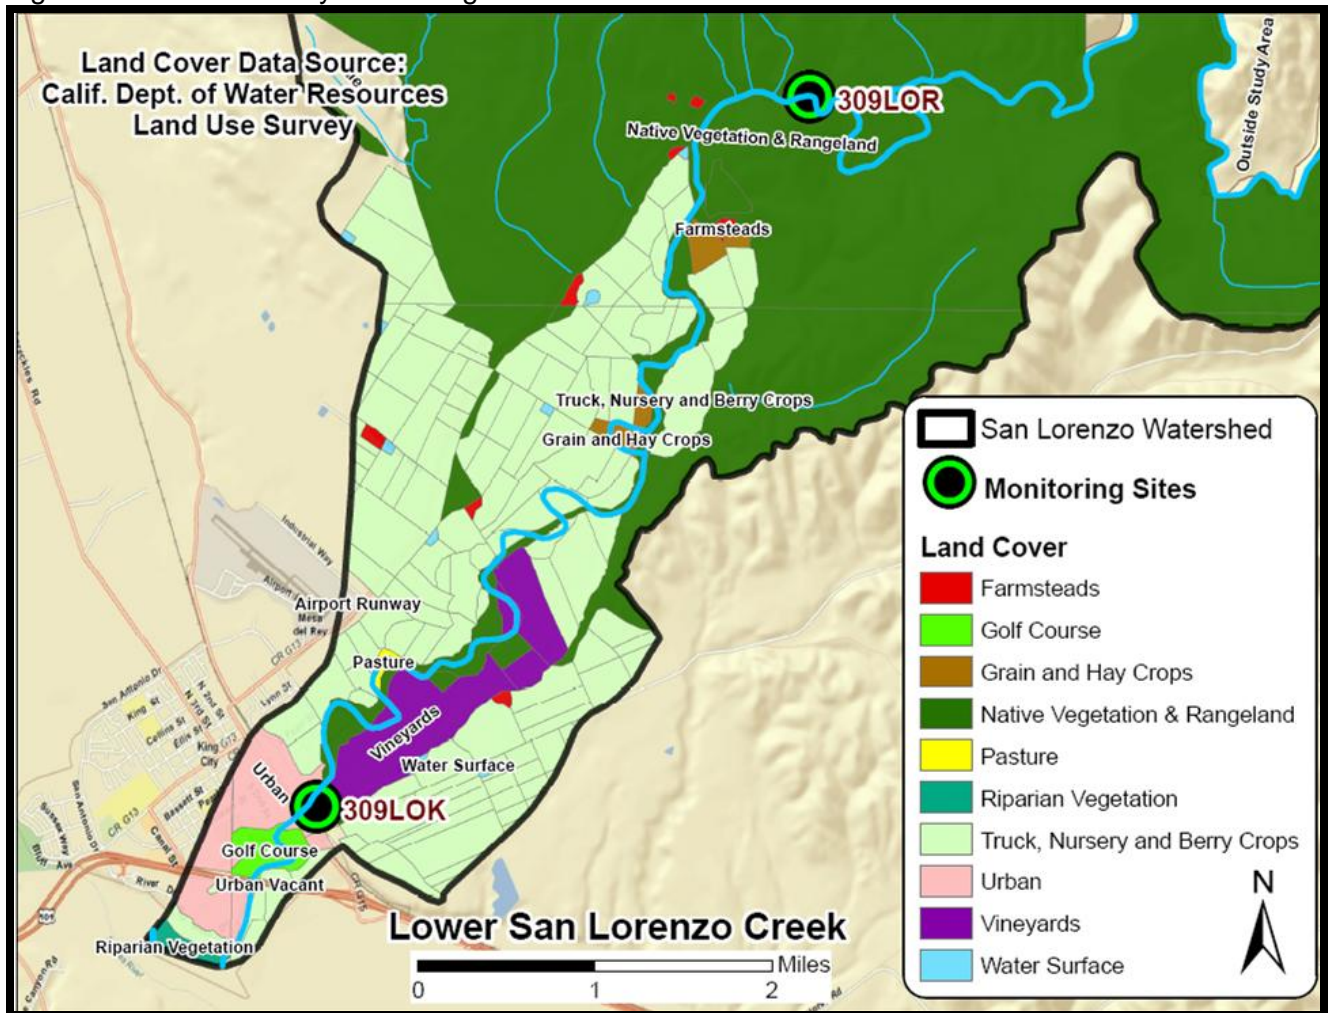

A cursory look at water quality objective exceedance data at both monitoring sites would appear to suggest that the magnitude of impairment by indicator bacteria at site 309LOK (creek mile 1) is more significant than at 309LOR (creek mile 9) – (for example, refer back to Table 2-6). However, it is important to recognize that 1) 309LOK has a limited number of samples; 2) 309LOK is a dry, ephemeral channels only generating flows during precipitation events (refer back to Figure 2-4); and 3) 309LOK is only in hydrologic communication with upstream site 309LOR during wet weather and precipitation events.

As such, staff evaluated precipitation data and water quality data from both monitoring sites to assess the temporal and spatial nature of water quality exceedances at both locations. As illustrated in Figure 2-9, precipitation data and an evaluation of paired water quality data (samples collected from both monitoring sites on the same dates) confirms that samples collected from the ephemeral channel reach at 309LOK are associated with precipitation-driven events.

Figure 2-9. Analysis of Paired Water Quality Data from 309LOR and 309LOK.

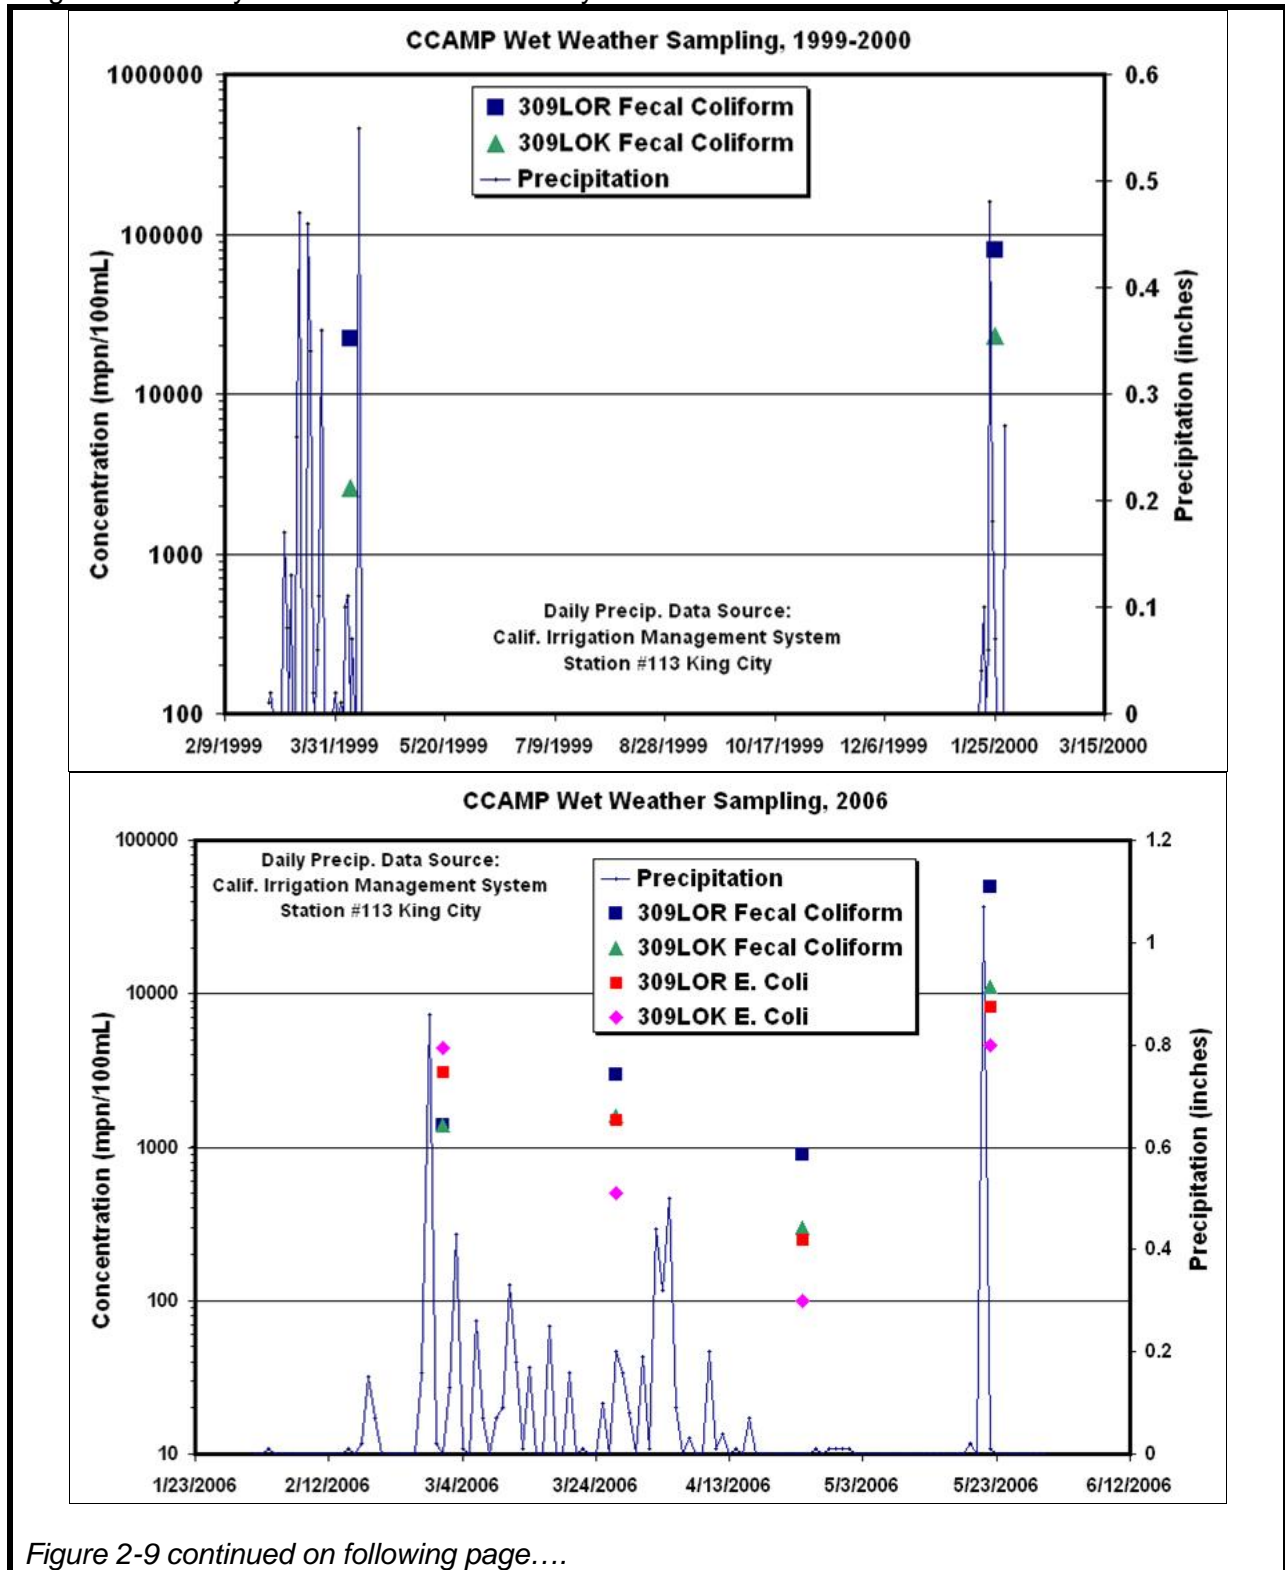


Figure 2-9 continued on following page....





### 3 NUMERIC TARGETS

The Basin Plan contains fecal coliform water quality objectives. These water quality objectives are in place to protect the water contact recreational beneficial use. In addition, monitoring data for *E. coli* can be used to evaluate whether the fecal coliform objective is being met in the subject water bodies (USEPA, 2010).

The Basin Plan water quality objective for fecal coliform, and thus the fecal coliform numeric target used to develop the TMDLs for the San Lorenzo Creek watershed is:

#### **Fecal coliform**

*Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200 MPN per 100 mL, nor shall more than 10 percent of samples collected during any 30-day period exceed 400 MPN per 100 mL.*

In addition, USEPA has recommended that California use USEPA's Ambient Water Quality Criteria for Bacteria (1986) when there is no adopted *E. coli* standard. The USEPA freshwater guidance for *E. coli*, (USEPA, 1986), and thus the *E. coli* numeric target used to develop the TMDLs for the San Lorenzo Creek watershed is:

#### **E. coli**

*Based on a statistically sufficient number of samples (generally not less than 5 samples equally spaced over a 30-day period), the geometric mean of E. coli densities should not exceed: 126 per 100mL; and no sample should exceed a one sided confidence limit (C.L.) calculated using the following as guidance: lightly used for contact recreation (90% C.L.) = 409 per 100mL (USEPA, 1986)*

Available datasets often do not contain five samples in a 30-day period, so the portion of the objective that is evaluated is that “no more than ten percent of total samples during any 30-day period exceed 400/100 mL.” In instances where fewer than five samples were collected in 30 days, the “ten percent” threshold is exceeded if any one sample exceeds 400/100 mL.

### 4 SOURCE ANALYSIS

#### 4.1 Inventory of Fecal Coliform Producers

Fecal coliforms are produced by all warm-blooded animals. The first step in this source analysis is to compile population estimates and fecal coliform produced by each animal type in the San Lorenzo Creek watershed.

Table 4-1 summarizes the inventory of major producers (humans, pets, livestock, and wildlife) of fecal coliform in the project area. The methodologies used in compiling these inventories are described in Appendix D: *Fecal Coliform Producer Inventory Data*. The goal of compiling an inventory is ultimately to assess the potential relative magnitudes of contributions of non-controllable (natural background) loads, and controllable (anthropomorphic) loads to waterbodies.

It is important to emphasize that there is uncertainty in these population estimates; they are approximations based on census statistics and estimated wildlife population densities. It is not practical or possible to precisely quantify project area-specific populations of humans, wildlife

and livestock in most pathogen TMDL projects. However, these approximations are based on widely accepted methodologies that have been previously used in numerous USEPA and State-approved pathogen TMDLs.

Table 4-1. Fecal coliform producer estimated inventory.

Category	Sub-Category	Estimated Population	Source of Population Estimate <sup>A</sup>	Fecal Coliform produced per individual/day (cfu) <sup>B</sup>
Livestock	Cattle	3486	USDA Census of Agriculture (2007)	3.3 E+10
	Horses	83	American Horse Council Federation and rural housing data from U.S. Census Bureau	4.20E+08
	Sheep	364	USDA Census of Agriculture (2007)	1.2 E+10
	Goats	222	USDA Census of Agriculture (2007)	Assume equal to sheep
	Hogs	37	USDA Census of Agriculture (2007)	1.1 E+10
	Chicken	748	USDA Census of Agriculture (2007)	1.40E+08
Humans	OSDS	1022	U.S. Census Bureau 1990 & 2000 Decennial Census	2.0 E+09
	Sewered	2171		
Pets	Dogs	571	AMVA Pet Ownership Statistics (2007)	4.50E+08
	Cats	644	AMVA Pet Ownership Statistics (2007)	4.50E+08
Wildlife	Deer	1664	California Dept. Fish and Game	3.5 E+08
	Feral Pig	499	California Dept. Fish and Game	1.1 E+10
	Coyotes	166	Gese et al. (1989); Babb et al. (1989)	4.50E+08
	Raccoons	676	California Dept. Fish and Game	5.0 E+07
	Opossum	376	Kissell and Kennedy (1992)	Assume equal to Raccoon
	Skunk	511	Ontario Ministry of Natural Resources (1987)	2.50E+07 Muskrat value, assume skunk=muskrat
	Wild Turkey	2052	California Dept. Fish and Game	9.3 E+07
	Duck (peak season)	228	Estimated from California Det. of Fish and Game (2008)	2.40E+09
	Geese	23	Assume = approx. 10% of Duck population, based on Calif. DFG Waterfowl Hunt Results Report (2007), which indicates Geese harvest is typically around 10% of Duck harvest <sup>3</sup>	8.00E+08
	Pheasant <sup>3</sup>	6157	California Dept Water Resources-IEP	Assume equal to turkey
	Other wildlife	Reliable estimates of numbers for other wildlife were not available. To attempt to account for the fecal coliform bacteria that would be produced by other wildlife, an equivalency to all deer in the project area was assumed.		Assume equivalency to all deer in project area.


A - Citations and Links to Sources of Population Estimates: see Appendix D: *Fecal Coliform Producer Inventory Data* – B – References for fecal coliform production, see Appendix F: *Bacteria Source Load Calculator (BSLC) Spreadsheets*

<sup>3</sup> Staff recognizes that the pheasant population for the project area is likely grossly overestimated; staff recognizes that indeed there may be few pheasants in the project area. Staff reviewed California Department of Fish and Game reports, which indicated that pheasant populations on the central coast reportedly are limited to scattered and isolated areas. However, staff reasoned that pheasant populations should be included for Project Area wildlife estimates for two primary reasons: 1) California Department of Fish and Game habitat and range maps indicate that pheasant do indeed range in the project area; and 2) Due to the lack of fecal coliform production and population density information for other bird species, staff reasoned that including a pheasant population would serve as a plausible surrogate in an attempt to account for amounts of fecal coliform that would be produced by other bird species.



Figure 4-1 shows the relative proportion of fecal coliform production by animal source group. It is important to note, that Figure 4-1 represent the total amount of fecal coliform produced, not the amount delivered to surface waters. The estimates of the proportion of fecal coliforms potentially delivered to surface waters will be developed in subsequent sections of this TMDL project report.

Figure 4-1. Estimated fecal coliform production (%)

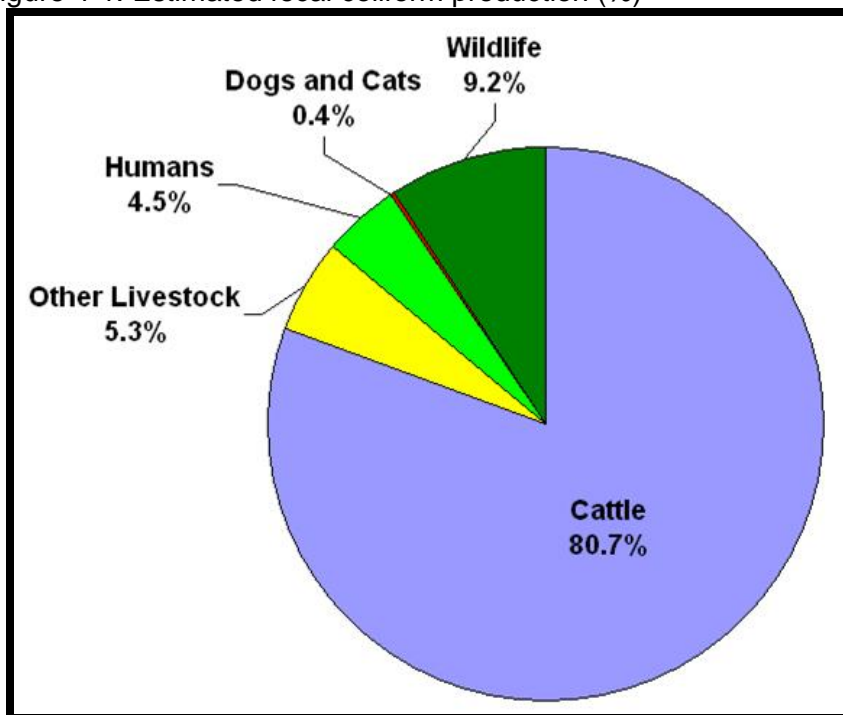

To estimate the relative proportion of FIB delivered to surface waters from the various fecal coliform sources in the project area a spreadsheet tool, and some simplifying assumptions were used to assess potential load contributions.

The load to land and load to stream contribution of fecal coliform nonpoint sources were estimated with the Bacteria Source Load Calculator (BSLC) spreadsheet, available from the Virginia Tech University Center for TMDL Studies. BSLC characterizes how bacterial loads are spatially and temporally distributed in the watershed from user input, and processes the source data to calculate 1) non-point source fecal coliform loads to land; and 2) fecal coliform loads to stream from direct in-stream deposition. The BSLC spreadsheet calculations and input parameters are included in Appendix F: *Bacteria Source Load Calculator (BSLC) Spreadsheets*. BSLC itself does not simulate die-off once bacteria reach the land surface. However, attenuation of bacteria prior to runoff into streams was incorporated by comparing the fecal coliform totals deposited on land, to reasonable area loading rates found in published literature (Horner, 1992 as reported in Shaver et al., 2007; New Jersey Dept. of Environmental Protection, 2008).

Accordingly, staff approximated attenuation of fecal coliform prior to discharge into surface waters by using delivery ratios previously developed in the Central Coast Water Board's Total Maximum Daily Load for Fecal Coliform for the Lower Salinas River Watershed project report (Central Coast Water Board, 2010). Estimated delivery ratios of pollutants to receiving surface waters are a commonly used methodology to approximate attenuation of pollutants deposited

on land and subject to distance attenuation, die off, and/or filtering prior to discharging to the surface waterbody (for example, Watershed Treatment Model, 2002; Minnesota Pollution Control Agency, 2002; Minnesota State University, 2007).

As such, for the San Lorenzo Creek project area the fractional amount of total fecal coliform potentially discharged to surface water is estimated by multiplying the total fecal coliform produced from sources in the BSLC spreadsheets by the estimated delivery ratio shown in Table 4-2. The results of the BSLC calculations are shown in Appendix F: *Bacteria Source Load Calculator (BSLC) Spreadsheets*.

Table 4-2. Fecal coliform delivery ratios.

<b>Land Use / Source Category</b>	<b><u>Delivery Ratio</u>: % of Total Fecal Coliform <u>Potentially</u> Available for Runoff/Discharge to Surface Water</b>
<b>Crops</b>	<b>5%</b>
<b>Pasture Grassland Rangeland</b>	<b>0.1%</b>
<b>Forest</b>	<b>0.7%</b>
<b>Direct In-Stream Defecation</b>	<b>100%*</b>

\* livestock/wildlife defecation into a stream is assumed to have a 100% delivery ratio, because all fecal coliforms are discharged directly into the surface water body, with no opportunity for attenuation.


The delivery potential ratios in Table 4-2 should be considered gross screening-level approximations of the “averaged” fractional amounts of fecal material potentially available for delivery to surface waters. This is an important distinction, because there remains substantial uncertainty about the exact relationship between FIB loads observed in overland runoff, and the water column FIB loads observed in streams. In many reported studies, it is not clear whether the monitored overland flow ultimately discharges to a waterway or simply infiltrates into the soil at some point down the hill slope. The uncertainty associated with delivery hinders quantification of the overland flow contribution to FIB loading of streams (Collins, et al. 2005).

## 4.2 Point Sources

### 4.2.1 NPDES-Permitted Facility Discharges to Surface Waters

There are no NPDES-permitted facilities discharging to surface waters in or near the San Lorenzo Creek Watershed (see Figure 4-2). As such, no wasteload allocations are developed for these source categories.

Figure 4-2. NPDES-permitted discharges to surface waters.

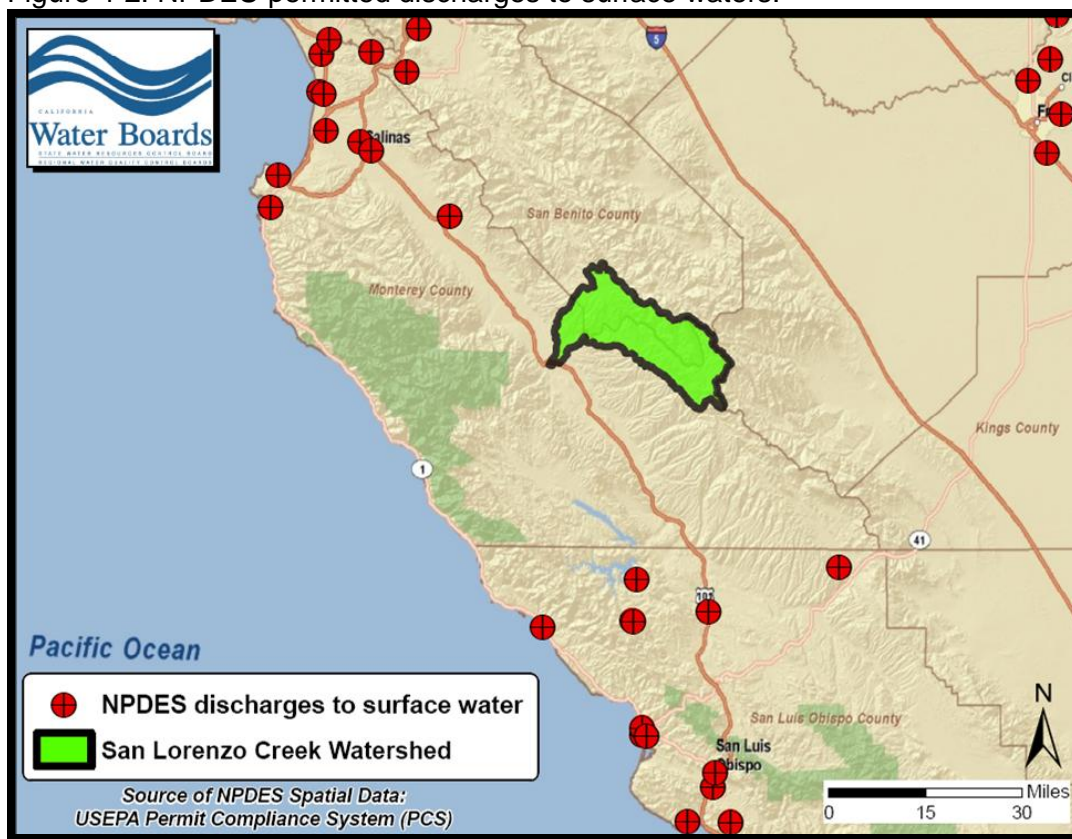


#### 4.2.2 Sanitary Sewer Collection and Treatment Systems

Discharges from sanitary sewer collection and treatment system point sources can be a significant source of anthropogenic indicator bacteria loads to surface waters (USEPA, 1999). Note that the King City wastewater treatment plant (WWTP) is not located in the San Lorenzo Creek Watershed (see Figure 4-3), additionally the WWTP does not discharge to surface waters; the WWTP discharges to land (primary and secondary ponds).

However parts of King City and its associated sewage collection system are located within the San Lorenzo Creek watershed. Therefore, staff evaluated spill and sanitary sewer overflow (SSO) reporting for the King City sewage collection system to assess the potential for indicator bacteria loads to San Lorenzo Creek from this source. Spill and SSO reporting is available via the California Integrated Water Quality System (CIWQS). Based on CIWQS data, the record of spills and sanitary sewer overflows in King City from 2001 to 2009 indicates the spills did not result in discharges to any surface waters or storm drain pipes, and the responses to the spills indicate they were evidently abated and/or cleaned up in relatively short order (see Appendix E: *CIWQS Data: Spills and Sanitary Sewer Overflows*). Consequently, based on the information available it does not appear to be plausible that fecal indicator bacteria impairments in San Lorenzo Creek are related to spills and leaks from sanitary sewer collection and treatments systems. As such no wasteload allocations are developed for these source categories.

Figure 4-3. King City wastewater treatment plant facilities.

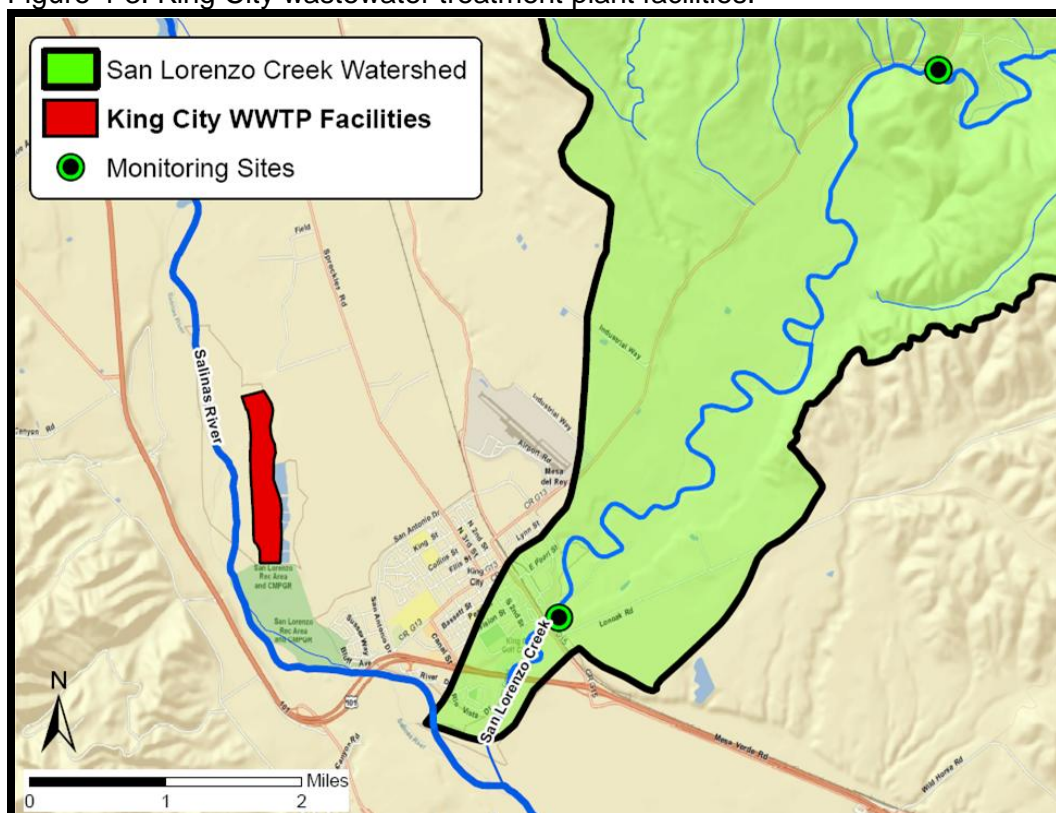

### 4.2.3 MS4 Storm Water Entities


Based on GIS spatial analysis, approximately 435 acres of King City's NPDES-permitted Municipal Separate Storm Sewer System (MS4) area are located within the San Lorenzo Creek watershed (see Figure 4-4) which constitutes only about 0.3% of the watershed's total drainage area. As such, only the very lowermost reaches of San Lorenzo Creek (downstream of creek mile 1) receive urban runoff. USEPA guidance includes permitted storm-water discharges (MS4s) as point source discharges and therefore potentially subject to a waste load allocation (USEPA, 2002). The City of King (King City) has been designated by the Water Board as a regulated Small MS4. Accordingly, the City of King has developed a Storm Water Management Plan which was approved by the Water Board's Executive Officer on July 20, 2009. The City is required to implement its Storm Water Management Plan in accordance with NPDES General Permit for the Discharge of Storm Water from Small Municipal Separate Storm Sewer Systems, Order No. 2003-0005-DWQ (General Permit). The City's Storm Water Management Plan reportedly focuses on control of sediment and bacteria runoff, since urban runoff would affect these pollutants (City of King, 2010).

It is important to recognize that the location of San Lorenzo Creek water quality monitoring stations at creek mile 9 (309LOR) and at creek mile 1 (309LOK) do not appear to capture significant amounts of drainage associated with urban MS4 runoff (see Figure 4-4). Monitoring site 309LOR is located approximately eight miles upstream of King City; site 309LOK is located near the upstream boundary of the MS4 permitted area east of 1<sup>st</sup> street. The majority of storm drain outfalls for King City are located well downstream of site 309LOK; three storm drain outfalls are located west of 1<sup>st</sup> street; one outfall is located at 1<sup>st</sup> street near 309LOK (personal



communication, Sal Morales, City of King, Feb. 1, 2011). As a general matter of sampling protocol, Water Board CCAMP staff attempt to sample upstream or at distance from culverts and drains in an attempt to collect samples representative of ambient drainage coming from upstream of the monitoring site rather than samples representing effluent or direct point source discharges. As such, water quality samples from monitoring site 309LOK are evidently capturing only nominal to negligible amounts of MS4 urban storm water effluent.

Figure 4-4. King City MS4 area and vicinity.

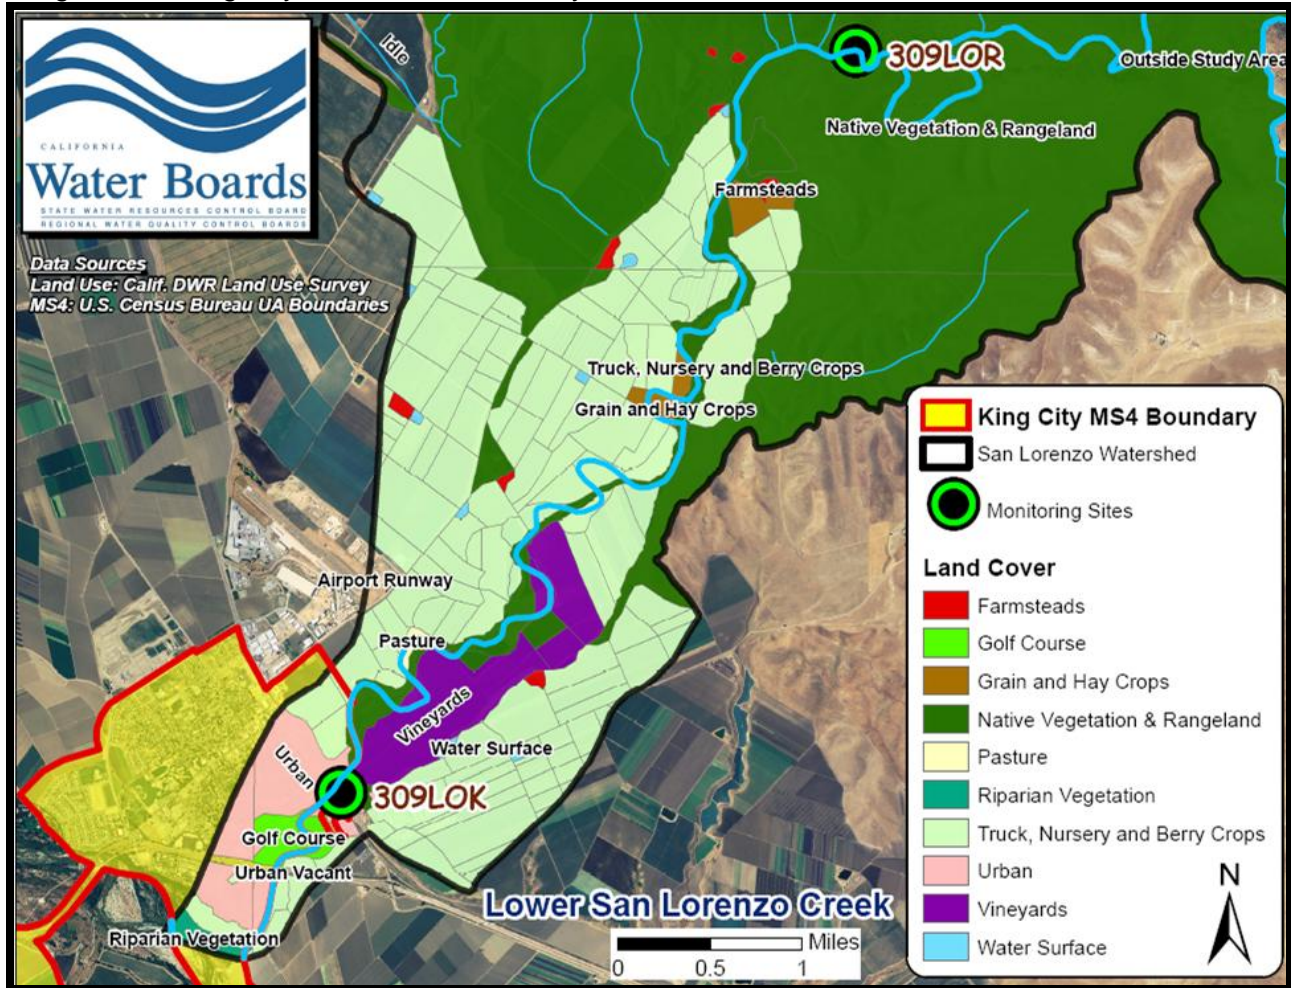

Land use directly upstream of 309LOK (creek mile 1 to creek mile 5) is predominantly cropland, vineyard, and minor amounts of industrial area and residential housing (source: Calif. Department of Water Resources Land Use Survey; City of King General Plan). Note also that San Lorenzo Creek at creek mile 1 (monitoring site 309LOK) is a dry channel that only conveys runoff during wet weather and/or precipitation events; as such monitoring data from 309LOK is limited to wet season sampling. The water quality dataset at 309LOK is limited to four samples for *E. coli* and 6 samples for fecal coliform.

It is also noteworthy that paired monitoring data (i.e., water quality data collected from monitoring sites 309LOR and 309LOK on the same dates) indicate that indicator bacteria densities (concentrations) are attenuated downstream during wet season flows occurring between creek mile 9 (309LOR) and creek mile 1 (309LOK) – (refer back to Section 2.4.3 and to Figure 2-9). Note that 309LOR receives predominantly rangeland and grazing lands drainage

prior to flowing through cropland, vineyard, and minor amounts of residential/industrial areas before reaching 309LOK at creek mile 1 (see Figure 4-4). Based on the available data, this appears to indicate that the intervening croplands, vineyards and minor amounts of industrial/residential areas between 309LOR and 309LOK are not substantially contributing to or magnifying the impairment. Therefore, at this time based on the available data staff maintains that indicator bacteria loading and impairment of the creek is largely associated with sources in upstream reaches of the watershed, upgradient of the MS4 area.

However, since both monitoring sites 309LOR and 309LOK show impairment of water quality standards the SWRCB and USEPA added the entire reach of San Lorenzo Creek to the 303(d) Impaired Waters list. Nonetheless, note that USEPA guidance states that although an entire stream segment can remain 303(d)-listed as impaired, during TMDL development the TMDL can be aimed to address the appropriate portion of the segment (USEPA, 2010). In accordance with this guidance, and based on the information presented above, staff maintain that controllable sources of indicator bacteria as measured at sites 309LOR and 309LOK are largely associated with loading occurring well upstream of creek mile 1 (309LOK) and therefore upstream of the MS4 permit area. Presently, water quality monitoring data are not available to allow staff to establish the MS4 source contribution to indicator bacteria impairment of the 303(d)-listed San Lorenzo Creek downstream of creek mile 1 (monitoring site 309LOK).

Therefore, at this time wasteload allocations are not presented for the MS4 source category in this TMDL project report. In accordance with USEPA guidance staff are addressing the sources of fecal indicator bacteria impairment that are clearly originating upstream of monitoring site 309LOK (creek mile 1). To the extent MS4 runoff is contributing to creek impairment, these discharges are limited to the very lowermost reaches of San Lorenzo Creek (i.e., approximately creek mile 1 downstream to the confluence with the Salinas River). As noted previously, the City of King is currently regulated for storm water runoff and is required to implement its Storm Water Management Plan in accordance with the NPDES General Permit Order including implementation of management practices to control indicator bacteria runoff (City of King, 2010).

Further, note that State TMDL policy provides that TMDLs may be developed without sufficient information to develop a complete implementation approach, and that TMDL implementation can be developed consistent with an adaptive approach (SWRCB, 2005); additionally as noted above USEPA guidance states that during TMDL development of a listed waterbody the TMDL can be aimed to “address the appropriate portion of the segment” (USEPA, 2010) As such, Staff recommend more information or baseline water quality monitoring will be obtained during the implementation phase of the TMDL to assess and establish the scope of indicator bacteria contribution to stream reaches receiving MS4 discharges, and to identify any actions if necessary to reduce loading. Accordingly, staff recommend that additional water quality monitoring of the lowermost reaches of San Lorenzo Creek (below creek mile 1 to the confluence with the Salinas River)) by the City of King be required by the Water Board during TMDL implementation, pursuant to Section 13267 of the Water Code or other relevant administrative authorities.

## **4.3 Nonpoint Sources**

---

### **4.3.1 Grazing Operations**

Livestock such as cattle, goats, and horses spend most of their time grazing on pasture or rangeland. It has been well established that grazing livestock can be a significant, diffuse source of fecal coliform loads to surface waters (Baxter-Potter and Gilliland, 1988; Rosen, 2000).

Runoff from rainfall washes some of the manure deposited in the pastures into drainage features and nearby surface water bodies. Additionally, cattle and other animals are often allowed access to streams and ponds. Direct manure deposition may occur when cattle cross a stream, or through sporadic incursions into the stream channel for water or shade. Fecal material deposited directly into surface waterbodies may be a significant source of fecal coliform loads, in addition to the surface runoff from rangeland or pasture.

It is important to note that Staff acknowledges the work done by California Cattleman's Association, the Central Coast Rangeland Coalition, the Monterey County Cattlemen's Association, Conservation Districts, Natural Resource Conservation Districts, University of California Cooperative Extension, and rangeland managers within the Central Coast region. These entities have provided and attended educational courses, provided research and funding assistance to rangeland managers, and have reportedly implemented rangeland management practices to improve water quality. The California Cattlemen's Association has developed a draft Nonpoint Source Grazing management strategy, containing information and strategies to manage pollutant loads from lands with domestic animals. In spite of some water quality issues associated with rangeland, staff acknowledges that it is widely accepted among many resource professionals that well-managed rangeland in California's central coast region can have significant ecological and land use benefits overall.

Grazing lands comprise the overwhelming majority of land use in the San Lorenzo Creek watershed. 85% of the land cover supports grazing lands, according to the 2008 FFMP land cover data set (see Section 2). The FMMP land cover is a digital dataset depicting the location and extent of grazing lands, and is compiled by the California Department of Conservation, in cooperation with the California Cattlemen's Association and the University of California Cooperative Extension.

Water Board staff have routinely observed evidence of grazing cattle in the around San Lorenzo Creek at and downstream of monitoring site 309LOR, including observations of cow manure and cattle in the creek and along creek banks (personal communication, Erin Sanderson, CCRWQCB Dec. 1, 2010; Mary Adams, CCRWQCB Dec. 17, 2010) – refer to Appendix A: *Water Quality Data and Field Notes*. The aforementioned observations indicate that cattle manure is a probable source of fecal indicator bacteria loads to San Lorenzo Creek.

Using the BSLC spreadsheet tool, and delivery assumptions outlined in Section 4.1, the estimated annual potential load to San Lorenzo Creek from domestic animals is shown in Table 4-3. The total amount of fecal coliform available for potential discharge is obtained by multiplying the total amount of livestock fecal coliform deposited to pasture/rangeland or stream (from BLSC spreadsheets), and multiplying it by the delivery potential (%) shown in Table 4-2.

Table 4-3. Estimated annual fecal coliform load from domestic animals available for potential discharge into surface waters.

Subwatershed	Domestic Animal Fecal Coliform Available for Potential Discharge (MPN/year)		Total Fecal Coliform Available
	Pasture/Rangeland	Direct In-stream Defecation	
San Lorenzo Creek watershed	5.71E+13	2.31E+14	<b>2.88E+14</b>

Given the information presented above, staff concludes that livestock and other domestic animals are probable source categories of indicator bacteria in surface waters of the project area. As such, this source category is assigned a load allocation in this TMDL. Actions to control these sources are included in the Implementation Section.

### **4.3.2 Confined Animal Operations**

Animal waste associated with confined animal operations (feedlots, dairies, etc.) can constitute a potential significant source of fecal indicator bacteria loads to surface waters. Unregulated or poorly managed confined animal facilities on a unit area basis (e.g., per acre) can typically be a higher pollutant loading risk than lightly grazed rangeland. The California Department of Water Resources (DWR) Agricultural Land Use Survey program has compiled digitized crop data which identify the locations of feed lots, dairies, and poultry facilities. The digital DWR crop data can be downloaded from:

<http://www.water.ca.gov/landwateruse/lusrvymain.cfm>

According to the most recent vintage DWR crop map data available for the project area, there are no livestock feedlots, dairies, or poultry facilities in the San Lorenzo Creek watershed. As such, this source category is not assigned a pollutant load allocation in this TMDL.

### **4.3.3 Cropland and Manure Application**


It is widely accepted that a major risk of controllable pathogen loading from croplands is associated with application of raw or untreated manure, or the improper storage of manure (USEPA, 2001). However, only about 5% of the San Lorenzo Creek watershed's land cover is comprised of cropland (see Section 2.1.2).

Furthermore, the Resource Conservation District (RCD) of Monterey County reports that raw manure application in the Central Coast region has been largely phased out (Monterey County RCD, 2006). To validate the RCD reporting, staff evaluated 2007 county-level agricultural census data available from the U.S. Department of Agriculture National Agricultural Statistics Service (NASS) database ([www.nass.usda.gov](http://www.nass.usda.gov)). Staff presumed that reported manure application practices at the Monterey County and San Benito counties scale is representative of manure application rates/practices croplands of the San Lorenzo Creek watershed. NASS reports that in Monterey and San Benito counties, only 0.7 to 1.4% of total cropland acreage received manure application. In fact, the overwhelming majority of farms in these counties with irrigated cropland used inorganic chemical fertilizers, lime, or soil conditioners (CalFERT, 2007; NASS 2007).

For comparative purposes, staff evaluated NASS census data for manure application in the entire conterminous United States. Ranges of manure application rates in other states were significantly higher relative to the manure application rate in Monterey County (see Figure 4-5). In fact, the manure application rate in Monterey and San Benito counties is well below the 10th percentile (i.e., the extreme low end range) of manure application rates reported in the entire conterminous United States. Additionally, although NASS doesn't report the exact nature or type of manure application, it is probable that most, or at least some fraction, of the acreage in Monterey County receiving manure application were with treated or composted manure, rather than raw manure (for example, see CalFERT, 2007). Treated or composted manure typically have negligible pathogen content, since the composting process involves the removal of the pathogenic fraction of the raw stock manure.



Figure 4-5. Percent of cropland receiving manure application (source: NASS).

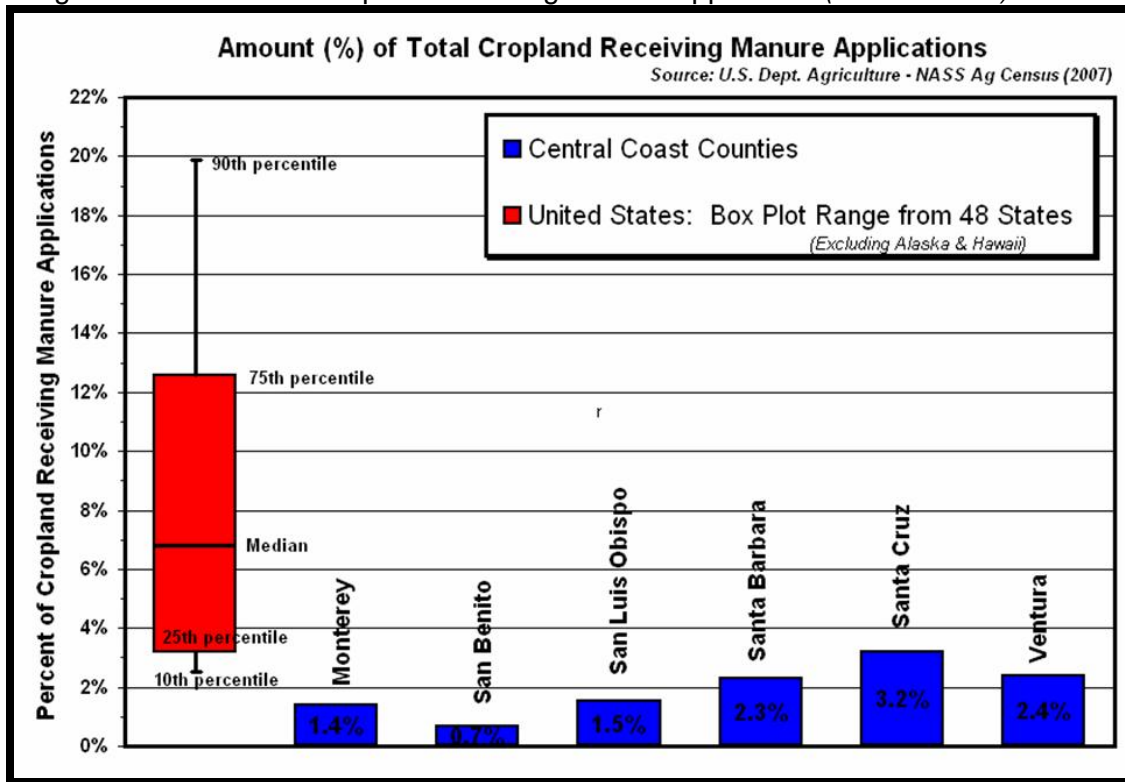


In summary, based on the small amount of cropland in the subwatershed, and considering that raw or untreated manure application is evidently negligible, staff concludes that agricultural cropland operations are not a significant source of controllable fecal coliform loads contributing to exceedance of water quality objectives in the San Lorenzo Creek watershed. Consequently, this source category is not assigned to the load allocation in this TMDL. Staff recognizes that fecal material from natural wildlife sources is deposited on cropland, and potentially mobilized in runoff. Natural background has been identified as a source and will be assigned a load allocation. It is important to note that non-controllable natural background loads are not subject to regulatory actions by the Water Board.

#### 4.3.4 Onsite Disposal Systems

Onsite disposal systems (i.e., septic systems) can potentially contribute significant pathogen loads to receiving surface waterbodies due to leakage or system failure (USEPA, 2001). Figure 4-6 illustrates Census Bureau data which indicates that there is a very low density of OSDS (OSDS/unit area) in the San Lorenzo Creek watershed, relative to other areas of Monterey County. At a preliminary screening-level assessment this suggests that surface water quality problems are unlikely to be associated with failing OSDS.

Figure 4-6. OSDS density, San Lorenzo Creek watershed and vicinity (source: Census Bureau).

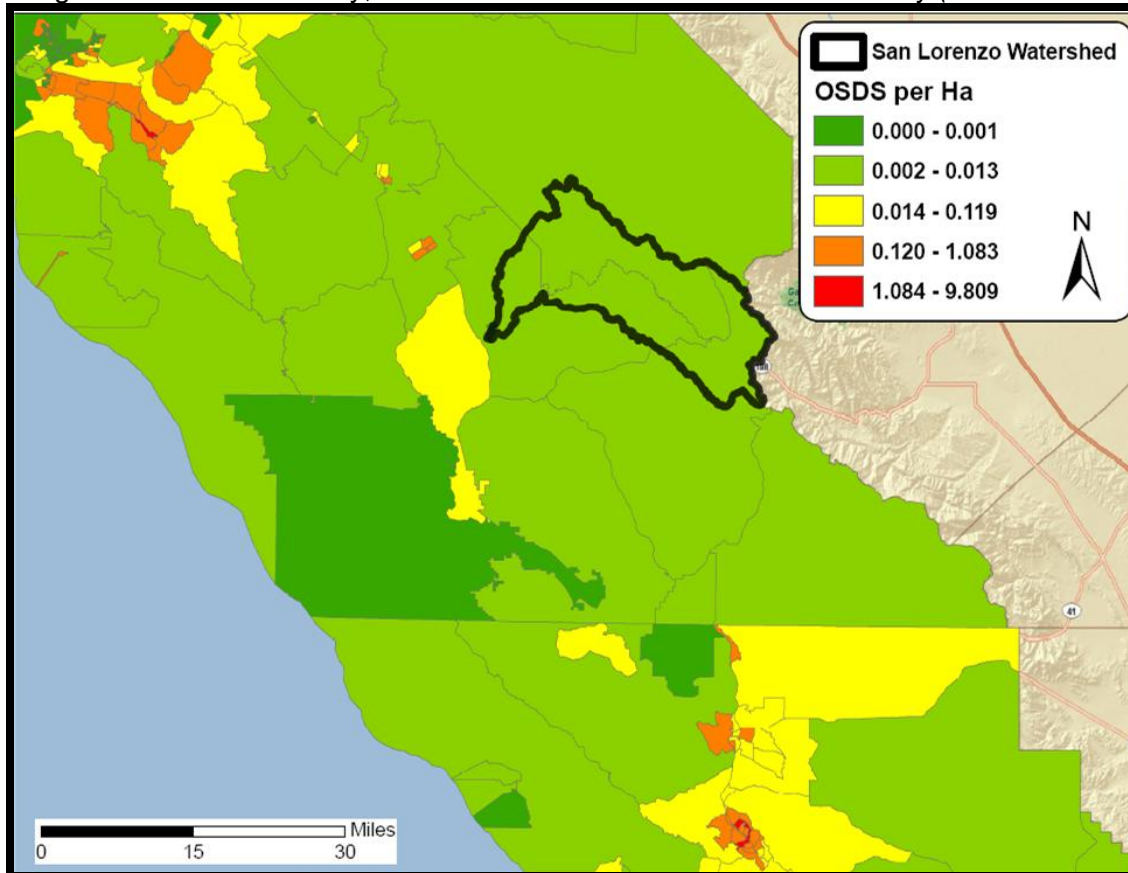

In addition, other watershed physical metrics can be evaluated to assess the risk of pathogen loading from OSDS. Pathogen loading to surface waters from OSDS can generally occur from either hydraulic failure – where sewage breaks out at land surface – or effluent transport through bedrock fractures, potentially discharging to a surface water body if hydraulically connected (Horsley and Witten, 1996). Typically, these kinds of OSDS failures are only a significant threat to surface water quality when the OSDS is located in close proximity to a surface water body. Horsley and Witten (1996) report that the risk of pathogen loading to surface waters from OSDS is highest when the OSDS is located with 100 feet of a surface water; when local soil permeability is low; or when there is shallow bedrock, particularly when the bedrock is prone to fracture permeability. In contrast, when OSDS are located at distance from a surface waterbody; when soil permeability is high, and/or where bedrock is at depth, the risks of pathogen loading to surface water becomes significantly and progressively lower.

Consequently, staff evaluated soil and geologic attributes and land use data to assess the risk of potential pathogen loading from OSDS in the project area. Areas proximal to the creek are

comprised predominantly of a variety of hydrologic soil group type B (see Appendix C: *Supplemental Maps and Spatial Data*). Hydrologic soil group B is composed of moderate to well drained soils that are generally not prone to runoff. Accordingly, OSDS effluent that might surface due to hydraulic failure would probably be unlikely to runoff and discharge to streams in these areas. Furthermore, the overwhelming majority the entire watershed is composed of sedimentary rock (see Appendix C: *Supplemental Maps and Spatial Data*). Sedimentary rock is not generally prone to fracture porosity; as such any OSDS in the project area evidently at low risk of sewage transport to surface waters via fracture hydraulics.

Based on the aforementioned information, OSDS appear to be a low risk and a negligible source of FIB loading in the Project Area and are consequently not assigned to the load allocation in this TMDL.

#### **4.3.5 Sediment Sources (Bedload)**

Stream and lake sediments can serve as an environmental reservoir for fecal coliform and other indicator bacteria. In previous central coast pathogen TMDLs, staff has received recommendations from scientific peer reviewers to consider including sediment resuspension of indicator bacteria as a distinct nonpoint source load (Wuertz and Schriewer, 2009).

Surviving fecal coliforms deposited in sediments and organic material at some time in the past, and which are not attributable to a recent pollution event, could be swept up into the water column due to a resuspension event. This may constitute a naturalized source of fecal coliform stream loads, referred to in this section as “bedloads”. Sediments can be resuspended when shear stress exerted on the stream bed exceeds the critical shear stress for incipient motion. This scouring results in stream sediment with associated indicator bacteria being resuspended, and thus contributing to the overlying water column concentrations of fecal coliform.

Staff considers the fecal coliforms resulting from propagation and multiplication from controllable sources to be a naturalized source. Staff does consider these fecal coliforms controllable, insofar as the parent coliforms are from controllable sources. It is reasonable to presume that a substantial fraction of sediment-associated bacteria originally came from controllable sources given that the overwhelming majority of fecal coliform production in the project area appears to be from anthropogenic activities and domestic animal operations (refer back to Figure 4-1).


There is uncertainty about the scope and extent of this source in the project area, and the potential for propagation of microbial indicators deposited in sediment or organic matter in the San Lorenzo Creek watershed is largely unknown at present. However, using GIS spatial data for soils it is possible to develop screening-level assessments of the potential risk of sediment-associated fecal coliform sources in the Project Area.

Sediment-associated bacteria are typically associated with fine, or cohesive sediment particles in aquatic environments (Gannon, et al., 1983; Wilkinson et al., 1995). Cohesive sediments are defined as sediment particles less than 60 microns in diameter; this generally includes silt-sized and clay-sized particles (NRCS, 1999). Typical flow velocities that cause streambed erosion of fine-grained sediments range from 3.0 feet/sec for silty loams to 5.0 feet/sec for colloidal clays and silts (City of Raleigh, 2003).

Therefore, based on the aforementioned literature, staff presumes that locations in the project area comprised of soils with  $\geq 40\%$  clay-sized particles would constitute potential significant source areas of sediment-associated bacteria loads. The 40% clay content criterion was chosen by staff because this is consistent with published U.S. Department of Agriculture

(USDA) soil criteria. The USDA's soil texture chart classifies soils with greater than 40% clay content as clay, silty-clay, or sandy-clay depending on the fractional content of sand or silt: <http://soils.usda.gov/technical/aids/investigations/texture/> Soil characteristics are contained in the Monterey County and San Benito County Soil Surveys, published by the Natural Resources Conservation Service (NRCS), and the Soil Survey Geographic (SSURGO) database for soils. Staff used NRCS soil attribute data to geographically locate regions characterized predominantly by clay-rich soils in the project area (see Figure 4-7).

Figure 4-7. Percent clay in soils in the San Lorenzo Creek watershed (source: NRCS)

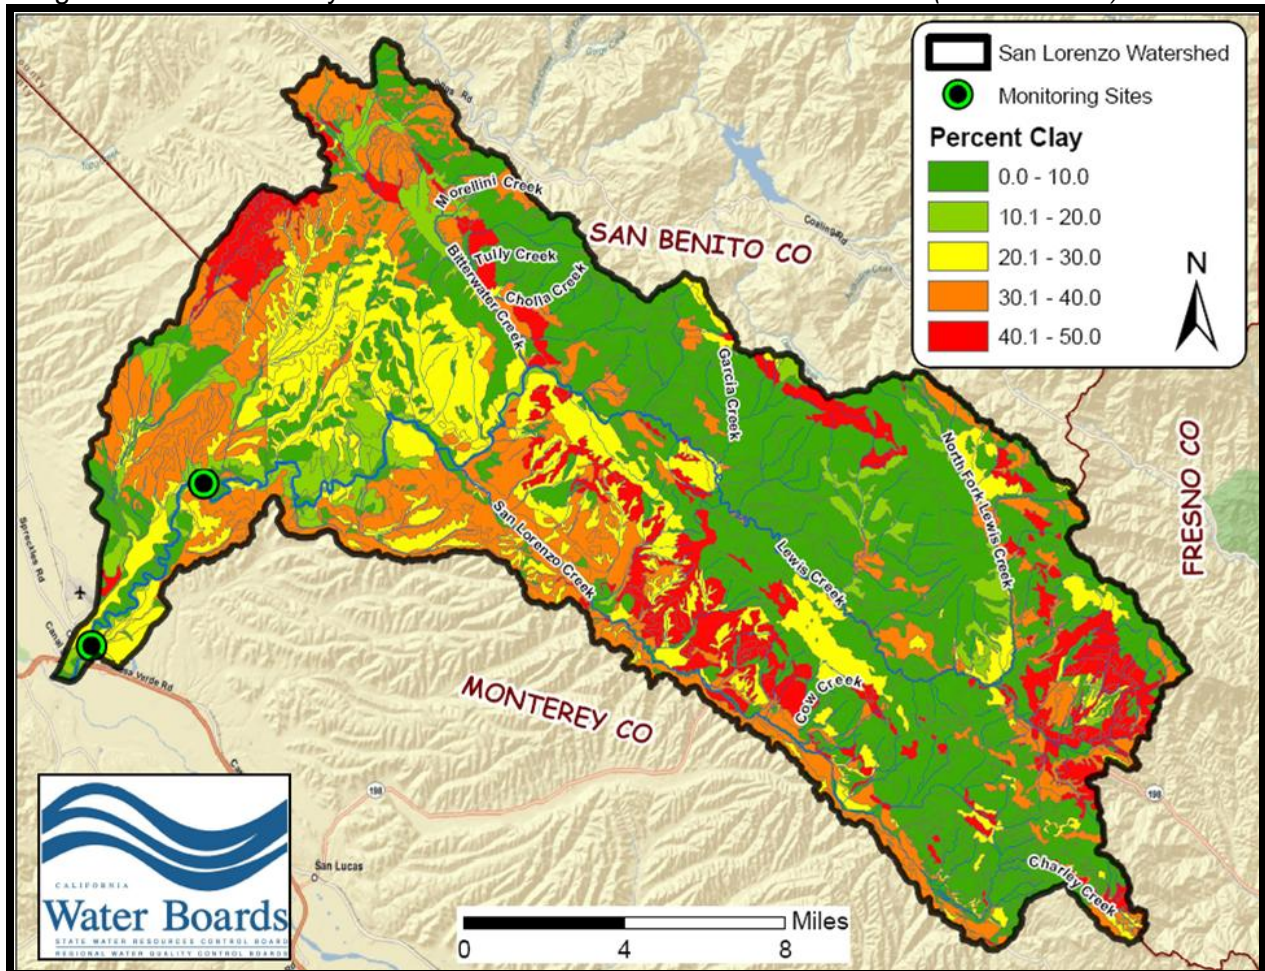

The NRCS soil data indicates that approximately 13% of the San Lorenzo Creek Watershed TMDL project area is comprised of soils containing greater than 40% clay materials (see Table 4-4). This represents an appreciable amount of the watershed's areal extent. Consequently, staff concludes that San Lorenzo Creek could have potentially significant sediment-associated bacteria bedloads



Table 4-4. Percent of TMDL project area comprised of clay-rich soils.

San Lorenzo Creek Watershed (acres)	Amount of watershed Comprised of >40% Clay Soils <sup>A</sup> (acres)	Percent of watershed Soils Comprised of > 40% Clay Soils
141,549	18,446	<b>13%</b>

A- Corresponds to USDA soil texture classifications as: clay; silty-clay; or sandy-clay.

The loads associated with resuspension of sediment (bedloads) can be estimated using the Bacteria Load Estimation Spreadsheet (BLEST) tool, developed by the Texas Commission on Environmental Quality. The methodology for calculating bedloads with BLEST is detailed in Appendix G: *Bedloads - Bacteria Load Estimator Spreadsheets (BLEST)*. By multiplying the occurrence of resuspension flows (i.e., storm events), bacteria resuspension rates, estimates of the length of time the stream experiences critical shear conditions, and estimates of stream width and stream lengths, estimated fecal coliform bedloads were calculated as shown in Table 4-5.

Table 4-5. Estimated indicator bacteria bedloads.

Waterbody	Ave. No. of Storm Events/Year*	Median <i>E. Coli</i> Resuspension Rate (MPN m <sup>-2</sup> sec <sup>-1</sup> )**	MPN / Storm Event	Annual Bedload (MPN/yr)
San Lorenzo Creek Watershed	6	11,000	4.66E+12	<b>2.89E+13</b>

\* Average number of annual precipitation events  $\geq 0.5$  inches in 24 hour period, 1994 to 2010 (source: daily precipitation data from King City CIMIS weather station #113), available from California Irrigation Management Information System)

\*\* Jamieson et al. (2005). *E. coli* value. Fecal coliform resuspension rate was not reported. *E. coli* is a bacterial subset of fecal coliform, accordingly Staff use *E. coli* here, as a surrogate for fecal coliform.

In summary, based on the information presented above, staff considers bacteria from resuspended sediments (bedload) to be a probable source contributing to observed loads in the water quality monitoring data from San Lorenzo Creek. As such, sediment sources are assigned to the load allocation for this TMDL.

#### 4.3.6 Non-controllable Natural Sources

Wildlife (mammals and birds) contribute a background level of fecal coliform bacteria to surface waters. Wastes from wildlife may be carried into nearby streams by runoff during rainfall. Animals can also defecate directly into streams. These constitute non-controllable natural sources not subject to regulation by the Water Board.

Some uncertainty exists whether the non-controllable fraction of FIB alone is causing receiving water concentration of FIB to exceed the numeric target. The ability to differentiate between controllable and natural sources is an uncertainty in these TMDLs. This phenomenon represents an uncertainty that staff has attempted to address through an empirical analysis of land use data, sources of fecal coliform bacteria (humans, wildlife, livestock), hydrologic data, livestock and wildlife inventory data in this Project Report.

Using the species-specific fecal coliform production and the delivery ratio assumptions outlined in Section 4.1 and the calculations from the BSLC spreadsheet tool, the annual amount of fecal coliform that is potentially available for runoff or discharge into surface waters is shown in Table 4-6.

Table 4-6. Estimated annual fecal coliform load from wildlife available for potential discharge into surface waters.

Watershed	Wildlife Fecal Coliform Available for Potential/Discharge (MPN/year)				Total Fecal Coliform Available
	Forest	Cropland	Pasture/Rangeland	Direct In-stream Defecation	
San Lorenzo Creek Watershed	4.67E+12	1.75E+13	2.44E+12	7.61E+13	<b>1.01E+14</b>

The calculated potential annual load of 4.58E+13 mpn/year is significantly less than the potential contribution from domestic animals (see Section 4.3.1), but the magnitude nonetheless represents a substantial load to surface waters in the project area.

In summary, staff concludes that wildlife is a source category of indicator bacteria in surface waters of the project area. As such, this source category is assigned a load allocation in this TMDL. Loads from non-controllable natural sources are not subject to regulation by the Water Board.

#### 4.4 Summary of Sources

Table 4-7 shows the summary of identified sources of indicator bacteria in the San Lorenzo Creek watershed TMDL project area. Staff listed the sources by source category and the estimated proportional magnitude of FIB loads. The source loads are staff estimates based on the amounts of fecal coliforms that are available to potentially be discharged to surface waters from various sources. It is worth reiterating that these estimates are for the amount of fecal indicator bacteria *potentially* available for discharge to surface waters; there is no attempt to make discounts for load reductions resulting from improved management practices that may already be in place along some stream reaches.


The estimated relative magnitude of identified sources is also shown graphically in Figure 4-8. As noted previously, there are uncertainties associated with such estimates. The estimated population and/or densities of fecal coliform sources are approximations based on census data, scientific literature, or indirect evidence. The delivery ratios of fecal coliform used from section 4.1 are broad approximations, derived from literature values for loading rates or best professional judgment. The Bacteria Source Load Calculator spreadsheet results represent one line of evidence in TMDL source characterization, producing a scoping level risk assessment of sources and potential loads. The amount of fecal material delivered from any one source will vary depending on numerous factors. Because of this uncertainty, these are estimates only as the actual loading from each source is unknown. That said however, in making these estimates Staff employed methods and techniques that are recognized by USEPA or other Agencies to develop approved TMDLs.

It is important to emphasize that these estimated amounts of fecal coliform available for discharge to surface waters represents an aggregate load for the entire San Lorenzo Creek watershed. It is not known what proportion of this load is actually being measured at monitoring site 309LOR. This is because bacteria flowing from the upper reaches of a large watershed may have little impact on a stream reach in the lowermost parts of the watershed due to die off and attenuation. Note also that the estimated relative magnitude of potential source contributions is calculated on an annualized basis. These represent annual estimated loads from the entire watershed drainage. Loads from various source categories could have substantial variability on different seasonal and temporal scales, or due to localized conditions.

Table 4-7. Estimated annual fecal coliform from all sources available for potential discharge into surface waters (MPN/year).

	Point Sources (WLA)	Nonpoint Sources (LA)					Total
	None Identified	Runoff - Domestic Animal Waste	Runoff - Natural Background	Domestic Animals In-stream	Wildlife In-stream	Bedload	
San Lorenzo Creek watershed	0	5.71E+13	1.15E+13	2.31E+14	3.43E+13	2.89E+13	3.34E+14

Figure 4-8. Estimated distribution of fecal coliform annually available for potential discharge to surface waters.

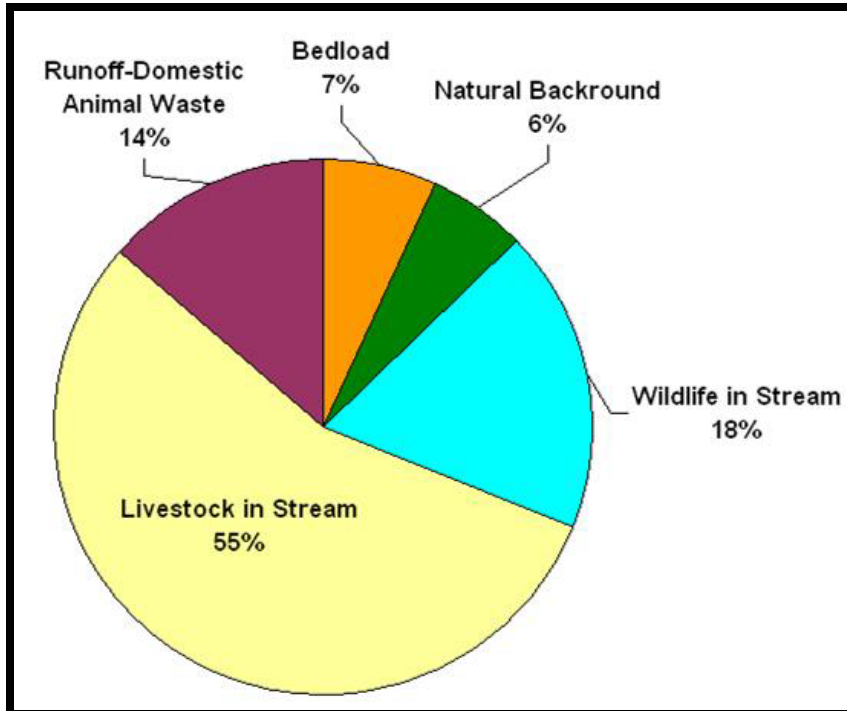

## 5 LOADING CAPACITY AND ALLOCATIONS

### 5.1 Introduction

A TMDL is the pollutant loading capacity that a water body can accept while protecting beneficial uses. Usually, TMDLs are expressed as loads (mass of pollutant calculated from concentration multiplied by the volumetric flow rate), but in the case of fecal coliform, it is more logical for TMDLs to be based on concentration. TMDLs can be expressed in terms of either mass per time, toxicity, or other appropriate measure [40 CFR §130.2(I)]. Expressing the TMDL as a concentration equal to the water quality objective ensures that the water quality objective will be met under all flow and loading conditions. The density (concentration) of fecal indicator organisms in a discharge and in the receiving waters is the technically relevant criterion for assessing the impact of discharges, the quality of the affected receiving waters, and the public-health risk.

### 5.2 Loading Capacity

The loading capacity for water body segments in the San Lorenzo Creek watershed is the amount of fecal coliform and *E. coli* that can be assimilated without exceeding the water quality objectives. The Basin Plan water quality objective for fecal coliform and the USEPA freshwater guidance for *E. coli*, (USEPA, 1986) and thus the loading capacity for the waterbodies are:

#### **Fecal coliform**

*Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200 MPN per 100 mL, nor shall more than 10 percent of samples collected during any 30-day period exceed 400 MPN per 100 mL.*

#### **E. coli**

*Based on a statistically sufficient number of samples (generally not less than 5 samples equally spaced over a 30-day period), the geometric mean of E. coli densities should not exceed: 126 per 100mL; and no sample should exceed a one sided confidence limit (C.L.) calculated using the following as guidance: lightly used for contact recreation (90% C.L.) = 409 per 100mL (USEPA, 1986)*

### 5.3 Linkage Analysis

The goal of the linkage analysis is to establish a link between pollutant loads and water quality. This, in turn, supports that the loading capacity specified in the TMDLs will result in attaining the numeric target. For these TMDLs, this link is established because the numeric target concentrations are the same as the TMDLs, expressed as a concentration. Sources of fecal coliform and *E. coli* that lead to waterbody impairment have been identified. Therefore, reductions in fecal coliform and *E. coli* loading from these sources should result in a reduction of water column concentrations. The numeric targets are protective of recreational beneficial uses; hence the TMDLs define appropriate water quality conditions.



## 5.4 TMDL Allocations

Allocations are concentrations, loads, or some other measure that when totaled, equals the loading capacity described as shown in Section 5.2. Allocations are applied to the sources identified in the Source Analysis Section.

### 5.4.1 Concentration-based TMDL

A TMDL is the pollutant loading capacity that a water body can accept while protecting beneficial uses. Usually, TMDLs are expressed as loads (mass of pollutant calculated from concentration multiplied by the volumetric flow rate), but in the case of fecal coliform, it is more logical for TMDLs to be based on concentration. TMDLs can be expressed in terms of either mass per time, toxicity, or other appropriate measure [40 CFR §130.2(l)]. Concentration based TMDLs make more sense in this situation because the public health risks associated with recreating in contaminated waters scales with organism concentration, and fecal coliform is not readily controlled on a mass basis. Establishment of a concentration-based, rather than a load-based TMDL has the advantage of eliminating the need to conduct a potentially error-prone analysis to link loads and expected concentrations. A load-based TMDL would require calculation of acceptable loads based on acceptable bacterial concentrations and expected flows, and then back-calculation of expected concentrations under various load reduction scenarios. Since flows in the San Lorenzo Creek, are highly variable and difficult to measure, such an analysis would inevitably involve a great deal of uncertainty, with no increased water quality benefit.

As such, staff proposes the TMDLs as the same set of concentrations as staff proposed in the numeric targets section. Therefore, the concentration-based TMDLs for fecal coliform and *E. coli* for all impaired waters in the San Lorenzo Creek watershed, including:

The following waterbodies currently listed on the 303(d) list:

1. The San Lorenzo Creek (the entire Creek) from the uppermost reaches of the waterbody to the confluence with the Salinas River

And for all tributaries to the above-named waterbodies, as well as herein un-named waterbodies situated in the San Lorenzo Creek watershed (which includes hydrologic unit codes HUC-10 1806000510 {San Lorenzo Creek} and HUC-10 1806000509 {Lewis Creek}) are concentration-based TMDLs applicable to each day of all seasons and are equal to the following:

*Discharges may not cause receiving water concentration of fecal coliform and E. coli to exceed the following:*

#### **Fecal coliform**

*Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200/100mL, nor shall more than ten percent of total samples during any 30-day period exceed 400/100mL.*

#### **E. coli**

*Based on a statistically sufficient number of samples (generally not less than 5 samples equally spaced over a 30-day period), the geometric mean of E. coli densities should not exceed: 126 per 100mL; and no sample should exceed a one sided confidence limit (C.L.) calculated using the following as guidance: lightly used for contact recreation (90% C.L.) = 409 per 100mL (USEPA, 1986)*

### 5.4.2 TMDL Allocations

Table 5-1 shows the load allocations to responsible parties. All the allocations are equal to the TMDLs, which are expressed as receiving water concentrations. As noted previously, staff proposes to implement a concentration-based TMDL, equal to the numeric targets for fecal coliform.

All responsible parties for sources of fecal coliform to the San Lorenzo Creek watershed will be accountable to attain these allocations. The parties responsible for the allocations to non-natural (controllable) sources are not responsible for the allocation to natural (uncontrollable) sources.

Table 5-1. TMLD Allocations.

<b>WASTE LOAD ALLOCATIONS</b>			
<b>Waterbody</b>	<b>WBID</b>	<b>Party Responsible for Allocation (Source) NPDES/WDR number</b>	<b>Receiving Water Fecal Coliform (MPN/100mL)</b>
All impaired water bodies <sup>a</sup>	CAR3091800020020103133204	NONE IDENTIFIED	NOT APPLICABLE
<b>LOAD ALLOCATIONS</b>			
<b>Waterbody</b>	<b>WBID</b>	<b>Responsible Party (Source)</b>	<b>Receiving Water Fecal Coliform (MPN/100mL)</b>
All impaired water bodies <sup>a</sup>	CAR3091800020020103133204	Owners/operators of land used for/containing domestic animals/livestock  (Domestic animals/livestock waste)	Allocation-1 Allocation-2
All impaired water bodies <sup>a</sup>	CAR3091800020020103133204	No responsible party  (Natural sources)	Allocation-1 Allocation-2
Wasteload Allocation: None – not applicable.			
Load Allocation – Allocation-1: (Equal to the TMDL for fecal coliform): Fecal coliform concentration, based on a minimum of not less than five samples for any 30-day period, shall not exceed a log mean of 200 MPN/100mL, nor shall more than ten percent of total samples during any 30-day period exceed 400 MPN/100 mL.			
Load Allocation – Allocation-2: (Equal to the TMDL for <i>E. coli</i> ): Based on a statistically sufficient number of samples (generally not less than 5 samples equally spaced over a 30-day period), the geometric mean of <i>E. coli</i> densities should not exceed: 126 per 100mL; and no sample should exceed a one sided confidence limit (C.L.) calculated using the following as guidance: lightly used for contact recreation (90% C.L.) = 409 per 100mL (USEPA, 1986)			

<sup>a</sup> San Lorenzo Creek: all reaches and tributaries of the waterbody to the confluence with the Salinas River

The TMDLs are considered achieved when the allocations assigned to all individual responsible parties are met, or when the numeric targets are consistently met.

Should all control measures be in place, pathogen indicator organism concentrations remain high, and a TMDL not be met, staff may investigate (e.g., genetic studies to isolate sources or other appropriate monitoring) to determine if the high level of indicator organisms is due to uncontrollable sources. Responsible parties may demonstrate that controllable sources of pathogen indicator organisms are not contributing to exceedance of water quality objectives in receiving waters. If this is the case, staff may consider re-evaluating the numeric targets and allocations. For example, staff may propose a site-specific objective to be approved by the Central Coast Water Board. The site-specific objective may be based on evidence that natural or background sources alone were the cause of exceedances of a TMDL.

### 5.4.3 Daily Load Expressions

Staff provides daily load expressions in light of a court decision (Friends of the Earth, Inc. v. EPA, et al., No. 05-5015, D.C. Cir. 2006), and USEPA guidance {USEPA 2007(b)}, despite the fact that this is a concentration-based TMDL and a daily or average daily TMDL is not appropriate for this TMDL project. Mass-based daily load expressions are provided to comply with USEPA technical and legal guidance. USEPA continues to recognize the validity of concentration based TMDLs, in accordance with 40 CFR 122.45(f), but recommends supplementing a concentration-based TMDL with a daily load expression, as shown below:

*“For TMDLs that are expressed **as a concentration of a pollutant**, a possible approach would be to use a **table and/or graph to express the TMDL as daily loads for a range of possible daily stream flows**. The in-stream water quality criterion multiplied by daily stream flow and the appropriate conversion factor would translate the applicable criterion into a daily target.”\**

\*emphasis added

From: USEPA. 2007. Options for Expressing Daily Loads in TMDLs. USEPA Office of Wetlands, Oceans, and Watersheds, Draft Guidance, June 22, 2007.

The mass-based daily load expressions for the San Lorenzo Creek fecal indicator bacteria TMDL are presented in Appendix I: *Daily Load Expressions*. Nonetheless, we intend to implement the concentration-based TMDLs and allocations, consistent with the aforementioned USEPA guidance {USEPA, 2007(b)}. As such, daily load expressions presented in Appendix I: *Daily Load Expressions* represent an alternative way to express concentration-based allocations, but the mass-based daily load expressions do not formally constitute the TMDL or the allocations.

## 5.5 Margin of Safety

The TMDL requires a margin of safety component that accounts for the uncertainty about the relationship between the pollutant loads and the quality of the receiving water (CWA 303(d)(1)(C)). For this project, a margin of safety has been established implicitly through the use of protective numeric targets, which are, in this case, the water quality objectives for water contact recreational uses.

The total and fecal coliform TMDLs for the water bodies in this project are the Water Board's Basin Plan objectives. When other conditions cause degradation of water quality beyond the levels or limits established as water quality objectives, controllable conditions shall not cause further degradation of water quality" (Basin Plan, p. III-2). Because the allocation for controllable sources is set at the numeric targets, if achieved, these allocations will achieve the water quality objectives in the receiving water. Thus, in this TMDL there is no uncertainty that controlling the load from controlled sources will positively affect water quality by reducing the fecal indicator bacteria contribution.

However, in certain locations there is a possibility that non-controllable, or, natural sources will themselves occur at levels exceeding water quality objectives. And while it is controllable water quality conditions ("actions or circumstances resulting from man's activities" (Basin Plan, p. III-2)) that must conform to water quality objectives, receiving water quality will contain discharge from both controllable and natural sources.

Reporting and monitoring will indicate whether the allocations from controllable sources are met, thereby minimizing any uncertainty about the impacts of loads on the water quality.

## **5.6 Critical Conditions and Seasonal Variation**

Critical conditions occur when the prescribed load allocation results in achieving the water quality standard by a narrow margin. The condition is considered critical because any unknown factor regarding environmental conditions or the calculation of the load allocation could result in not achieving the water quality standard. Therefore, critical conditions are particularly important with load-based allocations and TMDLs. However, this TMDL is a concentration-based TMDL. As such, the numeric targets and allocations are the concentrations equal to the water quality objectives. Therefore, there exists no uncertainty as to whether the allocations and TMDLs will result in achieving water quality objectives.

Based on load duration curve analysis, Staff determined exceedances of water quality objective occur year-round and under all flow conditions (see Appendix H: *Load Duration Curves*). Variability is accounted for and addressed by use of the allocations equal to the REC-1 water quality objective which assures the loading capacity of the water body be met under all flow and seasonal conditions.

# **6 IMPLEMENTATION AND MONITORING**

## **6.1 Implementation Plan**

The purpose of the Implementation Plan is to describe the steps necessary to reduce pathogen loads and to achieve these TMDLs. The Implementation Plan identifies the following: 1) parties responsible for taking these actions 2) actions expected to reduce pathogen loading; 3) mechanisms by which the Central Coast Water Board will assure these actions are taken; 4) reporting and evaluation requirements that will indicate progress toward completing the actions; 5) and a timeline for completion of implementation actions.

The Implementation Plan also outlines economic considerations to achieve compliance. A monitoring plan designed to measure progress toward water quality goals is included in Section 6.5.

## 6.2 Implementing Parties

Table 6-1 identifies the probable sources contributing to fecal coliform impairment and the parties responsible for implementation of this TMDL.

Table 6-1. Source Categories and Implementing parties.

Source Category	Implementing Parties
Livestock	Owners and Operators of Lands Containing Domestic Animals
Wildlife	Not Subject to Regulation

## 6.3 Existing Plans and Policies

### 6.3.1 California Impaired Waters Policy and Impaired Waters Guidance

The State of California *TMDL Guidance: A Process for Addressing Impaired Waters in California* (SWRCB, 2005) and the *Water Quality Control Policy for Addressing Impaired Waters: Regulatory Structure and Options* (SWRCB, 2005) provide guidance and policy that describe the process for developing and adopting TMDLs.

The Policy states that the Water Boards “*have broad flexibility and discretion in fashioning TMDL implementation programs and are encouraged to be as innovative and creative as possible and, as appropriate, to build upon Third-Party Programs.*” Accordingly, the policy indicates that in developing and adopting TMDLs the Boards may use any combination of existing regulatory tools to do so. Existing regulatory tools include individual or general waste discharge requirements (be they under Chapter 4 or under Chapter 5.5 (NPDES permits) of the Porter-Cologne Water Quality Control Act), individual or general waivers of waste discharge requirements, enforcement actions, interagency agreements, regulations, basin plan amendments, and other policies for water quality control.

In summary, the Impaired Waters Policy states that TMDLs may be adopted in any of the following ways:

1. *Multiple actions of the Water Board:* If multiple actions by the Water Board are required, the solution must be implemented through a Basin Plan amendment or other regulation.
2. *Single Vote of the Water Board:* In some circumstances a single discharger may be responsible for the impairment or a single order of the Water Board may be adequate to address the impairment. If the solution can be implemented with a single vote of the Water Board, it may be implemented by that vote. When an implementation plan can be adopted in a single regulatory action, such as a permit, a waiver, or an enforcement order, etc., there is no legal requirement to first adopt the plan through a Basin Plan amendment.
3. *Regulatory Action of Another State, Local, or Federal Agency:* If the Water Board finds that a proposed solution will correct the impairment, the Water Board may certify that the regulatory action will correct the impairment and, if applicable, implement the assumptions of the TMDL, in lieu of adopting a redundant program.
4. *Nonregulatory Action of Another Entity:* If the Water Board finds that the action will correct the impairment, the Water Board may certify that the nonregulatory action will correct the impairment and, if applicable, implement the assumptions of the TMDL, in lieu of adopting a redundant program.

5. *Voluntary Actions by Nonregulatory Entities*: Such actions are appropriate if the Water Board makes findings, supported by substantial evidence in the project record, that a program being implemented by a nonregulatory entity will be adequate to correct the impairment.

Note that in accordance with the Impaired Waters Policy, in some circumstances the Water Boards may rely upon actions by non-regulatory entities, if the Water Board makes findings that a program being implemented by a non-regulatory entity will be adequate to correct the impairment. The Impaired Waters Guidance states:

“The fact Regional Boards have limited resources to accomplish their water quality mission can and should be used as a basis to encourage interested persons to undertake to abate impairments in the time before the Regional Boards may otherwise be able to address them...Employing these abbreviated procedures when warranted is a matter of efficiency and resource allocation. California is obligated to establish and implement 800 or more TMDLs over the next ten years for over 1,800 pollutant/water body combinations. Given existing resource constraints (both financial and personnel), to the extent California can consolidate regulatory actions or eliminate unnecessary regulatory processes when fulfilling our obligations under Section 303(d), the State and Regional Boards can expedite their responsibility to address and correct impaired waters in California, and expend resources on more TMDLs instead of redundant processes.” \*

*\*Emphasis added*

From: STATE OF CALIFORNIA S.B. 469 TMDL GUIDANCE A PROCESS FOR ADDRESSING IMPAIRED WATERS IN CALIFORNIA (California State Water Resources Control Board, June 2005 - Approved by Resolution 2005-0050)

Consequently, the State Impaired Water policy establishes a certification process whereby the Water Boards can formally recognize appropriate regulatory or nonregulatory actions of other entities as alternative implementation programs when the Water Boards determine those actions will result in attainment of standards. For alternative programs intended to control non-point source contributions to an impairment, such programs must be consistent with the Key Elements of an NPS Pollution Control Implementation Program (see Section 6.3.3), pursuant to the SWRCB Policy for Implementation and Enforcement of the Nonpoint Source Pollution Control Program.

While the State Impaired Waters policy recognizes that certification of alternative programs of implementation may be merited as appropriate and as a matter of efficiency, it is important to emphasize the Water Board retains the authority to commence a regulatory response if an impairment has not been adequately addressed by a non-regulatory action within a specified time period. The Water Board may not indefinitely defer taking necessary action if another entity is not properly addressing a problem. Note that a regulatory response by the Water Board must use the administrative permitting authorities as outlined in the Nonpoint Source Implementation and Enforcement policy (see Section 6.3.3).

### **6.3.2 California Nonpoint Source Program Plan**

The Nonpoint Source Program is a regulatory strategy aimed at addressing nonpoint source pollution throughout the State of California. In July 2000 the State Water Resources Control Board and the California Coastal Commission developed the *Plan for California's Nonpoint*

*Source Pollution Control Program* to reduce and prevent nonpoint source pollution in California, expanding the State's nonpoint source pollution control efforts. This effort represented the first significant upgrade of California's Nonpoint Source Pollution Control Program since its inception in 1988. The Nonpoint source Program was revised to enhance efforts to protect water quality and to conform to the Clean Water Act Section 319 (CWA 319) and the Coastal Zone Act Reauthorization Amendments Section 6217 (CZARA). The lead state agencies for the NPS Program are the State Water Board, the nine Regional Water Boards and the California Coastal Commission. The NPS Program's long-term goal is to "improve water quality by implementing the management measures identified in the California Management Measures for Polluted Runoff Report (CAMMPR) by 2013. Under the California NPS Program Pollution Control Plan, TMDLs are considered one type of implementation planning tool that will enhance the State's ability to foster implementation of appropriate NPS management measures.

### **6.3.3 Policy for Implementation and Enforcement of the Nonpoint Source Program**

The *Policy for Implementation and Enforcement of the Nonpoint Source Pollution Control Program* adopted in August 2004, explains how Water Board authorities granted by the Porter-Cologne Water Quality Control Act will be used to implement the California NPS Program Plan (see Section 6.3.2). The *Nonpoint Source Implementation and Enforcement Policy* requires the Regional Water Boards to regulate all nonpoint sources (NPS) of pollution using the administrative permitting authorities provided by the Porter-Cologne Act. Nonpoint source dischargers must comply with Waste Discharge Requirements (WDRs), waivers of WDRs, or Basin Plan Prohibitions by participating in the development and implementation of Nonpoint Source Pollution Control Implementation Programs. NPS dischargers can comply either individually or collectively as participants in third-party coalitions. (The "third-party" Programs are restricted to entities that are not actual discharges under Regional Water Board permitting and enforcement jurisdiction. These may include Non-Governmental Organizations, citizen groups, industry groups, watershed coalitions, government agencies, or any mix of the these.) All Programs must meet the requirements of the following five key elements described in the NPS Implementation and Enforcement Policy. Each Program must be endorsed or approved by the Regional Water Board or the Executive Officer (if the Water Board has delegated authority to the Executive Officer).

- Key Element 1: A Nonpoint Source Pollution Control Implementation Program's ultimate purpose must be explicitly stated and at a minimum address NPS pollution control in a manner that achieves and maintains water quality objectives.
- Key Element 2: The Program shall include a description of the management practices (MPs) and other program elements dischargers expect to implement, along with an evaluation program that ensures proper implementation and verification.
- Key Element 3: The Program shall include a time schedule and quantifiable milestones, should the Regional Water Board require these.

- Key Element 4: The Program shall include sufficient feedback mechanisms so that the Regional Water Board, dischargers, and the public can determine if the implementation program is achieving its stated purpose(s), or whether additional or different MPs or other actions are required (See Section 12, Monitoring Program).
- Key Element 5: Each Regional Water Board shall make clear, in advance, the potential consequences for failure to achieve a Program's objectives, emphasizing that it is the responsibility of individual dischargers to take all necessary implementation actions to meet water quality requirements.

#### **6.3.4 Central Coast Basin Plan**

The Central Coast Basin Plan provides the Water Board's goals and description of general control actions with regard to discharges from rangeland (Basin Plan, Chapter 4, section VIII.C.6.), as reproduced below.

*The Water Board encourages grazing strategies that maintain adequate vegetative cover to reduce erosion and sedimentation. The Water Board promotes dispersal of livestock away from surface waters as an effective means of reducing nutrient and pathogen loading. The Water Board encourages use of Best Management Practices to improve water quality, protect beneficial uses, protect stream zone and lakeshore areas, and improve range and watershed conditions including:*

- *Implementing rest-rotation grazing strategies*
- *Changing the season of use (on/off dates)*
- *Limiting the number of animals*
- *Increasing the use of range riders to improve animal distribution and use of forage*
- *Fencing to exclude livestock grazing in sensitive areas*
- *Developing non-stream zone watering sites*
- *Conducting physical improvements such as restoring riparian habitat.*

*These same Best Management Practices may result in improved range and increased forage production, resulting in increased economic benefit to the rancher and land owner. The Water Board also encourages land owners to develop appropriate site-specific Best Management Practices using the technical assistance of the U.S. Soil Conservation Service and the U.S. EPA.*

The Basin Plan states that in addition to relying on the grazing management expertise of agencies such as the U.S. Forest Service, U.S. Bureau of Land Management, or Range Management Advisory Committee the Water Board can directly regulate grazing activities to protect water quality, under the authorities granted to it by the Porter-Cologne Water Quality Control Act.

#### **6.3.5 California Rangeland Water Quality Management Plan**

The California Rangeland Water Quality Management Plan was developed by the Rangeland Management Advisory Committee, a statutory committee which advises the California Board of Forestry on rangeland resources. The Committee developed a California Rangeland Water Quality Management Plan (Rangeland Plan) which concludes that ranches should complete Rangeland Water Quality Management Plans for their respective ranches. The Rangeland Plan was accepted by the State Board in 1995 (SWRCB Resolution No. 95-43). It summarizes



authorities and mandates for water quality and watershed protection on non-federal rangelands, and specifies a framework for the cooperative development of ranch management strategies for water quality protection. The Rangeland Plan also describes sources of technical and financial assistance available to ranch owners.

The California Rangeland Plan was developed by a broad array of interest groups, including livestock interests, and is supported by the grazing industry. The State formally incorporated the Rangeland Water Quality Management Plan for private rangelands into SWRCB Nonpoint Source Program Plan (see Section 6.3.2)

The Rangeland Plan states that where beneficial uses of waters are impaired or threatened by rangeland operations as determined by the Water Board, land owners shall assess the impact of their operations on beneficial uses; show the existence of a viable Rangeland Plan with implementation underway; prepare and implement a nonpoint source management plan (as described in section 2.b. or the Rangeland Plan); or contact the NRCS, RCD, UC Cooperative Extension, or a qualified resource professional of their choice, to schedule an assessment and begin development of a Rangeland Plan.

## **6.4 Implementation Mechanism for San Lorenzo Creek TMDL**

Implementation of the TMDL is the responsibility of owners/operators of lands containing domestic animals. The implementation program does not specify the means of compliance with the TMDL. The Water Board is prohibited by Section 13360 of the California Water Code from specifying the manner of compliance with its orders. Rather, the implementation plan establishes a process for achieving the TMDL, including: 1) identifying parties responsible for taking these actions 2) actions expected to reduce pathogen loading; 3) mechanisms by which the Central Coast Water Board will assure these actions are taken; 4) reporting and evaluation requirements that will indicate progress toward completing the actions; 5) and a timeline for completion of implementation actions. The implementation program will involve an adaptive management approach.

In accordance with the California Impaired Waters policy the Water Board may exercise its independent discretion to certify that a nonregulatory action will correct the impairment if supported by findings in the record. The Impaired Waters Guidance explicitly states that the fact that the Regional Boards have limited resources to accomplish their water quality mission can and should be used as a basis to encourage non-regulatory entities to undertake to abate impairments in the time before the Water Boards may otherwise be able to address them through a formal regulatory program. On these occasions the Water Board may not always need to adopt its own implementation program, but may instead rely upon the program adopted by the other entity. When doing so, the RWQCB should establish the TMDL via a formal recognition which certifies that RWQCB has determined that the other entity's program will comply with the TMDL and attain standards. This approach is consistent with the State Water Resources Control Board's Impaired Waters Guidance which states: *"Employing these abbreviated procedures when warranted is a matter of efficiency and resource allocation. California is obligated to establish and implement 800 or more TMDLs over the next ten years for over 1,800 pollutant/water body combinations. Given to the extent California can consolidate regulatory actions or eliminate unnecessary regulatory processes when fulfilling our obligations under Section 303(d), the State and Regional Boards can expedite their responsibility to address and correct impaired waters in California, and expend resources on more TMDLs instead of redundant processes."*

Note that certifying a non-regulatory response to implement a TMDL does not preclude the Water Board's authority to develop a regulatory response, should the non-regulatory action be ultimately deemed inadequate to implement the TMDL. Consistent with the State Water Resources Control Board's policy and guidance for developing TMDLs (see Section 6.3.1), where appropriate the Water Board may exercise its independent discretion to certify non-regulatory actions to implement a TMDL; however, when Water Board priorities and resources are available to commence regulatory action on an unresolved nonpoint source impairment, the Water Board is obligated to use the permitting authorities as outlined in the Nonpoint Source Implementation and Enforcement policy (see Section 6.3.3)

Accordingly, staff proposes that the Water Board certify the California Rangeland Water Quality Management Plan (Rangeland Plan) as the mechanism for implementing this TMDL. Note that in accordance with the Impaired Waters Guidance, the Water Board may use its independent discretion to implement TMDLs through Memorandums of Understanding (MOUs), Management Agency Agreements (MAAs), or Water Quality Management Plans (WQMP). Examples of TMDLs that have been implemented by using MOUs, MAAs, or WQMPs include *Salmon River Temperature TMDL, 2006* (MOU with U.S. Forest Service), *San Joaquin River at Vernalis Salt and Boron TMDL, 2008* (MAA with U.S. Bureau of Reclamation), and the *Indian Creek Reservoir TMDL, 2002* (Rangeland Plan for non-federal grazing lands).

The California Rangeland Water Quality Management Plan was accepted by the State Board in 1995. The grazing industry gave its support to the California Rangeland Plan (SWRCB Resolution No. 95-43). Further, the State formally recognized and incorporated California Rangeland Plan for private rangelands in the SWRCB Nonpoint Source Program Plan (see Section 6.3.2). The SWRCB Nonpoint Source Program Plan identifies the California Rangeland Water Quality Management Plan (along with several other MOUs, MAAs, and WQMPs) as recognized and viable nonpoint source pollution control tools (see Table 10 –*Summary of Existing MAAs and MOUs* located in *Plan for California's Nonpoint Source Pollution Control Program*, SWRCB 2000).

The Rangeland Plan also provides that where beneficial uses of water are impaired or threatened, as determined by the Water Board, ranch owners shall assess and report to the Water Board the impact of their operations on beneficial uses; show the existence of a viable Rangeland Plan with implementation underway; prepare and implement a nonpoint source management plan (as described in section 2.b. or the Rangeland Plan); or contact the NRCS, RCD, UC Cooperative Extension, or a qualified resource professional of their choice, to schedule an assessment and begin development of a Rangeland Plan.

#### **6.4.1 For Control of Pathogen Loading - Milestones**

The implementation process will include the following actions and milestones.

- 1) By five years after final approval of the TMDL, Water Board staff and stakeholders will identify specific sites within the TMDL project area contributing controllable fecal coliform loads to San Lorenzo Creek that need management measures for pathogen control. Problem assessment and planning for management measure implementation on non-federal rangelands will follow the implementation procedures in the California Rangeland Water Quality Management Plan (July 1995).

- 2) By eight years after final approval of the TMDL, depending on progress toward management measure implementation under the 1995 California Rangeland Water Quality Management Plan and the 2000 California Nonpoint Source Plan, staff will consider the need for regulatory action to ensure implementation of management measures to control external sources of fecal coliform loading to San Lorenzo Creek.
- 3) By 12 years from the date the TMDL becomes effective (which is upon approval by the Water Board), management practices will be fully implemented for nonpoint sources of fecal coliform loading and the load the allocations, and therefore the TMDL, will be achieved

In accordance with Section 13360 of the California Water Code the Water Board cannot mandate or designate the specific types of on-site actions necessary to reduce indicator bacteria loading, or to meet allocations by the various responsible parties. Potential implementation measures identified in the California Rangeland Water Quality Management Plan (1995) include:

1. LIVESTOCK MANAGMENT

Practices which assist with the control, time, frequency, or intensity of grazing to maintain vegetative cover sufficient to protect the soil and maintain or improve the quantity and quality of desired vegetation (e.g. prescribed grazing, feeding and salting locations, etc.)

2. STRUCTURAL IMPROVEMENTS

Infrastructure improvements (e.g. water development, fencing, erosion control, etc.) and structures associated with normal livestock production operations (barns, sheds, corrals, shipping pens, etc.) may be used to facilitate grazing management. These practices should be planned, constructed, and utilized in a manner that enhances or maintains water quality.

3. LAND TREATMENT

Land treatments (e.g. burning, mechanical manipulation, seeding, weed control, fertilization, etc.) may be used to manage vegetation, reduce erosion, improve range or improve wildlife habitat.

4. LIVESTOCK HEALTH

Practices used to reduce internal/external parasites and pathogens.

Potential implementation measures are also identified in the *California Nonpoint Source Program Plan (2000) - California Management Measures for Polluted Runoff (CAMMPR)*, as reproduced below:

**Grazing Management.** Management Measure 1E is intended to protect sensitive areas (including streambanks, lakes, wetlands, estuaries, and riparian zones) by reducing direct loadings of animal wastes and sediment. This may include restricting or rotationally grazing livestock in sensitive areas by providing fencing, livestock stream crossings, and by locating salt, shade, and alternative drinking sources away from sensitive areas. Upland erosion can be reduced by, among other methods: (1) maintaining the land consistent with the California Rangeland Water Quality Management Plan or Bureau of Land Management and Forest Service activity plans or (2) applying the range and pasture components of a Resource Management System (NRCS FOTG). This may include prescribed grazing, seeding, gully erosion control, such as grade stabilization structures and ponds, and other critical area treatment.

## 6.5 Monitoring and Reporting

Consistent with the California Rangeland Water Quality Management Plan (Rangeland Plan), implementation will be conducted in concert with monitoring and reporting to the Water Board, so that progress in achieving the TMDL can be demonstrated.

The primary measure of success for this TMDL is attainment or continuous progress toward attainment of the TMDL targets and load allocations. However, in evaluating successful implementation of this TMDL, attainment of trackable implementation actions will also be heavily relied upon. Therefore, staff proposes a two-phased approach to monitoring for this TMDL:

- 1) Monitoring of implementation of actions; and
- 2) Water quality monitoring

Staff proposes to focus on implementation monitoring during the early years of TMDL implementation. Staff anticipates that water quality response to improved management practices will not occur or be demonstrated until after improved management practices are implemented. Staff will work with implementing parties to develop a suite of monitoring and reporting methods consistent with the California Rangeland Plan that could include self-assessment site inspections, photo monitoring by implementing parties, water quality testing, reporting of land and animal management practices implemented, and other methods that will assist in achieving water quality improvements and allow the Water Board to track/verify the implementation of management practices. Staff will work with parties responsible for monitoring when the implementation and monitoring phase of the project commences, and will make revisions, if appropriate, to the proposed monitoring plan outlined below.

### 6.5.1 Implementation Monitoring

In accordance with the California Rangeland Water Quality Management Plan (RWQMP), where beneficial uses have been impaired as determined by the Water Board, land owners/operators contributing to the impairment will be asked by the Water Board to:

1. assess the impact of their operations on beneficial uses, and
2. prepare and implement a nonpoint source management plan as described in section 2b, approach #2 or #3, of the RWQMP;

or,

1. show existence of a viable RWQMP with implementation underway, or

2. contact the NRCS, RCD, UCCE, or a qualified resource professional of their choice, to schedule an assessment and begin development of a RWQMP.

Consistent with the California Rangeland Water Quality Management Plan (RWQMP), if owners/operators contributing to the impairment do not respond to the Water Board's request to develop and implement a viable RWQMP or nonpoint source management plan; do not demonstrate the existence of a viable RWQMP with implementation underway, and/or do not demonstrate a good faith effort towards implementation of recommended management practices where appropriate, the Water Board will require the appropriate technical information or reports to be submitted via authorities granted to the Water Board in Section 13267 of the Porter Cologne Water Quality Control Act.

### **6.5.2 Water Quality Monitoring**

Staff anticipates that water quality response to improved management practices will not occur or be demonstrated until after management practices are implemented. Accordingly, after significant progress on improved management practices has been demonstrated/implemented, Central Coast Water Board will request that the responsible parties perform fecal coliform monitoring in receiving waters to verify progress towards TMDL achievement. Water Board staff will work with parties responsible for monitoring regarding the scope and timelines for submission of water quality monitoring data. Landowners have the option of performing individual monitoring or participating in a cooperative monitoring program. Monitoring may be done in concert with, or supplemented by the Water Board's CCAMP existing five-year rotational monitoring in the project area, or with other appropriate monitoring entities. If necessary, the Water Board will require the collection and submission of water quality monitoring data pursuant to authorities granted in Section 13267 of the Porter Cologne Water Quality Control Act.

The following monitoring plan proposes specific monitoring sites, frequency, and indicators to be monitored. To limit the burden of monitoring to the minimum amount necessary to evaluate attainment of the TMDL and compliance with allocations, at this time staff propose a receiving water monitoring location at the following location, shown in Table 6-2. This site is appropriate to assess TMDL compliance because this creek reach has sustained or perennial flows (refer back to Figure 2-4) which are necessary to evaluate the 30-day geometric mean water quality objective.

At this time, due to the size of the watershed, and limited water quality data primarily available from only one site (309LOR) the spatial extent of the impairment is not known. If appropriate, staff will work with implementing parties to select additional or alternate indicator bacteria monitoring site(s), to establish baseline water quality conditions in the watershed, subject to Executive Officer approval. Potential additional monitoring sites are identified in Table 6-3. These sites were identified because they potentially provide baseline conditions for two major upgradient tributary drainages: the upper San Lorenzo Creek, and Lower Lewis Creek drainages (refer back to Figure 2-1), as well as a site capturing MS4 drainage. It should be noted these proposed baseline monitoring sites may not appropriate for TMDL compliance monitoring, as they evidently do not have sustained or perennial flows (refer back to Figure 2-4) necessary to evaluate the 30-day geometric mean water quality objective.

Table 6-2. Proposed monitoring location for assessing TMDL compliance.

Site Code	Waterbody	Site Location	Latitude	Longitude
309LOR <sup>A</sup>	San Lorenzo Creek	Lower San Lorenzo Creek at Bitterwater Road	36.267315	-121.068303

<sup>A</sup> Central Coast Ambient Monitoring Program (CCAMP) Site Code

Table 6-3. Additional proposed monitoring sites/areas to establish watershed baseline conditions.

Waterbody	Site Location	Notes
Upper San Lorenzo Creek	Upper San Lorenzo Creek subwatershed: (Hydrologic Unit Code 180600051002)	Baseline monitoring to establish upstream extent of impairment
Lower Lewis Creek	Lower Lewis Creek subwatershed near confluence with San Lorenzo Creek: (Hydrologic Unit Code 180600050905)	Baseline monitoring to establish upstream extent of impairment
Lower San Lorenzo Creek	Near creek confluence with Salinas River upstream to creek mile 1	Establish contribution to indicator bacteria impairment by MS4 discharges from King City.

The monitoring frequency required at a receiving water site must satisfy the minimum number of samples needed to evaluate compliance with the Basin Plan water quality objective for indicator organisms in REC-1 waters (five samples must be drawn in a 30-day period). As such, responsible parties will monitor receiving waters according to the following schedule:

Receiving Waters – Five samples from each monitoring site collected over one 30-day period in each of the following seasons:

- ✓ Wet Season: December 1 – March 31
- ✓ Dry Season: May 1 – September 30

The wet season time frame of December 1 to March 31 was identified because precipitation data show that mean rainfall intensity in the project area is greatest from December through March (see NCDC King City weather station 044555 data available at <http://www.wrcc.dri.edu/coopmap/>).

If five samples are not collected or available for the 30-day averaging period, the available data shall be evaluated consistent with Section 6.1.5.6 of the SWRCB Listing Policy (SWRCB, 2004)

Also, individual landowner monitoring can comprise either water quality monitoring or other forms of monitoring (such as a report documenting visual site inspections supported by site photos). Central Coast Water Board staff will review data annually to determine compliance with the TMDL. If the Executive Officer determines additional monitoring is needed, the Executive Officer shall request it pursuant to applicable sections of the California Water Code.

## 6.6 Timeline and Milestones

### 6.6.1 Timeline to Achieve Loading Capacity

Staff anticipates that the allocations, and therefore the TMDL, will be achieved 12 years from the date the TMDL becomes effective (which is upon approval by the USEPA). This estimation is in part based on the amount of time necessary to identifying responsible parties of the nonpoint source prohibition. The estimation is also based on the uncertainty of the time required for in-stream water quality improvements resulting from management practices to be

realized. Staff anticipates that the full in-stream positive effect of all the management measures will be realized gradually, and progress towards achieving load allocations will be evaluated consistent with the timeline milestones presented in Section 6.4.1.

The Central Coast Water Board will consider additional requirements if implementation of management practices do not result in achievement of water quality objectives.

### **6.6.2 Evaluation of Progress**

It is important to monitor water quality progress, track TMDL implementation, and modify TMDLs and implementation plans as necessary, in order to assess trends in water quality to ensure that improvement is being made; oversee TMDL implementation to ensure that implementation measures are being carried out; address any uncertainty in various aspects of TMDL development; and ensure that the TMDL remains effective, given changes that may occur in the watershed after TMDL development.

The primary measure of success for this TMDL is attainment or continuous progress toward attainment of the TMDL targets and load allocations. However, in evaluating successful implementation of this TMDL, attainment of trackable implementation actions will also be heavily relied upon. Therefore, we propose two types of monitoring for this TMDL: 1) water quality monitoring, and 2) monitoring of implementation of actions.

Water Board staff will perform annual reviews of implementation actions, monitoring results, and evaluations submitted by responsible parties of their progress towards achieving their allocations. The Central Coast Water Board will use information submitted by implementing parties (as outlined in previously in Section 6.5), Central Coast Ambient Monitoring Program data, and other available information to determine progress toward implementing required actions and achieving the allocations and the numeric target.

Responsible parties will continue monitoring and reporting according to this plan for at least eight years, at which time the Water Board staff will determine the need for continuing or otherwise modifying the monitoring requirements. Additionally, within eight years of TMDL adoption staff will consider the need for regulatory action to ensure implementation of management measures to control fecal coliform loads consistent with the timeline presented in Section 6.4.1.

Responsible parties may also demonstrate that although water quality objectives are not being achieved in receiving waters, controllable sources of pathogens are not contributing to the exceedance. If this is the case, the Water Board staff may re-evaluate the numeric target and allocations. For example, the Water Board staff may consider the need for a site-specific objective. The site-specific objective would be based on evidence that natural, or background sources alone were the cause of exceedances of the Basin Plan water quality objective for fecal indicator bacteria.

Annual reviews will continue until the water quality objectives are achieved, or another regulatory action establishes alternative requirements. The compliance schedule for achieving the allocations and numeric target required under these TMDLs is ten years after the date of approval by the Central Coast Water Board.



## 6.7 Cost Estimates and Funding Sources

Staff provides estimates of total implementation costs below in Appendix J: *Cost Estimates*. These costs are approximations and come with significant uncertainties, since the number of properties that will require implementation is unknown, and also because the Water Board cannot mandate or designate the specific types of on-site actions necessary to reduce indicator bacteria loading, or to meet allocations by the various responsible parties.

Potential sources of financing to TMDL implementing parties are also provided in Appendix J: *Cost Estimates*.

## 7 PUBLIC PARTICIPATION

Staff conducted stakeholder outreach efforts for these TMDL projects. Staff scheduled public workshops in San Luis Obispo (January 20, 2011) and King City (February 9, 2011) and engaged with interested persons during the development of the TMDL. Interested persons that participated in TMDL development workshops and outreach included representatives from the following:

- California Cattlemen's Association
- University of California Cooperative Extension
- Hearst Ranch
- California Polytechnic University
- District Representative for State Senator Sam Blakeslee
- Commercial ranches and private landowners
- San Luis Obispo Farm Bureau
- San Luis Obispo County Cattlemen's Association
- Monterey County Cattlemen's Association

This Staff Report, Executive Officer Certification Order, and technical project reports were made available for a 45-day formal public comment commencing on February 3, 2011. Comments provided at workshops during the public comment period will be considered prior to issuing the final TMDL certification.

## REFERENCES

- Avery, S.M., A. Moore, and M.L. Hutchison. 2004. Fate of Escherichia coli originating from livestock faeces deposited directly onto pasture. Letters in Applied Microbiology, 38, pp. 355-359.
- Baxter-Potter, W.R., and Gilliland, M.W. (1988). Bacterial pollution in runoff from agricultural lands. Journal of Environmental Quality, vol. 17, pp. 27-34.
- California Central Coast Regional Water Quality Control Board. Water Quality Control Plan, Central Coast Region.
- California Department of Fish and Game Waterfowl Hunt Results Report. Accessed March 2009 at <http://www.dfg.ca.gov/wildlife/waterfowl/shoot/>
- California Department of Forestry and Fire Protection. 1997. Historic 1977 California Vegetation (CALVEG)
- California Department of Water Resources. 1997. Land Use Survey, spatial data. Available at <http://www.water.ca.gov/landwateruse/lusrvymain.cfm>
- California Food Emergency Response Team (CalFERT). 2007. Investigation of an Escherichia coli O157:H7 Outbreak Associated with Dole Pre-Packaged Spinach. March 21, 2007. Accessed March 23, 2007 at <http://www.dhs.ca.gov/ps/fdb/local/PDF/2006%20Spinach%20Report%20Final%20redacted.PDF>
- Carmel River Watershed Council (CRWC). 2004. Creek Assessment. Accessed Nov. 2010 at <http://www.carmelriverwatershed.org/WA/pfc.html>
- Central Coast Water Board. 2010. Total Maximum Daily Load for Fecal Coliform for the Lower Salinas River Watershed.
- Cleland, Bruce, 2002. Load Duration Curve spreadsheet tools, available at Indiana Department of Environmental Management. Accessed August 2008 at <http://www.in.gov/idem/4685.htm>
- City of King (City). 2010. National Pollutant Discharge Elimination System (NPDES) Phase II Storm Water Management Program.
- City of Raleigh, Public Works Department. 2003. Drainage Basin Studies, Little Brier Creek. Accessed May 2009 at: [http://www.raleighnc.org/publications/Public\\_Works/Stormwater\\_Management/Drainage\\_Basin\\_Studies/Little\\_Brier\\_Creek/Little\\_Brier\\_Creek\\_Section4.pdf](http://www.raleighnc.org/publications/Public_Works/Stormwater_Management/Drainage_Basin_Studies/Little_Brier_Creek/Little_Brier_Creek_Section4.pdf)
- Collins, R. S. Elliot, and R. Adams. 2005. Overland flow delivery of faecal bacteria to a headwater pastoral stream. Journal of Applied Microbiology. Vol. 99, pp. 126-132.

- Friends of the Earth, Inc. v. EPA, et al., No. 05-5015, D.C. Cir. 2006. Accessed Dec. 2010 at <http://caselaw.findlaw.com/us-dc-circuit/1466400.html>.
- Gannon, J., M. Busse, and J. Schillenger. 1983. Fecal Coliform Disappearance in a River Impoundment. Water Resources, vol. 17(11), pp. 1595-1601.
- Gibson, C. 2005. Schematic Processor Bacterial Loadings Model. University of Texas at Austin, Center for Research in Water Resources, Department of Civil Engineering. Accessed May 2009 at <http://www.crrw.utexas.edu/gis/qishydro05/Modeling/WaterQualityModeling/BacteriaModel.htm>
- Guan, Tat. and R. Holley. 2003. Pathogen Survival in Swine Manure Environments and Transmission of Human Enteric Illness – A Review. Journal of Environmental Quality, vol. 32, pp. 383-392.
- Horsley and Witten, Inc. 1996. Final Report: Identification and Evaluation of Nutrient and Bacterial Loadings to Maquiot Bay, Brunswick, and Freeport, Maine. January 1996.
- Jamieson, R. C., D. Joy, H. Lee, R. Kostaschuck, and R. Gordon. 2005. Resuspension of Sediment-Associated *Escherichia coli* in a Natural Stream. Journal of Environmental Quality, (34), pp. 581-589.
- Keen JE, Wittum TE, Dunn JR, Bono JL, Durso LM. Shiga-toxigenic *Escherichia coli* O157 in agricultural fair livestock, United States. Emerging Infectious Diseases [serial on the Internet]. 2006 May. Accessed May 2009 at <http://www.cdc.gov/ncidod/EID/vol12no05/05-0984.htm>
- US-LT RCD (Upper Salinas-Las Tablas Resource Conservation District). 2002. Upper Salinas River Watershed Action Plan.
- Malloway G. and Sanders, C.R.. 2003. Fish Rescues from the Carmel River Tributaries: Annual Report to the Interested Agencies and Participants. in - Waterways, the Carmel River Watershed News Newsletter Volume II Issue I January 2003 - March 2003
- Mayer, R. and Olsen, S. Iowa State University Extension. 2005. Estimated Costs for Livestock Fencing. File B-175. Accessed Nov. 2010 at <http://www.extension.iastate.edu/publications/fm1855.pdf>
- Minnesota Pollution Control Agency. 2002. Regional Total Maximum Daily Load Evaluation of Fecal Coliform Bacteria Impairments In the Lower Mississippi River Basin in Minnesota.
- Minnesota State University, Water Resources Center. 2007. Fecal Coliform TMDL Assessment for 21 Impaired Streams in the Blue Earth River Basin. Water Resources Center Publication No. 07-01.
- Mississippi Dept. of Environmental Quality. 2000. Fecal Coliform TMDL for the Big Black River Basin, Mississippi.
- Montana Department of Environmental Quality. 2009. Big Hole River Watershed Nutrient TMDL, Appendix 1.
- National Land Cover Dataset (NLCD). 2001. GIS spatial data, available at <http://www.mrlc.gov/>.

- New Jersey Dept. of Environmental Protection. 2008. Technical Manual for Special Water Resource Protection Area, Functional Value Analysis. Accessed February 2009 at [www.nj.gov/dep/stormwater/docs/fva080124.pdf](http://www.nj.gov/dep/stormwater/docs/fva080124.pdf)
- Monterey County Resources Conservation District, 2006. Reconciling Food Safety and Environmental Protection: A Literature Review. First Edition, October 2006.
- National Agricultural Statistics Service (NASS) database. 2007 Agricultural Census. ([www.nass.usda.gov](http://www.nass.usda.gov)).
- Oklahoma Dept. of Environmental Quality. 2006. TMDL Development for Cobb Creek Watershed.
- Rosen, B. 2000. Waterborne Pathogens in Agricultural Watersheds. NRCS, Watershed Science Institute, University of Vermont.
- Shaver, E., Horner R., Skupien J., May C., and Ridley G. 2007. Fundamentals of Urban Runoff Management – Technical and Institutional Issues (2<sup>nd</sup> Edition)
- Smith, D., Newman M., Watson F., and Hameister J. 2004. Physical and Hydrologic Assessment of the Carmel River Watershed California. The Watershed Institute, California State University Monterey Bay, Report No. WI-2004-05/2.
- State Water Resources Control Board (SWRCB). 2002. Proration of U.S. Geological Survey Streamflow Data. In, Example Format for WAA/CFII Report: Water Availability Analysis (WAA) for Application or Petition on Application.
- State Water Resources Control Board (SWRCB). 2004. Water Quality Control Policy for Developing California's Clean Water Act Section 303(d) List.
- State Water Resources Control Board. (SWRCB). 2005. State of California SB. 469 TNDL guidance a process for addressing impaired waters in California. Approved by Resolution 2005-0050.
- Stiles, T. and Cleland, B. 2003. Using Duration Curves in TMDL Development & Implementation Planning. Accessed Nov. 2010 at [http://www.in.gov/idem/tmdl\\_durationcurveshscall.pdf](http://www.in.gov/idem/tmdl_durationcurveshscall.pdf).
- USEPA (U.S. Environmental Protection Agency). 1986. Ambient Water Quality Criteria for Bacteria – 1986. EPA 440/5-84-002. US Environmental Protection Agency, Office of Water, Washington DC.
- USEPA. January 2001. Protocol for developing pathogen TMDLs. EPA 841-R-00-002.
- USEPA. 2002. Establishing Total Maximum Daily Load (TMDL) Wasteload Allocations (WLAs) for Storm Water Sources and NPDES Permit Requirements Based on those WLAs. Office of Water, Memorandum, Nov. 22, 2002. Accessed June 2009 at <http://www.epa.gov/npdes/pubs/final-wwtmdl.pdf>

USEPA. 2007(a). Options for Expressing Daily Loads in TMDLs. USEPA Office of Wetlands, Oceans, and Watersheds, Draft Guidance, June 22, 2007.

USEPA. 2007(b) An Approach for Using Load Duration Curves in Developing TMDLs. Office of Wetlands, Oceans, and Watersheds. EPA 841-B-07-006. August 2007.

USEPA. 2010. EPA's Approval Letter and Enclosure for California's 2008-2010 303(d) List. Available at <http://www.epa.gov/region9/water/tmdl/303d-pdf/EPAsPartial-Approval-Partial-Disapproval-Ltr-Enclos-Ca2008-2010-303dList.pdf>.

Wuertz, S. and A. Schriewer. 2009. Scientific Peer Review of (1) TMDL for Fecal Coliform for Salinas River Watershed and (2) Removal of the Shellfish Harvesting Beneficial Use from the Salinas River Lagoon (North), Old Salinas River, and Tembladero Slough. (Unpublished).

<b>APPENDIX A: WATER QUALITY DATA AND FIELD NOTES</b>
---

Sampling Site	Date	Fecal Coliform Concentration (mpn/100mL)	<i>E. Coli</i> Concentration (mpn/100mL)	Total Coliform Concentration (mpn/100mL)	Sampling Entity
309LOK	4/7/1999	2600		24000	CCAMP
309LOK	1/25/2000	23000		300000	CCAMP
309LOK	3/1/2006	1400	4400	50000	CCAMP
309LOK	3/27/2006	1600	500	1600	CCAMP
309LOK	4/24/2006	300	100	50000	CCAMP
309LOK	5/22/2006	11000	4600	30000	CCAMP
309LOR	2/2/1999	300		3000	CCAMP
309LOR	3/2/1999	500		500	CCAMP
309LOR	4/7/1999	22000		160000	CCAMP
309LOR	7/2/1999	1400		1400	CCAMP
309LOR	7/28/1999	240		300	CCAMP
309LOR	9/1/1999	1400		2200	CCAMP
309LOR	11/2/1999	30		300	CCAMP
309LOR	11/9/1999	80		900	CCAMP
309LOR	12/2/1999	240		300	CCAMP
309LOR	1/6/2000	30		30	CCAMP
309LOR	1/25/2000	80000		280000	CCAMP
309LOR	2/10/2000	700		3000	CCAMP
309LOR	1/25/2006	1300	650	3000	CCAMP
309LOR	3/1/2006	1400	3100	16000	CCAMP
309LOR	3/27/2006	3000	1500	3000	CCAMP
309LOR	4/24/2006	900	250	1600	CCAMP
309LOR	5/22/2006	50000	8300	90000	CCAMP
309LOR	6/20/2006	50	10	110	CCAMP



309LOR	10/17/2006	240	290	500	CCAMP
309LOR	11/7/2006	130	97	240	CCAMP
309LOR	12/11/2006	130	63	170	CCAMP
309LOR	1/9/2007	27	24	170	CCAMP
309LOR	2/13/2007	23	52	170	CCAMP

CCAMP = Central Coast Ambient Monitoring Program


### CCAMP Field Notes

SiteTag	Date/Time	Notes
309LOR	3/2/99 11:00	Conductivity not reported
309LOR	4/6/99 11:50	clear skies
309LOR	4/7/99 9:45	bacteria sample only
309LOR	5/13/99 10:00	DRY
309LOR	6/3/99 12:05	DRY
309LOR	7/28/99 14:15	clear skies
309LOR	11/2/99 12:35	fog until 10:30, when clear skies, lab samples are labeled LOK
309LOR	12/2/99 10:30	clear skies and warm
309LOR	1/25/00 13:35	very turbid, <1cm visibility
309LOR	1/25/06 13:01	water color-Slightly yellow. Water clarity=clear. Hand sampled mid channel. Evidence of recent scour. Sign of cows. Raccoon prints, bear scat
309LOR	3/1/06 13:01	water color-brown. water clarity-murky. Hand sampled thalweg. Evidence of cattle in creek. Sample collected ~ 300m d/s of USGS gauge
309LOR	3/27/06 13:34	water color-colorless. water clarity-cloudy. Hand sampled mid channel. Trash=100+. Clothes dumped on right bank. Site odor-sulfides
309LOR	4/24/06 13:27	water color-colorless. water clarity-clear. Hand sampled mid channel. Site odor-cows
309LOR	5/22/06 12:55	water color-brown-chocolate milk. Water clarity-murky. Hand sampled mid channel. Site odor-cows. Sent turbidity to lab-out of calibration range. Chlor a is high due to high turbidity-did not filter
309LOR	6/20/06 13:21	water color-colorless. Water clarity-clear. Hand sampled mid channel.
309LOR	10/17/2006 11:11	water color-colorless. Water clarity-clear. Hand sampled thalweg. Site odor-cows. Evidence of cows on banks and instream
309LOR	11/7/2006 12:02	water color-colorless. Water clarity-clear. Hand sampled thalweg.
309LOR	12/11/2006 12:08	water color-colorless. Water clarity-clear. Hand sampled mid channel. Foam on surface of channel. Sonde did not store-surveyor was dropped in water
309LOR	1/9/2007 12:16	Water color-colorless Water clarity-clear. Hand sampled mid channel.
309LOR	2/13/2007 14:42	Water color-colorless. Water clarity-clear.Hand sampled mid channel. Evidence of cattle on banks and in creek. Foam on surface of water. Cow patties

**APPENDIX B: FLOW DURATION CURVE**

Daily flow records for San Lorenzo Creek are available from USGS gage 11151300 located at Bitterwater Road. Daily flow records from 10/11970 to 10/31/2010 were downloaded from the USGS California Water Science Center, and used in development of flow duration curves. The flow duration summary for the USGS 11151300 flow record as developed for water quality monitoring site 309LOR are presented below.

**San Lorenzo Creek Flow Duration Curve.**

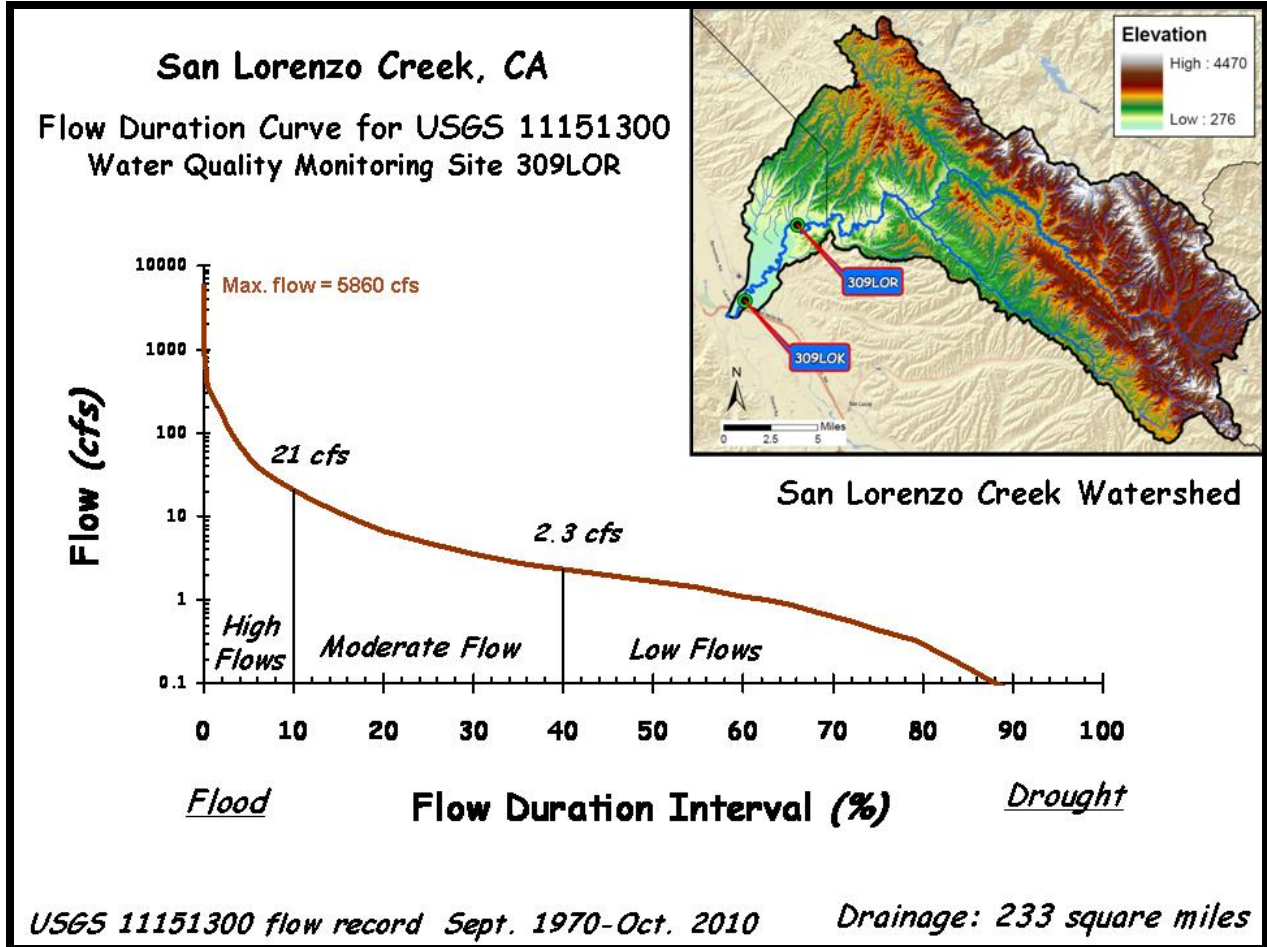


**San Lorenzo Creek Flow Duration Record Summary.**

FLOW DURATION SUMMARY				Station ID: USGS 11151300						
<i>Peak to Low</i>				Station name: USGS 11151300 SAN LORENZO C BL BITTERWATER C NR KING CITY CA						
	<i>cfs</i>	<i>mm</i>		1-day	High	Moist	Mid	Dry	Low	
0.007%	5860.0	23.76	<i>Peak</i>	640	51	5	2	0	0	
0.01%	3272.0	13.27		2.594	0.207	0.019	0.007	0.002	0.000	
0.27%	639.8	2.59	<i>1-day</i>							
1%	268.0	1.09		<i>Average</i>						
5%	51.0	0.21		15						
10%	21.0	0.09		0.061	12.2%	0.9 inches				
15%	11.0	0.04								
20%	6.6	0.03								
25%	4.7	0.02								
30%	3.5	0.01								
35%	2.8	0.01								
40%	2.3	0.01								
45%	2.0	0.01								
50%	1.7	0.007								
55%	1.4	0.01								
60%	1.1	0.00								
65%	0.9	0.00								
70%	0.6	0.00								
75%	0.4	0.00								
80%	0.3	0.00								
85%	0.2	0.00								
90%	0.1	0.00								
95%	0.1	0.00								
99%	0.0	0.00								
100%	0.0	0.000	<i>Low</i>							
12.2%	15.2	0.06	<i>Average</i>							


**APPENDIX C: SUPPLEMENTAL MAPS AND SPATIAL DATA**

**Estimated Mean Annual Precipitation, 1970-2000. (source: PRISM dataset)**

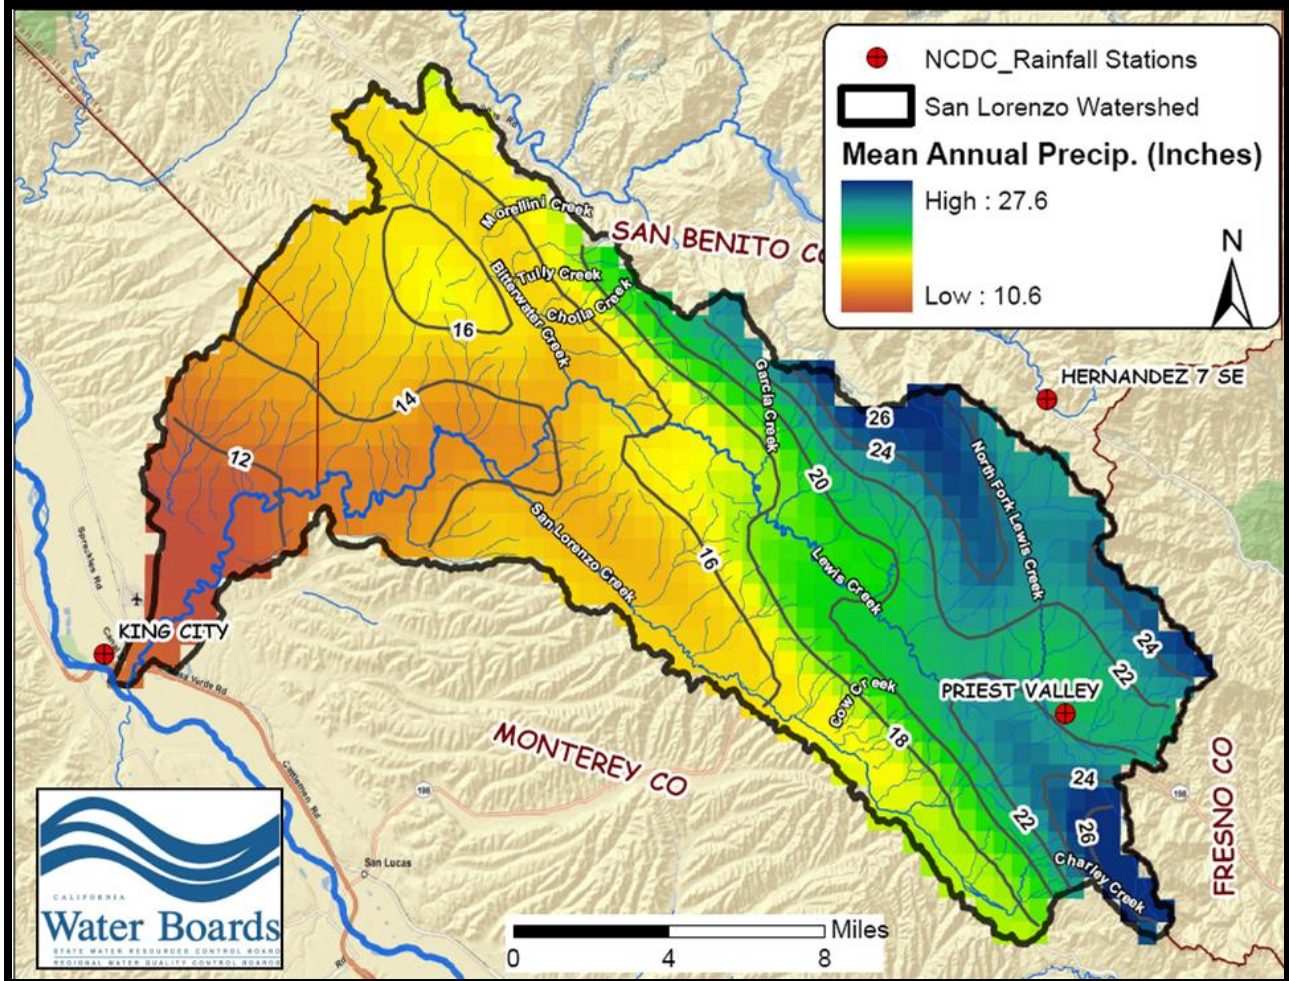




**Precipitation Frequency: NOAA 2-year, 6-hour precipitation frequency map.**

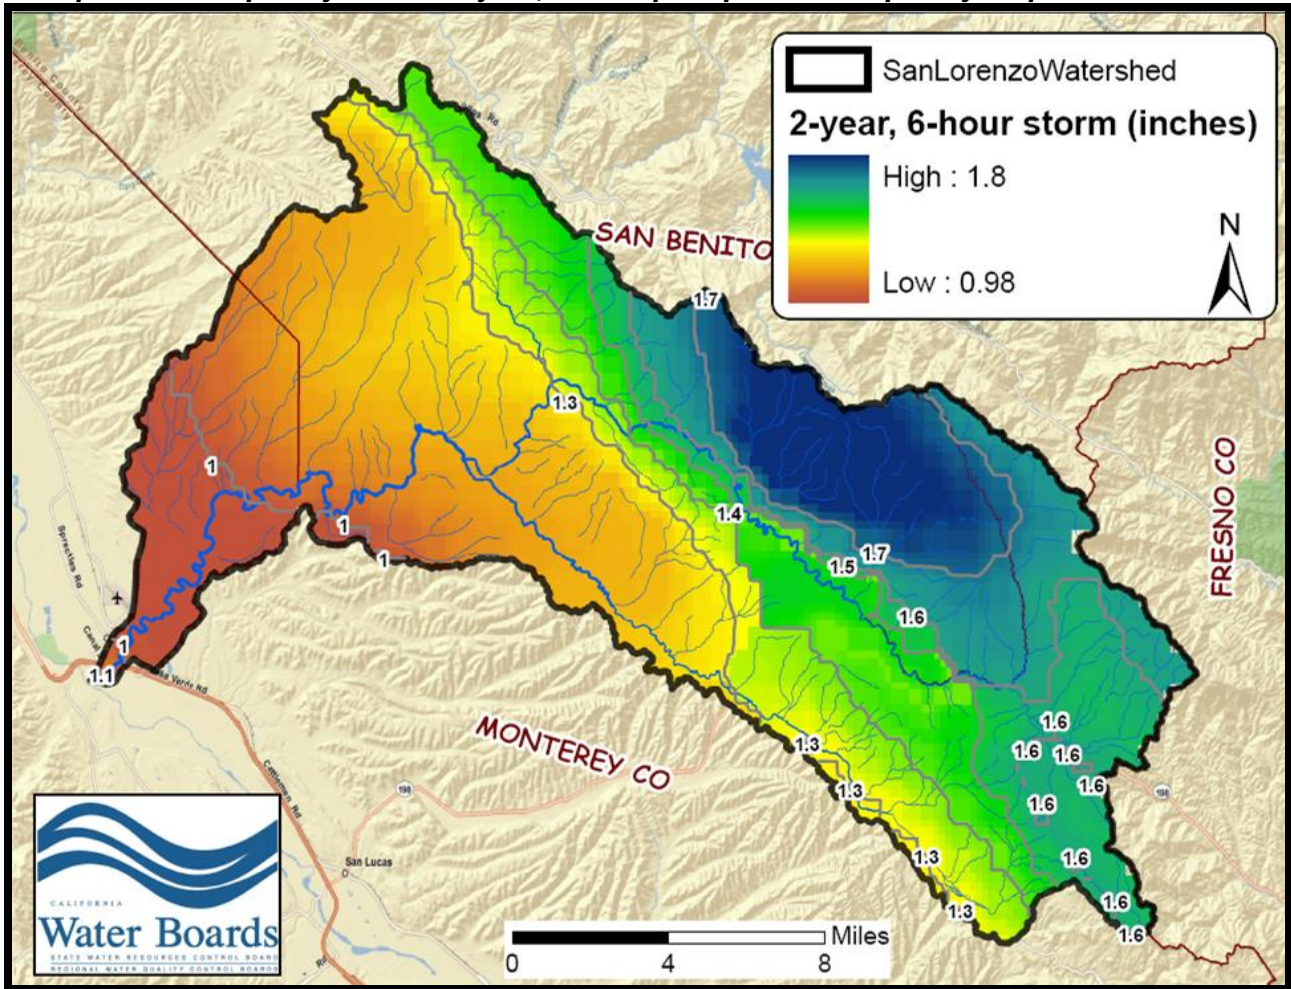


**San Lorenzo Creek Watershed Geology (source: Calif. Division of Mines and Geology).**

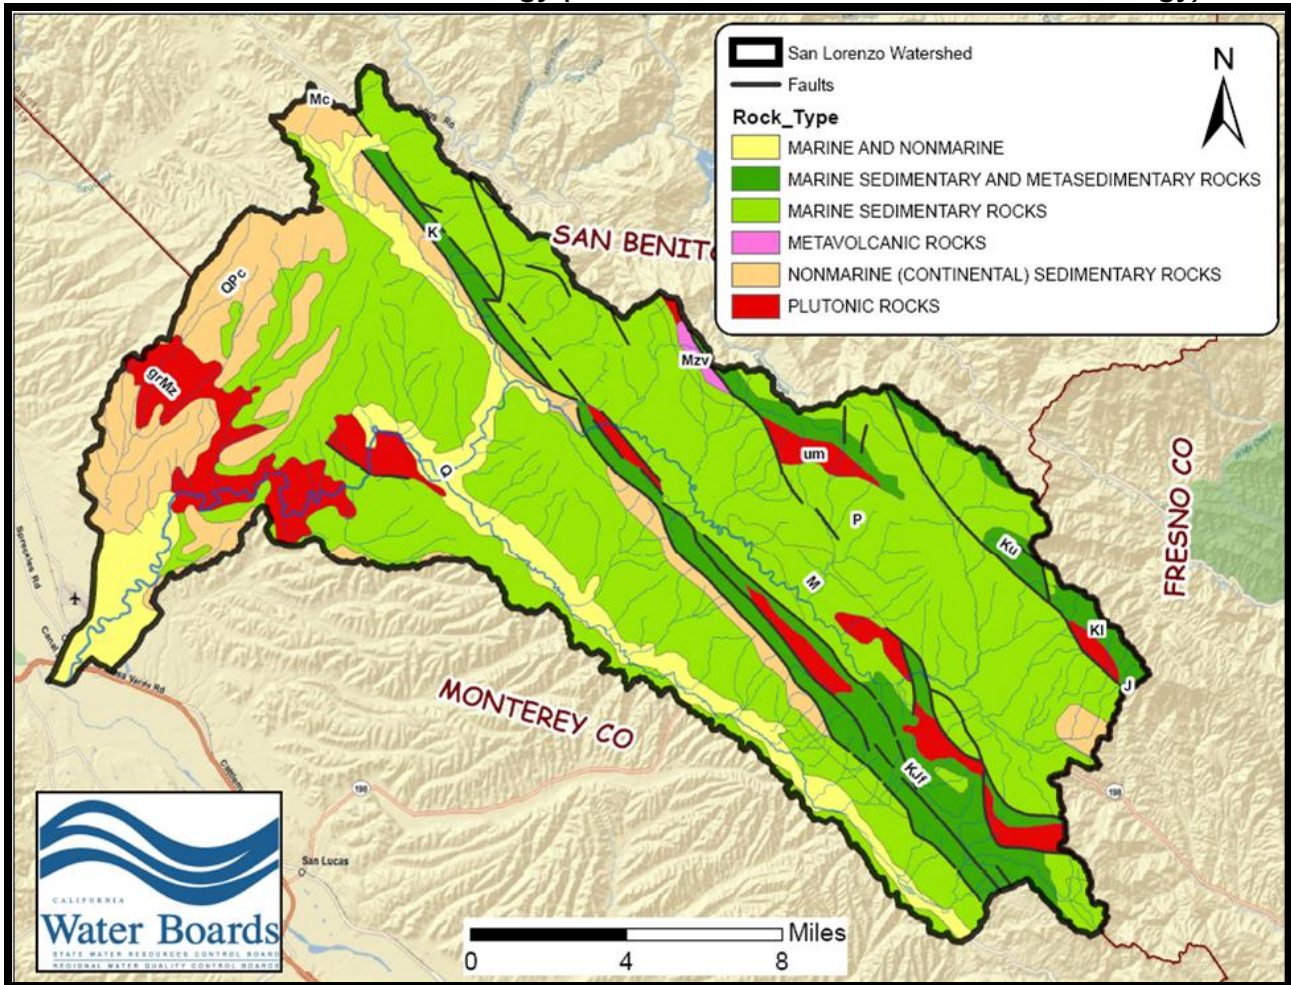



**Hydrologic Soil Groups (source: NRCS-SSURGO).**

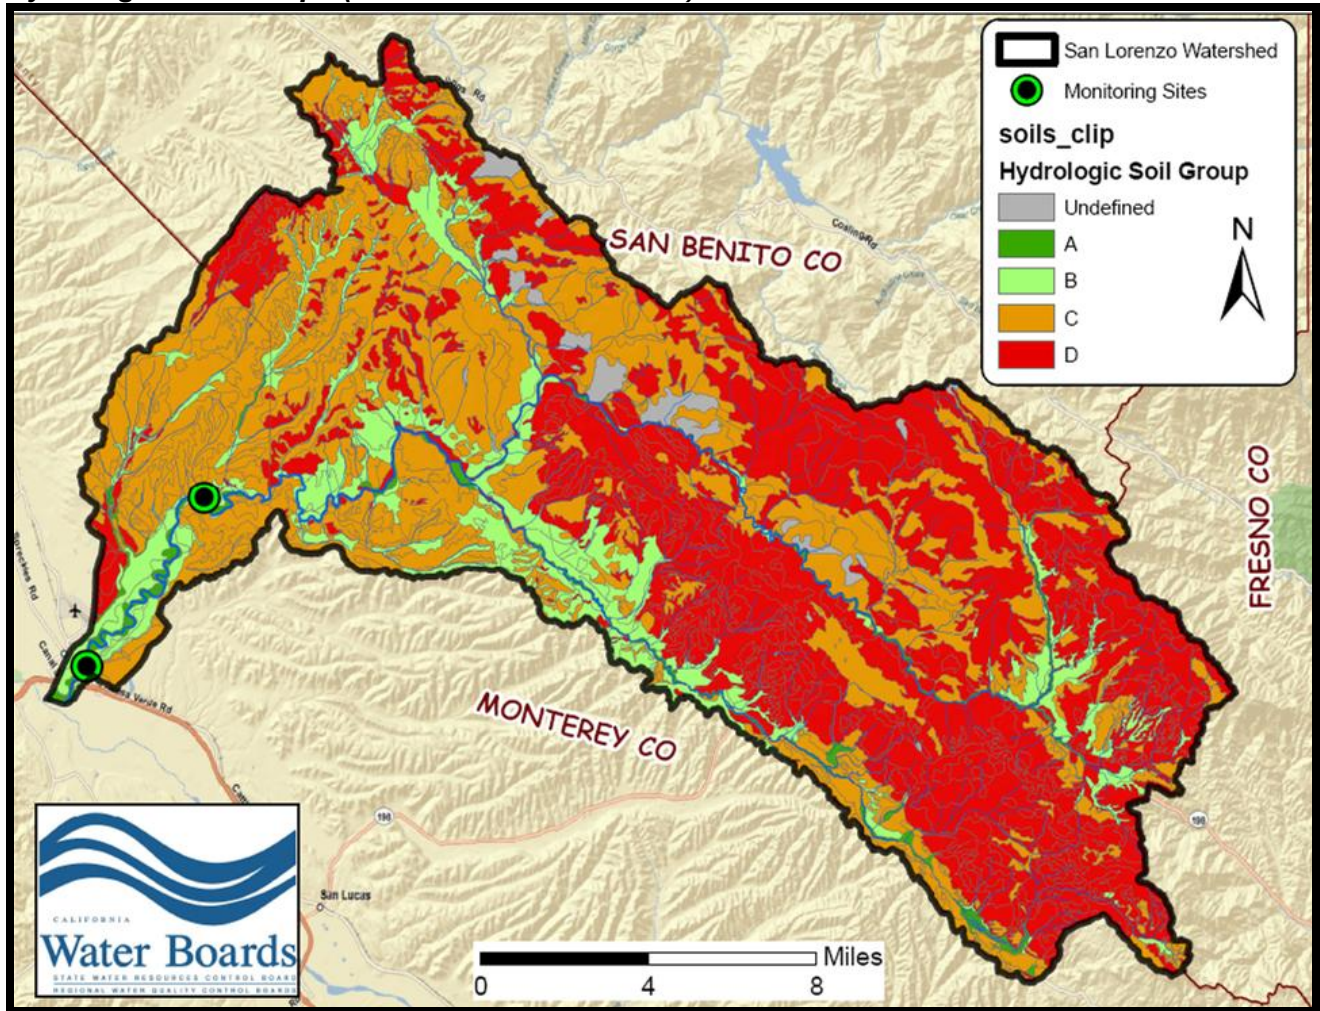


**Hydrologic Soil Group Descriptions:**


<b>A</b>	Well-drained sand and gravel; high permeability
<b>B</b>	Moderate to well-drained; fine to moderately coarse texture; moderate permeability
<b>C</b>	Poor to moderately well-drained; moderately fine to fine texture; slow permeability
<b>D</b>	Poorly drained; clay soils, or shallow soils over nearly impervious layers(s)



**Soil Textures (source: NRCS- SSURGO)**

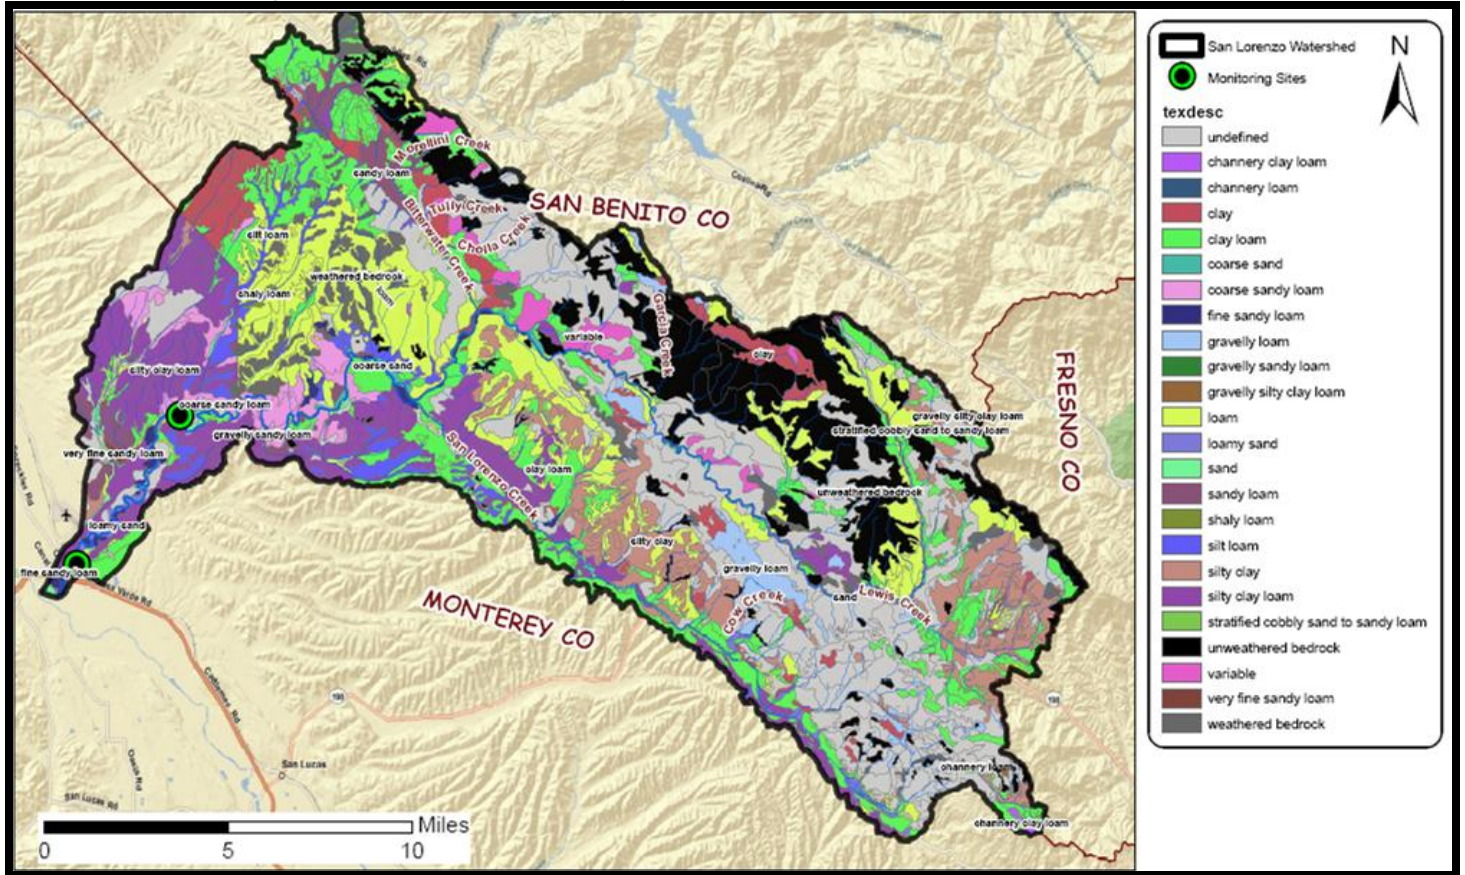


**Percent clay in soils (source: NRCS-SSURGO)**

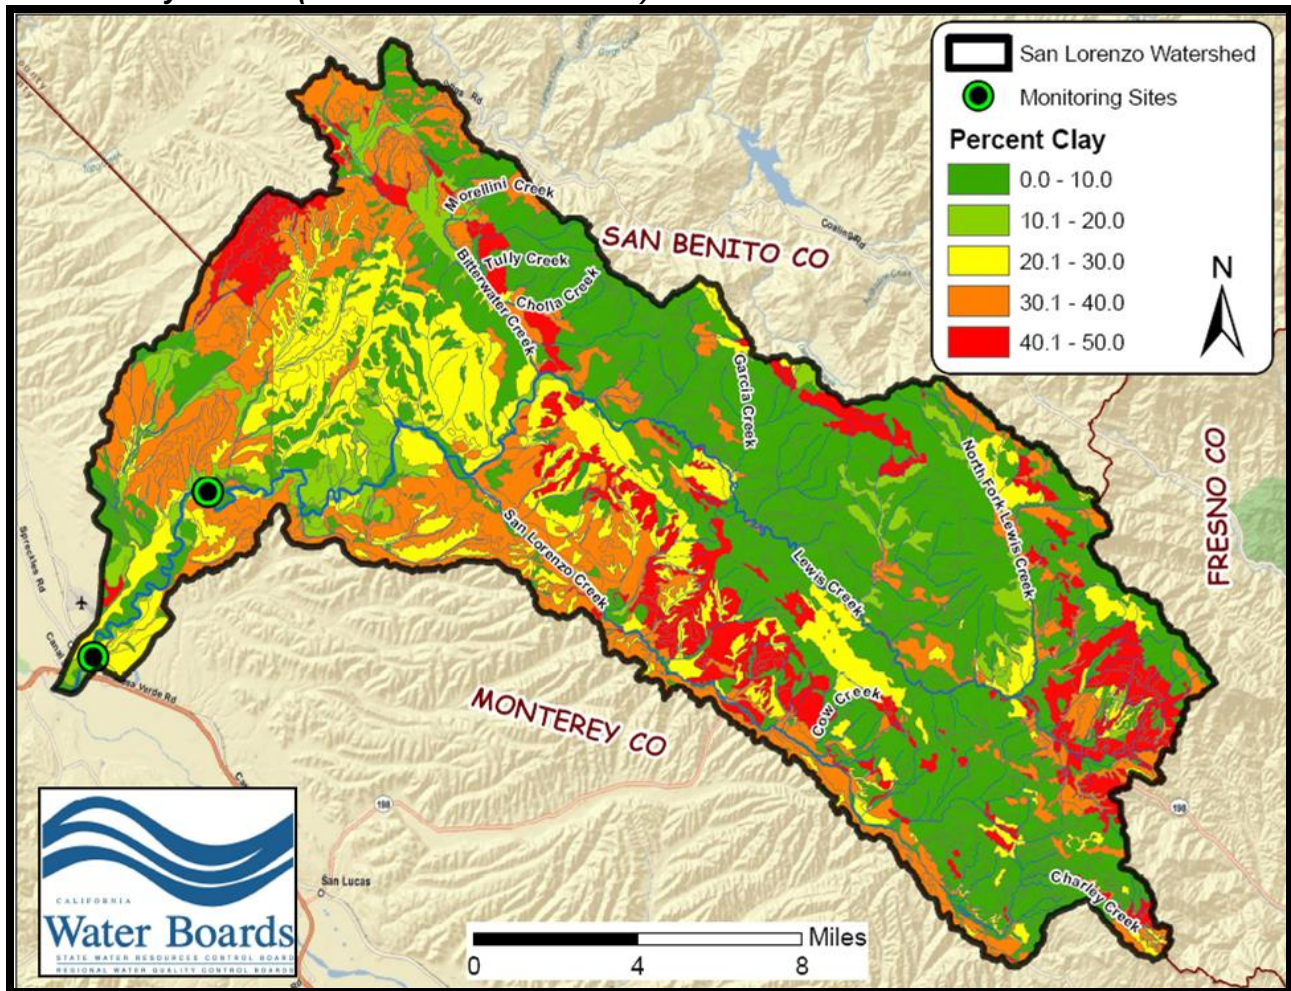



**Land Use-Land Cover (source: National Land Cover Dataset – NLCD, 2001)**

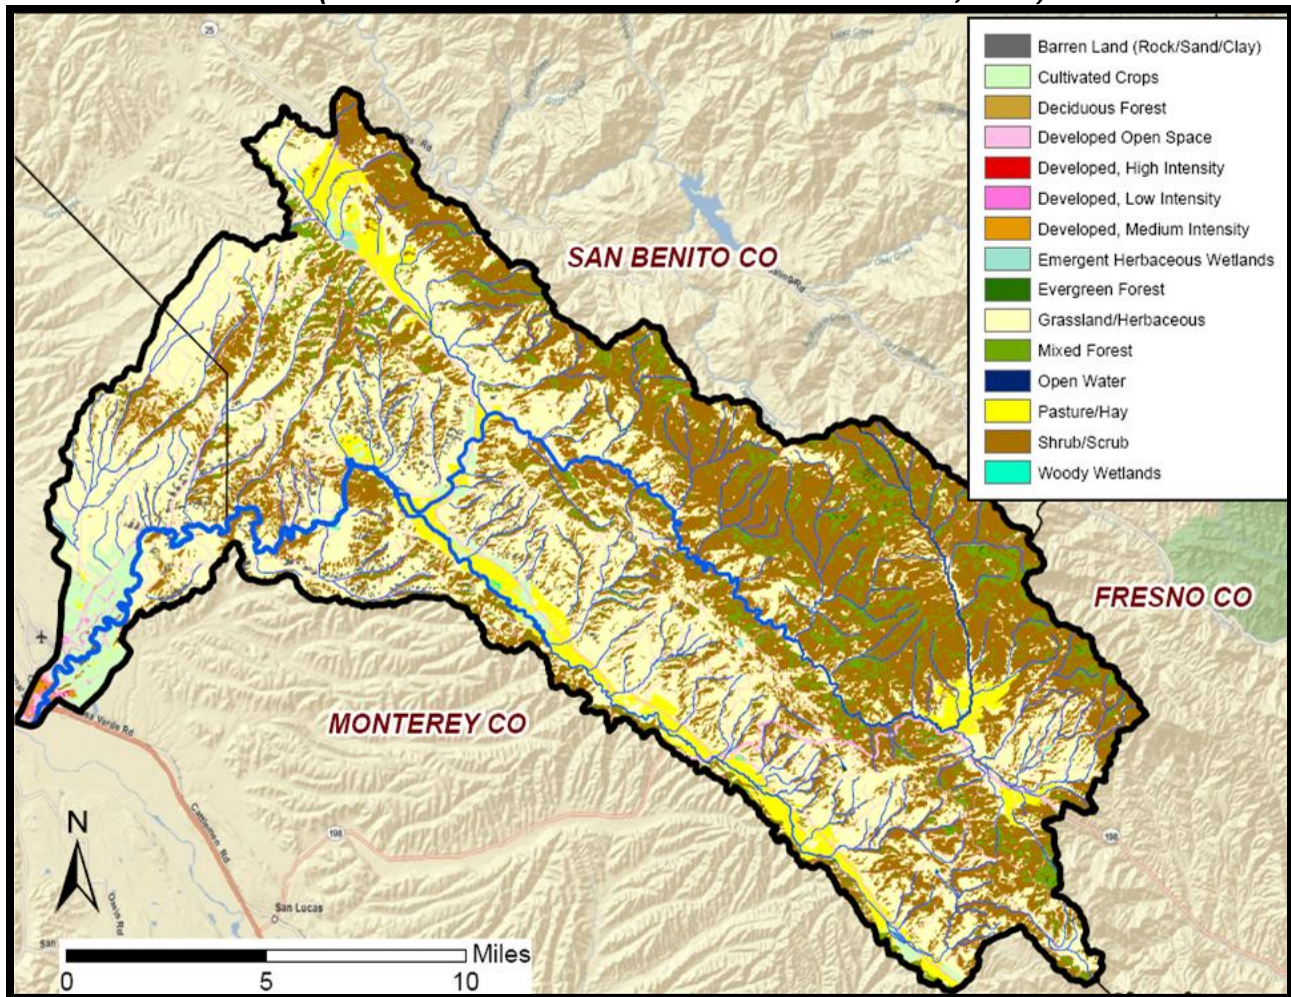

NLCD_CODE	CODE_DESCRIPTION	Acres
11	Open Water	10
21	Developed Open Space	6772
22	Developed, Low Intensity (Rural residential)	210
23	Developed, Medium Intensity	194
24	Developed, High Intensity	16
31	Barren Land (Rock/Sand/Clay)	2067
41	Deciduous Forest	1
42	Evergreen Forest	149
43	Mixed Forest	10150
52	Shrub/Scrub	64479
71	Grassland/Herbaceous	69719
81	Pasture/Hay	8143
82	Cultivated Crops	4479
90	Woody Wetlands	271
95	Emergent Herbaceous Wetlands	182

**APPENDIX D: FECAL COLIFORM PRODUCER INVENTORY DATA**

The data and calculations for estimated domestic animal and wildlife populations in the TMDL project area are presented in this Appendix.

Livestock numbers are derived from the U.S. Department of Agriculture's (USDA) National Agricultural Statistics Service (NASS) census database. NASS provides census inventories of livestock and farm animals on a countywide basis. At the time this project report was written, the most recent version of the NASS Agricultural Census available online was for 2007

Staff used estimation methods for livestock numbers in the project area as recommended in USEPA pathogen TMDL guidance (USEPA, 2001). This method is commonly used in pathogen TMDL development (for example, Mississippi Dept. of Environmental Quality, 2000; Oklahoma Dept. of Environmental Quality, 2006; Montana Dept. of Environmental Quality, 2009). The method is also used by academic researchers involved in water quality studies (for example, Gibson, 2005). The method involves deriving estimated average stocking density (livestock/acre) using county-level livestock numbers available from NASS in conjunction with land use data. In accordance with the USEPA-recognized methodology, staff assumes that livestock are evenly distributed throughout all rangeland and/or pasture in the county. To obtain an average animal stocking density, the number of livestock in Monterey County were obtained from the USDA Agricultural Census database, and divided by the amount of rangeland and/or pasture in Monterey County (source: FMMP land use data, 2008). This yielded an average county-level animal stocking density per acre. This average stocking density/acre value was then multiplied by the acreage of rangeland and pasture within the San Lorenzo Creek watershed project area to obtain the livestock numbers shown in Table 4-1.

The number of people and the number of households in the watershed is estimated from census block data in the U.S. Census Bureau 2000 decennial census. Note that census blocks boundaries don't necessarily coincide with watershed boundaries; as such staff digitally clipped electronic shape files of the census blocks which are located completely within the boundaries of the San Lorenzo Creek watershed, and then extracted population attribute information from the digitally clipped census blocks.

Census data for onsite disposal systems (OSDS – also known as septic tanks), and the number of households on public sewers was obtained from block group data in the 1990 Decennial Census.

Most communities do not have data on the number of households that own dogs, cats, or horses. Therefore the numbers of dogs and cats in the project area were estimated from the American Veterinary Medical Association's U.S. Pet Ownership and Demographics Sourcebook (AMVA, 2007), in conjunction with housing data from the U.S. Census Bureau. Staff used household-to-pet ratios reported by AMVA to estimate the number of pets in the project area. For example, AMVA (2007) reports that 37.2% of households own dogs. The average number of dogs owned by these households is 1.7. Therefore, the number of dogs can be estimated by the following calculation: number of dogs = (total number of households in area of interest) x 0.372 (i.e., the ratio of households that own dogs) x 1.7.

Horse ownership statistics have also been reported by AMVA (2007); however AMVA provides national statistical averages for horse ownership. Staff recognizes that the AMVA national-average reporting may bias the estimates of horse ownership towards urban demographics. The San Lorenzo Creek watershed however, is overwhelmingly rural and staff recognizes that rural household ownership of horses is generally much higher than urban household horse ownership. Consequently, staff estimates the horse population in the San Lorenzo Creek watershed based on horse ownership rural demographics reported by the American Horse Council Federation (2005), in conjunction with U.S. Census Bureau housing data.

Wildlife populations are estimated from animal population densities available from the California Department of Fish and Game (CDFG), from other agencies or from credible peer-reviewed scientific sources shown in

Table 4-1. Additionally, Water Board staff interviewed CDFG staff for information, and used published CDFG reporting. For the majority of wildlife species inventoried in the project report, staff used population density estimates that were based on Monterey County-specific, central coast region-specific, or California-specific reporting. Using these numbers, habitat densities (animals/unit area) were derived, and it was assumed that the distribution of animals was spread uniformly across all suitable habitat. To obtain wildlife populations, staff multiplied the animal population density estimates by the acreage of suitable habitat obtained from digital land cover data. The habitat ranges, habitat requirements, and seasonality of wildlife species shown in Table 4-1 were corroborated with digital databases and literature available from the CDFG Wildlife Habitat Relation System, found online at: [www.dfg.ca.gov/biogeodata/cwhr/](http://www.dfg.ca.gov/biogeodata/cwhr/).

## Domestic Animals: Livestock and Farm Animals

### Project area estimates for numbers of domestic animals.

Livestock	Land Use	Density per Acre	Acres in Watershed	Total Livestock
Cattle	Grass Land (NLCD, 2001)	0.050	69719	<b>3486</b>
Sheep	Pasture, Rural Residential, Cropland (NLCD, 2001)	0.0284	12832	<b>364</b>
Hogs	Pasture, Rural Residential, Cropland (NLCD, 2001)	0.0029	12832	<b>37</b>
Goats	Pasture, Rural Residential, Cropland (NLCD, 2001)	0.0173	12832	<b>222</b>
Chicken (broiler)	Pasture, Rural Residential, Cropland (NLCD, 2001)	0.0007	12832	<b>9</b>
Chicken (layer)	Pasture, Rural Residential, Cropland (NLCD, 2001)	0.0583	12832	<b>748</b>

	Average Rural Household Horse Ownership / California	Households in Watershed	Total Horses
Horses	0.48 (see horse estimate methodology below)*	172	<b>83</b>

-Source of average stocking densities: Number of animals in County from National Agricultural Statistics Service (2007)

-Source of Land Use data: Grassland, Cropland, Pasture and Residential (National Land Cover Dataset, 2001).

-Source of Housing Data: U.S. Census Bureau 2000 Decennial Census (note: for horse ownership, only households located in rural census blocks were tabulated)

**\*ESTIMATED AVERAGE NUMBER OF HORSES OWNED BY RURAL HOUSEHOLDS IN CALIFORNIA:**

- 57% of all horses are located in rural areas or small communities (source: American Horse Council Federation, 2005 as reported at: [http://www.horseproperties.net/horse\\_statistics.html](http://www.horseproperties.net/horse_statistics.html))
- There are 700,000 horses estimated in the state of California (source, American Horse Council Federation June 29, 2005)
- Therefore, of California's 700,000 horses,, 399,000 horses (i.e., 57% of total California horses) are located in rural areas.
- There are 826,662 housing units in rural areas of California. (source, Census 2000 Decennial Census at: [http://factfinder.census.gov/servlet/DatasetMainPageServlet?\\_program=DEC&\\_submenuId=datasets\\_1&\\_lang=en](http://factfinder.census.gov/servlet/DatasetMainPageServlet?_program=DEC&_submenuId=datasets_1&_lang=en))
- Therefore, the average number of horses owned by California rural households is::

$$(399,000 \text{ horses}) / (826,662 \text{ rural households}) = \mathbf{0.48 \text{ horses per rural household.}}$$

## Domestic Animals: Pets

---

### Project area estimates for numbers of pets.

	Percent of households owning	Total households in TMDL project area	Project area households Owning cats or dogs	Average number owned per household	Total Animals in TMDL Project Area
Dogs	37.2%	903	336	1.7	<b>571</b>
Cats	32.4%	903	293	2.2	<b>644</b>

-Source: American Veterinary Medical Association's U.S. Pet Ownership and Demographics Sourcebook (AMVA, 2007), and housing data from U.S. Census Bureau, 2000 Decennial Census.

## Wildlife

---

### Project area land cover distribution for calculating wildlife populations (source FFMP, 2008).

Land Use/Land Cover	Acres
Residential	439
Grazing Land	141,549
Farmland	8539
Forest or Undeveloped	16316
<b>Total</b>	<b>166,843</b>



**Estimated wildlife population densities and habitat requirements.**

Wildlife Type	Reported Population Density Range (animals/mi <sup>2</sup> )	Average Density (animals/mi <sup>2</sup> )	Estimated Population Density (#/per acre)	Land Cover Distribution	Habitat Notes
Deer <sup>A</sup>	4.4 to 7.8	6.1	0.01	Forest, Grazing Land, Farm Land	Prime habitat: Entire watershed
Feral pig <sup>B</sup>	1.3 to 2.1	1.7	0.003	Forest, Grazing Land, Farm Land	Prime habitat: Entire watershed
Coyote <sup>C</sup>	0.75 to 0.91	0.83	0.001	Forest, Grazing Land, Farm Land	Prime habitat: Entire watershed
Raccoon <sup>D</sup>	6 to 52	29	0.045	One-half mile buffer around perennial waterbodies	Prime habitat wetland, riparian, forest. Closely associated with permanent water (e.g., perennial streams). Virginia TMDL program used habitat and population estimate base <sup>d</sup> on 0.5 mile buffer around streams. This buffer range is broadly consistent with home ranges of individual raccoons as reported by CDFG.
Opossum <sup>D</sup>	5.8 to 26.2	16	0.025	One-half mile buffer around perennial waterbodies	Prime habitat wetland, riparian, forest. Closely associated with permanent water. (see raccoon)
Skunk <sup>E</sup>	6.2 to 37	21.6	0.034	One-half mile buffer around perennial waterbodies	Prime habitat wetland, riparian, forest. Closely associated with permanent water. (see raccoon)
Turkey <sup>F</sup>	7 to 9.6	8.3	0.013	Forest, Grazing Land	Entire watershed excluding urban and farmland (trees/shrubs required for roosting habitat)
Pheasant <sup>G</sup>	-	23.5	0.037	Forest, Grazing Land, Farm Land	Pheasant populations on the central coast reportedly are limited to scattered and isolated areas. However, staff reasoned that pheasant populations should be included for Project Area wildlife estimates...see footnote at end of Appendix.
Duck <sup>H</sup>	-	5.5	0.009	Farm Land, Grazing Land, Urban	Cropland, Pasture, Wetland, Urban. Upland forest and shrubland not prime habitat; consequently did not include in grazing lands. Used statewide duck population estimate to interpret gross average watershed population density. Ducks also "much more numerous" in winter, according to DFG.

**Population Density and Habitat Sources**

A: California Dept. of Fish and Game - <http://www.dfg.ca.gov/wildlife/hunting/deer/docs/habitatassessment/part4.pdf>

B: California Dept. of Fish and Game - Game <http://www.dfg.ca.gov/biogeodata/cwhr/cawildlife.aspx>

C Babb and Kennedy, 1989. *An Estimate of Minimum Density for Coyotes in Western Tennessee*, Journal of Wildlife Management Vol. 53 (1): pp 186-188.

D:: Kissel and Kennedy, 1992. *Ecological Relationships of Co-occurring Populations of Opossums and Raccoons*. Journal of Mammalogy, vol. 73, pp. 808-813.

E. Ontario Ministry of Natural Resources. Wildlife Research Service, 1987. *Wild furbearer Management and Conservation in North America*, Chapter 45, Striped, Spotted, Hooded and Hog-Nosed Skunk.

F.: California Dept. of Fish and Game - [http://www.dfg.ca.gov/wildlife/hunting/uplandgame/docs/turkplan\\_04.pdf](http://www.dfg.ca.gov/wildlife/hunting/uplandgame/docs/turkplan_04.pdf)


G: Interpreted from Cal. DWR Interagency Ecological Program - [http://www.iep.ca.gov/suisun\\_eco\\_workgroup/workplan/report/wildlife/pheasant.html](http://www.iep.ca.gov/suisun_eco_workgroup/workplan/report/wildlife/pheasant.html)

H. California Dept. of Fish and Game, 2008 Waterfowl Breeding Population Survey. <http://www.dfg.ca.gov/news/news08/08045.html>  
Geese population interpreted from. California Dept. of Fish and Game, Waterfowl Hunt Comparison Report.

[http://www.dfg.ca.gov/wildlife/waterfowl/shoot/ComparisonTables/docs/HT\\_CMP07.pdf](http://www.dfg.ca.gov/wildlife/waterfowl/shoot/ComparisonTables/docs/HT_CMP07.pdf)



**Project area habitat range for mammals that are closely associated with permanent waterbodies.**

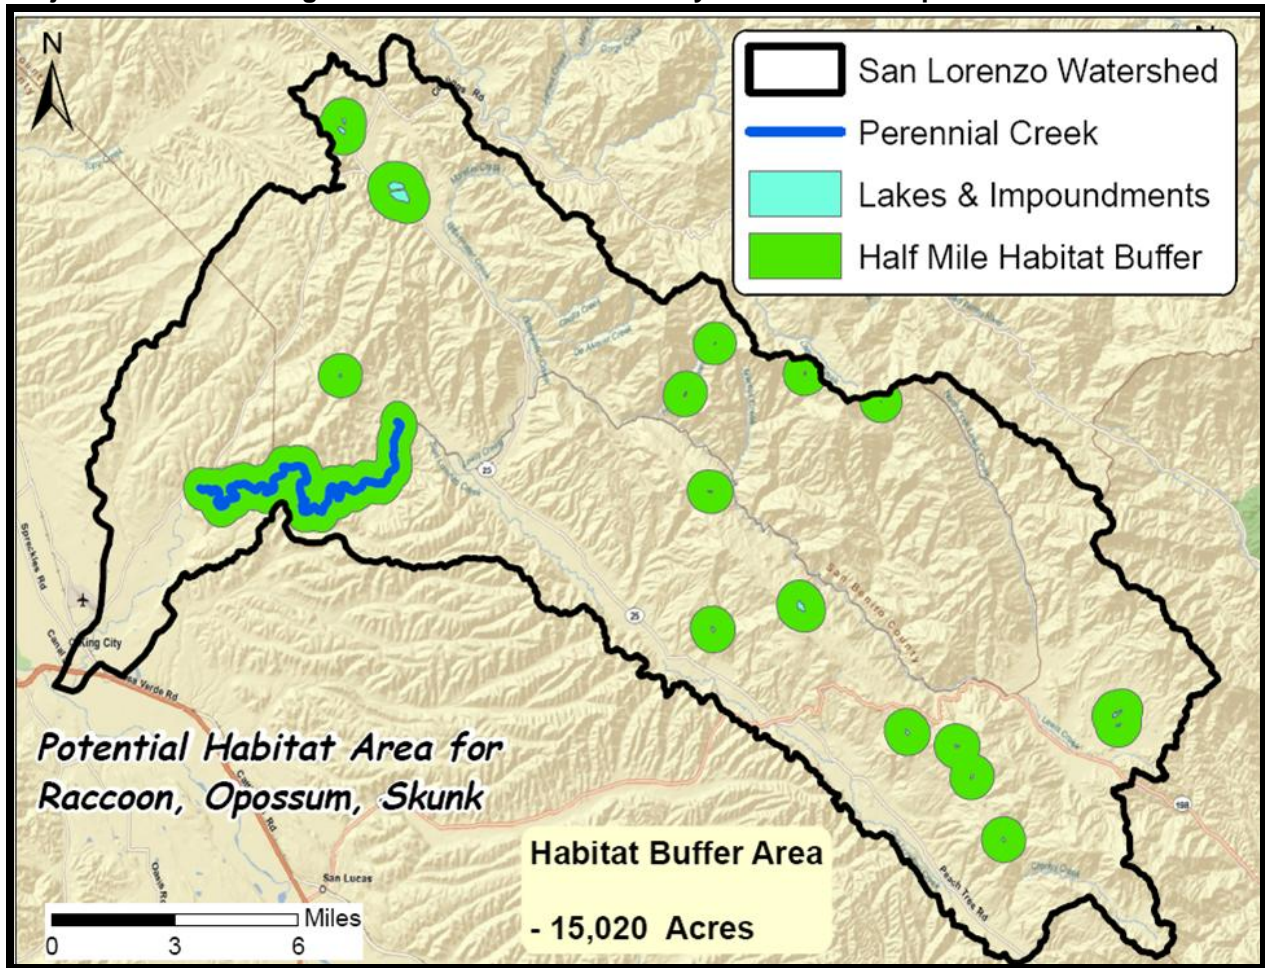

The table below presents the estimated project area population of wildlife based on the habitat and population density outlined above.


**Estimated Populations of Wildlife in TMDL Project Area.**

Wildlife Type	Estimated Population Density (#/per acre)	Habitat: Land Cover Distribution	Acres of Habitat in Project Area	Estimated Project Area Population
Deer	0.01	Forest, Grazing Land, Farm Land	166404	1664
Feral pig	0.003	Forest, Grazing Land, Farm Land	166404	998 <sup>A</sup>
Coyote	0.001	Forest, Grazing Land, Farm Land	166404	166
Raccoon	0.045	One-half mile buffer around perennial waterbodies	15020	676
Opossum	0.025	One-half mile buffer around perennial waterbodies	15020	376
Skunk	0.034	One-half mile buffer around perennial waterbodies	15020	511

Wildlife Type	Estimated Population Density (#/per acre)	Habitat: Land Cover Distribution	Acres of Habitat in Project Area	Estimated Project Area Population
Turkey	0.013	Forest, Grazing Land	157865	2052
Duck	0.009	Farm land, Urban, Forest	25294	228
Pheasant	0.037	Forest, Grazing Land, Farm Land	166404	6157

<sup>A</sup> Based on input from local stakeholders, the feral pig population estimate was doubled (Calif. Dept. of Fish and Game Monterey County feral pig population density estimate X 2)

## Household Sewage Disposal Data

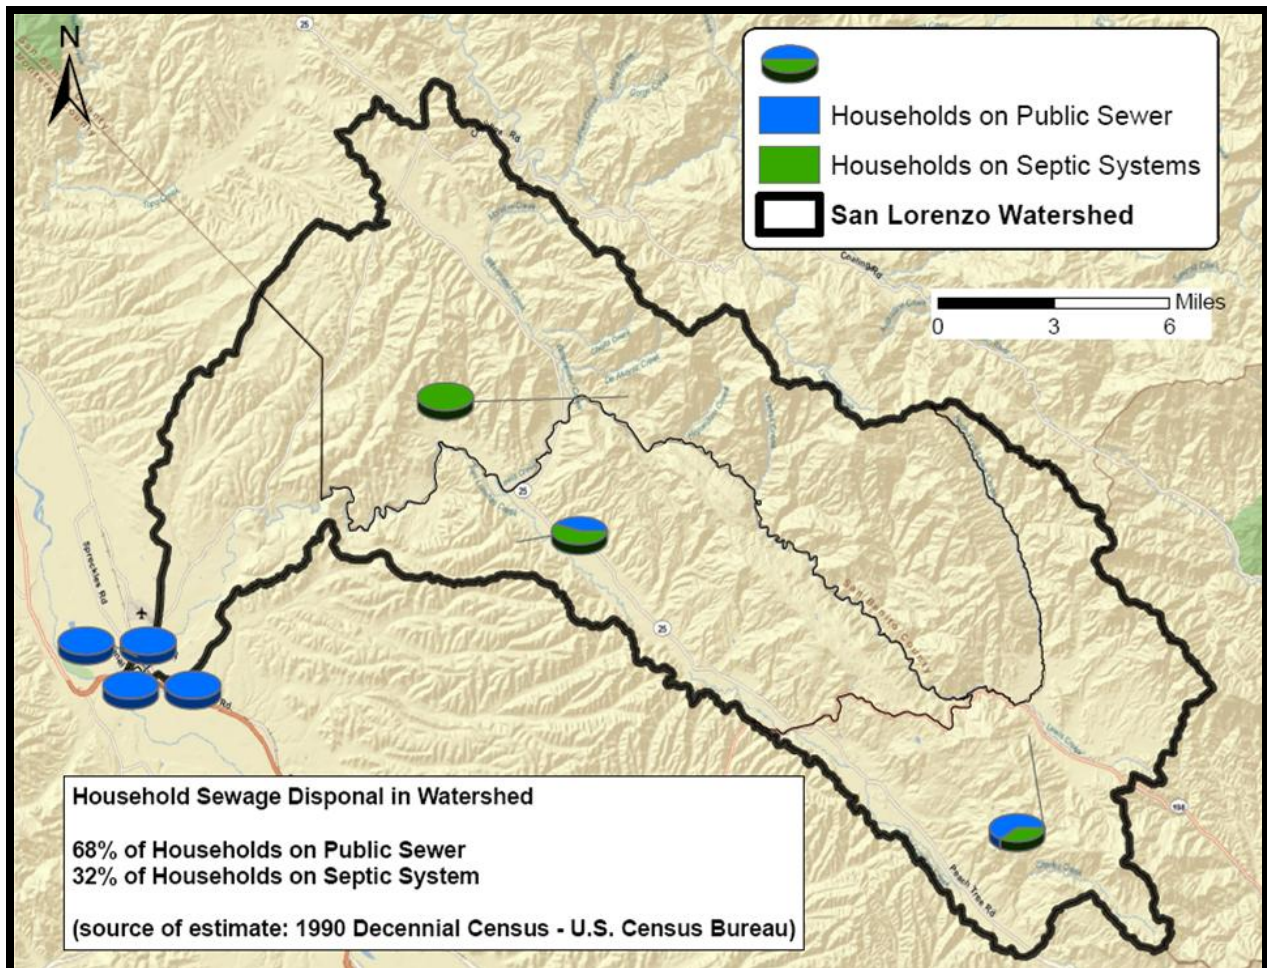




## APPENDIX E: CIWQS DATA: SPILLS AND SANITARY SEWER OVERFLOWS

Place Name: King City Domestic CS				
<a href="#">Violation ID</a>	<a href="#">Description</a>	<a href="#">Status</a>	<a href="#">Violation Date</a>	<a href="#">Linked to Enf Act</a>
<a href="#">835656</a>	Blockage caused a 30 gallon sewage spill at Safeway Store #1232, 530 Canal Street, to the floor in the Deli. No waterbody was affected.	Violation	07/31/2009	No
<a href="#">832266</a>	Electrical outage at pumping station caused a 5000 gallon sewage spill at San Lorenzo Park to the ground. No waterbody was affected. Power restored and spill cleaned up.	Violation	05/05/2009	No
<a href="#">880254</a>	<Other (specify below);PG&E outage due to transformer burnout> caused 5000 gallons of sewage to spill from <Manhole> at <San Lorenzo Park> to <Other (specify below);dirt lot>. No surface water body affected.	Potential	05/04/2009	No
<a href="#">880257</a>	<Pump station failure> caused 200 gallons of sewage to spill from <Manhole> at <Sam lorenzo Park> to <Unpaved surface>. No surface water body affected.	Potential	06/13/2008	No
<a href="#">880259</a>	<Grease deposition (FOG)> caused 200 gallons of sewage to spill from <Manhole> at <212 Pearl Street> to <Other paved surface>. No surface water body affected.	Potential	08/23/2007	No
<a href="#">494031</a>	15,0000 gal. sewage spill from King City WWTP to lettuce field (Mission Ranch). Restore power and unplug gravity line. Disced lettuce field under. Rewire main braker at headworks and maintain overflow gravity line.	Violation	02/26/2007	No

Place Name: KING CITY DOMESTIC WWTF				
<a href="#">Violation ID</a>	<a href="#">Description</a>	<a href="#">Status</a>	<a href="#">Violation Date</a>	<a href="#">Linked to Enf Act</a>
<a href="#">493478</a>	Power went out causing pump to shut off which caused 1500 gal. sewage spill from King City WWTP to treatment facility. Spill contained within facility.	Violation	02/26/2007	No
<a href="#">424510</a>	Failed to submit report by 07/30/2006	Dismissed	07/31/2006	No
<a href="#">367410</a>	Lift station failure caused 1000 gallon sewage spill from 702 S. First St. (Queen's Motel) to land. Repaired lift station and cleaned up spill that same day.	Violation	04/19/2006	No
<a href="#">267477</a>	Failed to submit annual report.	Violation	01/30/2005	Yes

Place Name: KING CITY DOMESTIC WWTF				
<a href="#">222919</a>	Failed to submit monthly monitoring report.	Violation	04/20/2002	No
<a href="#">214774</a>	Failed to submit monthly report.	Violation	04/20/2002	Yes
<a href="#">198175</a>	BO'D violation; max limit is 100mg/l; reported value is 520 mg/l.	Violation	01/21/2002	No
<a href="#">200091</a>	BOD violation; max limit is 100 mg/l; reported value is 520 mg/l.	Violation	01/21/2002	No
<a href="#">183978</a>	Settleable solids (monthly mean) violation; max. limit is 0.8 ml/l; reported value is 0.95 ml/l.	Violation	06/19/2001	No
<a href="#">191118</a>	Settleable solids violation; max limit is 5 mg/l; reported value is 16.6 mg/l.	Violation	06/19/2001	No

**Spills with location information (lat.-longs.)**

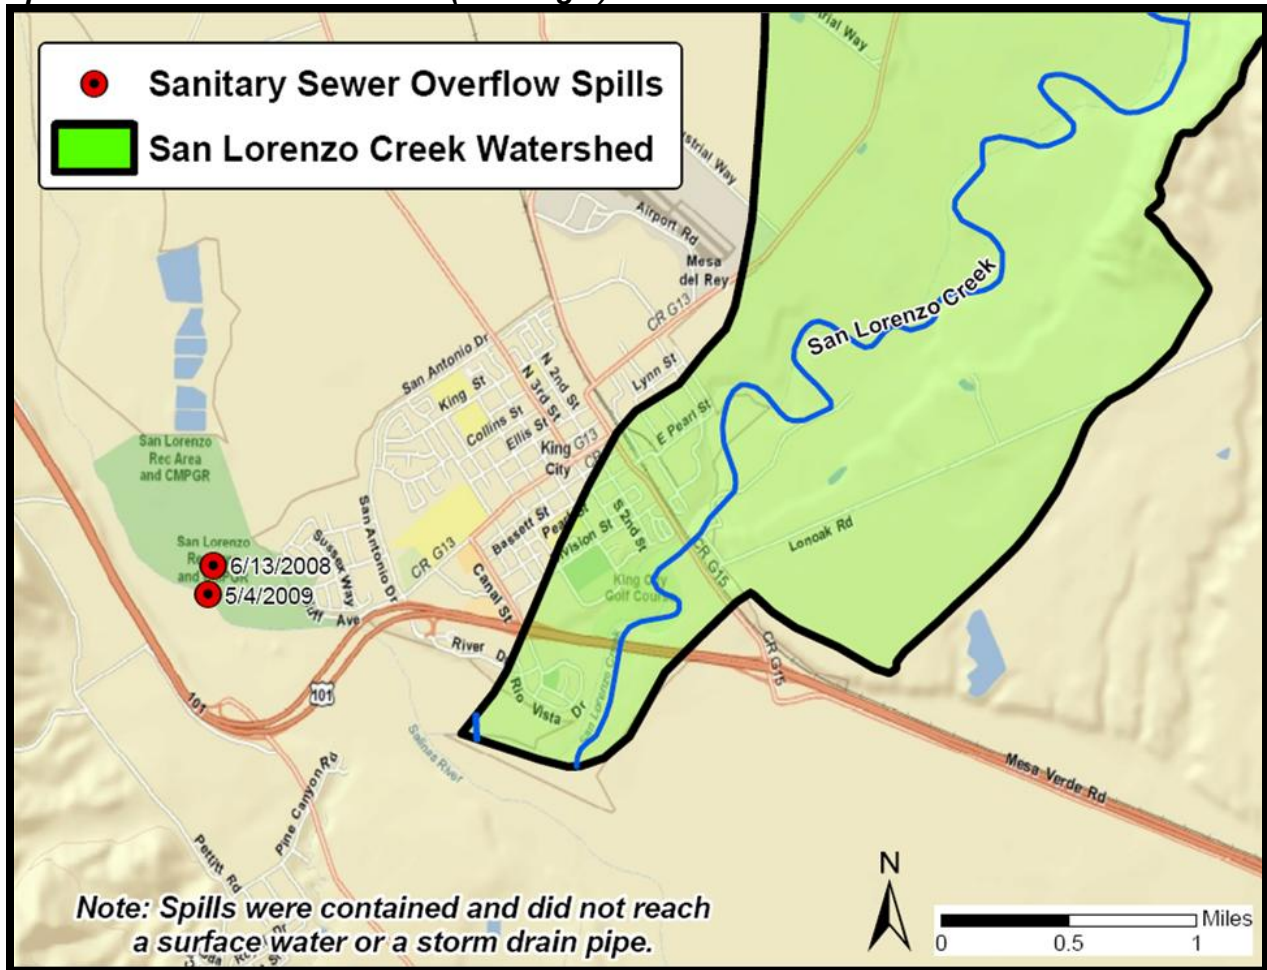

# APPENDIX F: BACTERIA SOURCE LOAD CALCULATOR (BSLC) SPREADSHEETS

## Animal Inventory from BSLC Spreadsheets

Please Enter the Numbers of the Following Animals for Each Subwatershed:

Subwatershed	Cattle			Chickens			Turkeys			Horses	Ewes	Goats
	Dairy	Beef		Layers	Broilers	Broiler Breeders	Toms	Hens	Breeders			
San Lorenzo Creek		3486			9	748				83	364	222

Subwatershed	Deer	Raccoons	Muskrats	Beavers	Geese			Ducks			Wild Turkeys
					Peak	Season 2	Season 3	Peak	Season 2	Season 3	
San Lorenzo C	3328	1052	511		23			228			8209

## Additional Animal Species Inventory from BSLC Spreadsheets

	A	S	T	U	V	W	X	Y	Z	AA
1	Number Special Wildlife:	Return to Animals Sheet								
2	Feral Pig									
3	San Lorenzo Creek	998								
4										
5	Coyote									
6	San Lorenzo Creek	166								
7										
8										
9										

## Land Use Data for BSLC Spreadsheets

Please Enter the Following Information About the Land Uses in Each SubWatershed:

Subwatershed	Total Forest Acreage	Total Cropland Acreage	Total Pasture Acreage	Loafing Lot Time		Pasture 1 Fraction of Total	Pasture 2 Fraction of Total	Pasture 3 Fraction of Total	Stream Access Pasture 1	Stream Access Pasture 2	Stream Access Pasture 3	Straight Pipes
				Dairy	Beef							
San Lorenzo C	16316	8539	141549		0	1			0.2			0




References for BSLC Spreadsheets

G3

These values are used in the loading calculations. You can change the results of the calculations by changing the values for these variables, or keep the defaults.

Reset Values Use Tularcitos Creek Values for Entire Watershed Done



Parameter	Tularcitos Creek	Units	Source
<b>Beef Cow Parameters</b>			
Average weight of beef cow	1000	lb	
Fecal coliform production by 1000-lb beef cow	3.30E+10	total cfu/day-animal	within range of values from literature (Mountain Run TMDL, ASAE Standards, Geldreich)
Ratio of beef cattle on:			Assumed to be 4.2:1 based on information gathered from beef extension specialists at Virginia Tech.
Pasture 1	4	ratio	
to Pasture 2	2	ratio	
to Pasture 3	1	ratio	
Manure excreted by beef cow	60	lb/day-animal	Livestock Waste Facilities Handbook, MWPS - 18
Fraction of cows defecating in stream as compared to the cows that are in/around streams (beef)	0.3	ratio	assumed
<b>Sheep and Goat Parameters</b>			
Ewe Weight	60	lbs	ASAE 1996 Standards: D384.1 DEC93
Lamb Weight	30	lbs	BPJ - 1/2 weight of ewes
Goat Weight	140	lbs	ASAE 1996 Standards: D384.1 DEC93
How many lambs should be associated with each ewe?	2	lambs/ewe	BPJ
Ratio of sheep and goats on:			
Pasture 1	3	ratio	
to Pasture 2	2	ratio	
to Pasture 3	0	ratio	
Fraction of sheep defecating in stream as compared to the sheep that are in/around streams	0	ratio	
Fecal coliform production by 60-lb sheep	1.20E+10	total cfu/day-animal	ASAE 1996 Standards: D384.1 DEC93
<b>Horse Parameter</b>			
Fecal coliform production by 1000-lb horse	4.20E+08	total cfu/day-animal	
Ratio of horses on:			Assume all are on pasture 1 right now
Pasture 1	1	ratio	
to Pasture 2	0	ratio	
to Pasture 3	0	ratio	
Fraction of horses defecating in stream as compared to the horses that are in/around streams	0	ratio	
<b>Poultry Parameters</b>			
Length of layer cycle (including down time)	336	days	
Length of broiler cycle (including down time)	56	days	
Length of turkey cycle (including down time)	70	days	
Manure production by layers	0.256	lb/day-bird	ASAE D384.1 DEC93
Manure production by broilers	0.168	lb/day-bird	ASAE D384.1 DEC93
Manure production by turkeys	0.705	lb/day-bird	ASAE D384.1 DEC93
Fecal coliform production by layers	1.40E+08	cfu/day-bird	ASAE D384.1 DEC93
Fecal coliform production by broilers	8.90E+07	cfu/day-bird	based on relative manure production of layers & broilers
Fecal coliform production by turkeys	9.30E+07	cfu/day-bird	ASAE D384.1 DEC93
Layer litter produced	30	lb/cycle-bird	Va. Nutrient Management Handbook
Broiler litter produced	2.6	lb/cycle-bird	Va. Nutrient Management Handbook
Turkey litter produced	18	lb/cycle-bird	Va. Nutrient Management Handbook
Occupancy Factor for layers	0.959	ratio	
Occupancy Factor for broilers	0.787	ratio	
Occupancy Factor for turkeys	0.865	ratio	
Die-off coefficient for poultry litter	0.035	1/day	Kimberly Panhorst's research
<b>Wildlife Parameters</b>			
Deer fecal coliform produced	3.50E+08	total cfu/day-animal	Yagow (2001) FC and Harlow (1983) forage
Fraction of deer defecating in stream	0.01	ratio	
Raccoon fecal coliform produced	5.00E+07	total cfu/day-animal	
Fraction of raccoons defecating in stream	0.1	ratio	
Muskrat fecal coliform produced	2.50E+07	total cfu/day-animal	Mountain Run TMDL (Yagow, 2001)
Fraction of muskrats defecating in stream	0.25	ratio	
Goose fecal coliform produced	8.00E+08	total cfu/day-animal	Moyer and Hyer, 2003
Fraction of geese defecating in stream	0.25	ratio	
First Month of Goose Peak Season (mm format, e.g., Dec=12)	9	month number	
Last Month of Goose Peak Season (mm format, e.g., Dec=12)	2	month number	
Duck fecal coliform produced	2.40E+09	total cfu/day-animal	ASAE 1996 Standards: D384.1 DEC93
Fraction of ducks defecating in stream	0.25	ratio	
First Month of Duck Peak Season (mm format (e.g., Dec = 12))	9	month number	
Last Month of Duck Peak Season (mm format (e.g., Dec = 12))	2	month number	
Wild Turkey fecal coliform produced	9.30E+07	total cfu/day-animal	
Fraction of wild turkeys defecating in stream	0.01	ratio	
Beaver fecal coliform produced	2.00E+05	total cfu/day-animal	MapTech, 2000
Fraction of beavers defecating in stream	0.5	ratio	

**APPENDIX G: BEDLOADS - BACTERIA LOAD ESTIMATOR SPREADSHEETS (BLEST)**

Loads associated with resuspension of sediment (bedloads) can be estimated using the Bacteria Load Estimation Spreadsheet (BLEST) tool, developed by the Texas Commission on Environmental Quality. By multiplying the occurrence of resuspension flows, sediment scour rates, and estimates of stream width and stream lengths, the fecal coliform bedloads can be calculated. Because loading is a function of stream width and length, the streams with the largest stream surface area exposed to bed sediment will consequently have the largest bed sediment contribution.

The methodology used in BLEST to estimate bedloads is outlined below:

1. Estimate Average Stream Width (from observations, photos).
2. Estimate Stream Length (from monitoring point, to upstream extent of sediment fines source area).
3. Estimate indicator bacteria resuspension from cohesive sediments (Jamieson et al., 2005). In these calculations, the average resuspension rate for bacteria ( $11,000 \text{ CFU m}^{-2} \text{ s}^{-1}$ ) from Jamieson et al. was used.
4. Estimate length of time stream experiences critical shear conditions (used default from BLEST spreadsheet, 0.4 hours, using data from NOAA).
5. Assume shear is occurring along the entire stream reach.

BLEST does not use a fecal coliform resuspension rate in the load calculation. BLEST uses an *E.coli* resuspension rate taken from Jamieson et al. (2005). However, *E. coli* concentrations typically track relatively well with fecal coliform concentrations in the water column, and it is assumed here that using the Jamieson et al. *E. coli* resuspension rates is a reasonably good surrogate for potential fecal coliform resuspension rates.

The figure below presents the BLEST spreadsheet calculations.



**Microsoft Excel - Stream bedload Summary Sheets San Lor [Read-Only]**

File Edit View Insert Format Tools Data Window Help

San Lorenzo Creek Estimated Bedload

**Methodology**

1. Estimate Average Stream Width (from observations, photos)
2. Estimate Stream Length (from monitoring point, to upstream extent of sediment fines source area)
3. Estimate indicator bacteria resuspension from cohesive sediments (Jamieson et al., 2005)
4. Estimate length of time stream experiences critical shear conditions (used default from BLEST spreadsheet, 0.4 hours, using data from NOAA)
5. Assume shear is occurring along the entire stream reach.

**Input Data**

Cholame Creek Stream Width (ft) 10

Number of Rain Days (>0.5 inches precip) 6 source: CIMIS Station 113 - King City

Typical Storm Length 8

Portion of storm experience shear > Tc = 5% default value

Resuspension Rate (cfu/m<sup>2</sup>/s) 11000 (See Table 3 to right)

cfu/m<sup>2</sup>/hr 3.96E+07

cfu/m<sup>2</sup>/hr 3.68E+06

Resuspension rate per storm (cfu/m<sup>2</sup>) 1.47E+07

**Table 3. Summary of resuspension parameters computed for the three Swan Creek storm events.**

Storm	Critical bed shear stress	Critical flow	Resuspension rate
h	N m <sup>-2</sup>	m <sup>3</sup> s <sup>-1</sup>	CFU† m <sup>-2</sup> s <sup>-1</sup>
225	1.7	0.37	11 000
550	1.6	0.33	8 200
600	1.5	0.3	15 000

† Colony forming units.

From Jamieson et al., 2005

**BLEST Calculations:**

**LOAD CALCULATION:**

Subbasin #	Stream	Stream Width (ft)	Stream Length (ft)	Majority Concrete Lined?	MPN/yr	End of MPN/wet day	End of 1013	Begin 1014	End of Res	1017
1	San Lorenzo Crk	10	316341	N	2.89E+13	4.66E+12				4.66E+12

**Load Calculation**

Stream	Stream Width (ft)	Stream Length (ft)	MPN/storm event	MPN/year
Cholame Creek	10	316314	4.66E+12	2.89E+13

Wet day = Day with Precip >0.5 inches, from CIMIS #113 King City Weather Station (ave. 6 Wet days p

**Stream Length Calculation**

Total Length of NHDplus Stream Reaches (feet) = 2433389 feet

Ratio of Watershed comprised of > 40% clay soils = 0.13

Length of Streams Subject to Bed loading = 2433389 feet X 0.13 = 316,314 feet of stream reach subject to bed load resuspension.

## APPENDIX H: LOAD DURATION CURVES

Load duration curves provide a graphical context for looking at monitoring data and can also potentially be used to focus and inform implementation decisions (Stiles and Cleland, 2003). A load duration curve is the allowable loading capacity of a pollutant, as a function of flow. The flow duration curve is transformed into a load duration curve by multiplying the flow by the water quality objective and a conversion factor. The water quality objective that staff selected to calculate the load duration curve was the instantaneous fecal coliform Basin Plan criterion 400 MPN/100 mL. The load duration curve is thus calculated by multiplying the flow at the given flow exceedance percentile, by the instantaneous fecal coliform criteria and unit conversion factors; therefore the loading capacity is:

$$\text{Loading Capacity (MPN/day)} = \text{Water Quality Criterion} \times \text{Flow} \times \text{Unit Conversion Factors}$$

$$\text{Loading Capacity (MPN/day)} = 400 \text{ MPN/100mL} * Q \text{ (cfs)} * 283.2 \text{ 100mL/ft}^3 * 86400 \text{ sec/day}$$

The load duration method essentially uses an entire stream flow record to provide insight into the flow conditions under which exceedances of the water quality objective occur. Exceedances that occur under low flow conditions are generally attributed to loads delivered directly to the stream such as straight pipes, domestic animals or wildlife with access to the stream, or some other form of direct discharge. Exceedances that occur under high flow conditions are typically attributed to loads that are delivered to the stream in stormwater runoff. Exceedances occurring under during normal flows can be attributed to a combination of runoff and direct deposits. As such, the load duration curve may illustrate how flow conditions relate to a variety of pollutant sources, and therefore load duration curves can be useful in differentiating between loading from point and nonpoint sources, as shown in the table below.


### Potential Relationship Between Load Duration Curve and Contributing Sources

Contributing Source	Flow Regime-Load Duration Curve		
	High Flow	Moderate Flow	Low Flow
Direct Point Sources (pipe discharge, etc)			H
Direct Delivery (livestock in-stream, wildlife, pets, illegal dumping)		M	H
Failing OSDS		M	H
Sediment Resuspension	H	M	
Stormwater: Impervious areas	H	H	
Combined sewer overflows	H	H	
Overland flow/Bank erosion	H	M	

-Note: Color Shading = Potential relative importance of source area to contribute loads under given hydrologic condition (H=High; M=Medium)  
 -Table adapted from USEPA, Bruce Cleland, and Oregon Dept. of Environmental Quality.

A load duration curve (shown below) for San Lorenzo Creek at 309LOR was constructed using estimated daily flow records and a spreadsheet tool developed by Bruce Cleland, USEPA (Cleland, 2002).

### Load duration curve for monitoring site 309LOR

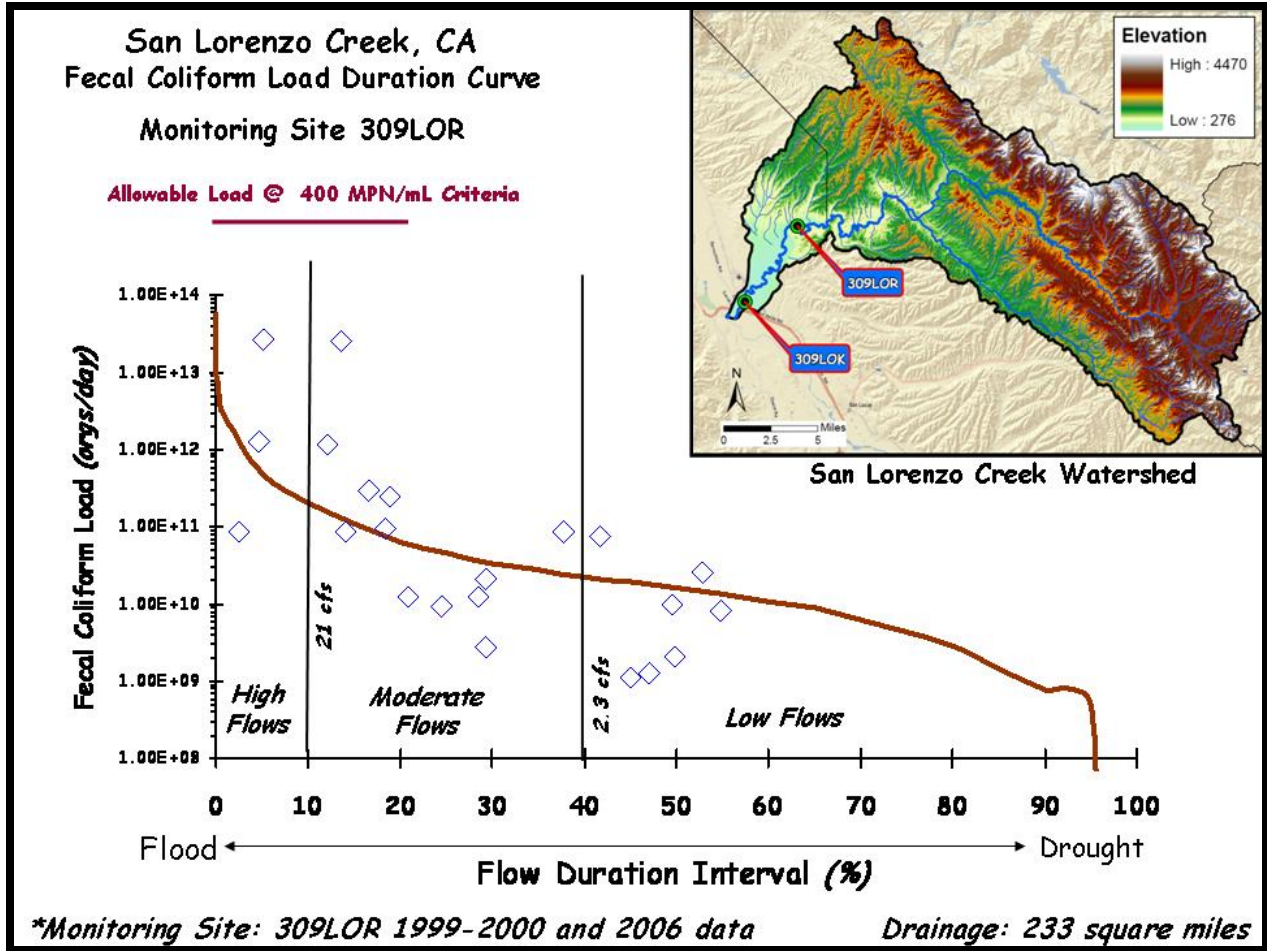

The load duration curve for San Lorenzo Creek presented above indicates that excursions above the water quality objective occur across all flow regimes.

Load duration analysis included a “percent reduction” that was calculated for informational purposes only, to illustrate the difference between existing conditions and the loading capacity at the time the streams were sampled. In accordance with USEPA guidance (USEPA, 2007), existing loading is conservatively calculated as the 90th percentile of measured fecal coliform concentrations under each hydrologic flow regime class multiplied by the flow at the middle of the flow exceedance percentile. For example, the middle percentile (25%) of the moderate flow regime was used, to assess existing loads at moderate flow (10-40<sup>th</sup> percentile flow class). Low flows were handled differently. In San Lorenzo Creek flow is not observed 100% of the time, and data collected in low flow conditions are concentrated at the 40 to 55<sup>th</sup> percentile flows. Therefore, the existing loading at low flow conditions is multiplied by the flow at the 50<sup>th</sup> percentile flow.

A TMDL provides a foundation for identifying, planning, and implementing water quality-based controls to reduce both point and nonpoint source pollution. Though the data used to calculate the percent reductions may be considered “historical”, it provides a representation of the existing FIB loads in the waterbodies over a range of hydrologic conditions. Therefore, the percent reduction should not be viewed as the TMDL but rather a goal to work towards in the implementation phase of the TMDL process with the ultimate goal being the restoration and maintenance of in-stream water quality so that beneficial uses are met. The percent reductions are presented in the table below and can be calculated as:

Percent reduction = [(existing load) - (allowable load)/(existing load)] \*100

Estimated Existing Fecal Coliform Loading for 309LOR with Critical Condition Highlighted

Flow Regime	Loading Capacity	Estimated Existing Load (90 <sup>th</sup> percentile)	Percent Reduction Goal
High Flows	4.99 E+11	2.14 E+13	98%
Moderate Flows	4.6 E+10	1.09 E+12	96%
Low Flows	1.61 E+10	3.56 E+11	96%

Exceedances of the water quality objective occurs over all flow regimes.

Fecal coliform exceedances in the wet season or during precipitation events (high to moderate flow regimes) are generally attributable to nonpoint source discharges; i.e., Bacteria wash-off from the land surface by overland flow during higher flow conditions may be a contributor to fecal coliform loading.

Fecal coliform exceedances in the dry season - when the assimilative capacity of the water body is reduced by low flow conditions - are generally attributable to either point source discharges, or to direct defecation in/around the creek channel by wildlife or domestic animals.

The load duration calculations for this project report, using Bruce Cleland's (2002) spreadsheet tool, are presented below.

LOAD DURATION SUMMARY									
<i>Peak to Low</i>				Station ID: USGS 11151300					Station name: USGS 11151300 SAN LORENZO C BL BITTERWATER C NR KING CITY CA
	<i>cfs</i>	<i>mm</i>	<i>Load</i>	233.0 = Drainage Area (square miles)					
				High	Moist	Mid	Dry	Low	
0.004%	5860.0	23.758	5.74E+13	51	5	1.7	0.4	0.1	
0.01%	3272.0	13.266	3.20E+13	0.207	0.019	0.007	0.002	0.000	
0.10%	639.8	2.594	6.26E+12	4.99E+11	4.60E+10	1.61E+10	4.31E+09	4.89E+08	
1%	268.0	1.087	2.62E+12						
5%	51.0	0.207	4.99E+11						
10%	21.0	0.085	2.06E+11						
15%	11.0	0.045	1.08E+11						
20%	6.6	0.027	6.46E+10						
25%	4.7	0.019	4.60E+10						
30%	3.5	0.014	3.43E+10						
35%	2.8	0.011	2.74E+10						
40%	2.3	0.009	2.25E+10						
45%	2.0	0.008	1.96E+10						
50%	1.7	0.007	1.61E+10						
55%	1.4	0.006	1.37E+10						
60%	1.1	0.004	1.08E+10						
65%	0.9	0.004	8.81E+09						
70%	0.6	0.003	6.26E+09						
75%	0.4	0.002	4.31E+09						
80%	0.3	0.001	2.94E+09						
85%	0.2	0.001	1.47E+09						
90%	0.1	0.000	7.83E+08						
95%	0.1	0.000	4.89E+08						
99%	0.0	0.000	0.00E+00						
100%	0.0	0.000	0.00E+00						

<b>400</b>	<b>WQ Criteria</b>
<b>Key Loading Equations</b>	
<i>Load (lb/day) = Criteria * Flow * (5.3945)</i>	
<i>TSS Load (tons/day)</i>	
<i>= Criteria * Flow * (5.3945/2000)</i>	
<i>Bacteria Load (counts/day)</i>	
<i>= Criteria * Flow * ((20317/100)*60*60*24)</i>	
<i>Note: 1 ft<sup>3</sup> = 28.317 mL</i>	

## APPENDIX I: DAILY LOAD EXPRESSIONS

Staff provides daily load expressions in light of a recent court decision (*Friends of the Earth, Inc. v. EPA, et al.*, No. 05-5015, D.C. Cir. 2006), and USEPA guidance {USEPA 2007(a)}, despite the fact that this is a concentration-based TMDL and a daily or average daily TMDL is not appropriate for this TMDL project. Mass-based daily load expressions are provided to comply with USEPA technical and legal guidance. USEPA continues to recognize the validity of concentration based TMDLs, in accordance with 40 CFR 122.45(f), but recommends supplementing a concentration-based TMDL with a daily load expression

The District of Columbia (D.C.) Circuit Court of Appeals issued a decision in *Friends of the Earth, Inc. v. EPA, et al.*, No. 05-5015 (D.C. Cir. 2006), in which the D.C. Circuit held that two TMDLs for the Anacostia River did not comply with the Clean Water Act because they were not expressed as *daily* loads.

As a result of the decision, USEPA issued a memorandum entitled *Establishing TMDL “Daily” Loads in Light of the Decision by the U.S. Court of Appeals for the D.C. Circuit in Friends of the Earth, Inc. v. EPA et. al., No. 05-5015* (April 25, 2006) and Implications for NPDES Permits in November 2006 that recommends that all TMDLs and associated load allocations (LAs) and wasteload allocations (WLAs) include a daily time increment in conjunction with other temporal expressions (e.g., annual, seasonal) that may be necessary to implement the relevant water quality standards.

The 2007 USEPA draft guidance for establishing Total Maximum Daily Loads includes the following statements:

*“If technically appropriate and consistent with the applicable water quality standard, it may also be appropriate for the TMDL and associated load allocations and wasteload allocations to be expressed in terms of differing maximum daily values depending on the season of the year, stream flow (e.g., wet v. dry weather conditions) or other factors. In situations where pollutant loads, water body flows, or other environmental factors are highly dynamic, it may be appropriate for TMDLs and associated allocations to be expressed as functions of controlling factors such as water body flow. For example, a load-duration curve approach to expressing a TMDL and associated allocations might be appropriate, provided it clearly identifies the allowable daily pollutant load for any given day as a function of the flow occurring that day. Using the load-duration curve approach also has the advantage of addressing seasonal variations as required by the statute and the regulations.”*

*“For TMDLs that are expressed as a concentration of a pollutant, a possible approach would be to use a table and/or graph to express the TMDL as daily loads for a range of possible daily stream flows. The in-stream water quality criterion multiplied by daily stream flow and the appropriate conversion factor would translate the applicable criterion into a daily target.”\**

\* emphasis added



From: USEPA. 2007. Options for Expressing Daily Loads in TMDLs. USEPA Office of Wetlands, Oceans, and Watersheds, Draft Guidance, June 22, 2007.

A daily or average daily TMDL is inappropriate for the proposed allocations and TMDLs due to both (1) the temporal component embedded in the applicable water quality objective for bacteria; and (2) the episodic and highly variable nature of FIB transport and loading in streams make daily fecal coliform loads inappropriate for this TMDL project.

U.S. EPA noted in this guidance document that “for pollutants where the [water quality standard] has a longer than daily duration (e.g., monthly or seasonal average), individual values that are greater than the daily expression do not necessarily constitute an exceedance of the applicable standard.” This is the case with this TMDL project, which is in response to elevated FIB concentrations in project area waterbodies, and a water quality objective that has an embedded monthly temporal component.

Staff, nonetheless, provide the following interpretations of our concentration-based allocations and TMDLs as a daily load expression in MPN/per day in accordance with the draft U.S. EPA guidance. However, we intend to implement the concentration-based TMDLs and allocations.

The mass-based daily load expressions for the San Lorenzo Creek fecal coliform TMDL are presented in the Table below.

**Total Maximum Daily Load, San Lorenzo Creek at 309LOR – Daily Load Expressions.**

Impaired Stream Reaches	Flow Regime	Flow Exceedence Percentile	Flow (cfs)	Flow-based Total Maximum Daily Load	WLA	Load Allocation	MOS
					None	Nonpoint Sources	
San Lorenzo Creek at 309LOR	High	5%	51	4.99 E+11	-	4.99 E+11	Implicit
	Moderate	25%	4.7	4.60 E+10	-	4.60 E+10	Implicit
	Low	50%	1.7	1.61 E+10	-	1.61 E+10	Implicit
	Mean Annual Flow	11.3%	15.2	1.49 E+11		1.49 E+11	Implicit

However, we intend to implement the concentration-based TMDLs and allocations, consistent with the aforementioned USEPA guidance {USEPA, 2007(b)}. As such, daily load expressions presented in this Appendix represent an alternative way to express concentration-based allocations, but the mass-based daily load expressions do NOT formally constitute the TMDL or the allocations.



## **APPENDIX J: COST ESTIMATES AND SOURCES OF FUNDING**

While it is possible to identify a discrete range of costs associated with implementing management practices, there is substantial uncertainty in calculating total costs, or costs associated with future measures. This is in part, due to the uncertainty surrounding the number of facilities, ranches, farms, etc. that will require implementation. Also, specific actions or management measure that are described or identified in the project report can only be suggestions or examples of actions that are known to be effective at reducing loading.

Staff provide estimates of total implementation costs below in Table 6-7. These costs are approximations and come with significant uncertainties, since the number of properties that will require implementation is unknown, and also because the Water Board cannot mandate or designate the specific types of on-site actions necessary to reduce indicator bacteria loading, or to meet allocations by the various responsible parties.

Also, staff did not consider or incorporate improved profitability and economic performance metrics that are commonly reported (e.g., U.S. Dept. of Agriculture and South Dakota State Univ., 2008) to be associated with some of the management practices identified here). Additionally, as a substantial number of grazing lands operators are reportedly proactive with regard to land and animal management, some of the identified management practices presumably have been, or will be implemented, with or without a TMDL. As such, economic estimates provided below are strictly based on an out-of-pocket gross expenditure basis; not a net cost-benefit economic basis.

Cost estimates for specific implementation actions shown here were tabulated from sources provided by the National Resources Conservation Service, U.S. Environmental Protection Agency, U.S. Department of Agriculture, and other sources.

**Planning or Program Development Actions:** The cost to develop FIB control measures at these facilities will vary from site to site depending upon constraints present at each site. Central Coast Water Board staff estimate approximately eight hours is necessary for planning control actions.

**Implementation:** Staff concluded there are a variety of methods owners of domestic animals can use to help control wastes. Some methods include installing livestock exclusion barriers, stables for horses, corrals, and manure bunkers at locations that prevent runoff from entering surface waters.

1. **Livestock Exclusion Barriers:** Based on a survey of professional and technical literature, the Iowa State University Extension program (Mayer and Olsen, 2005) reports the cost of fencing to exclude livestock from areas where animal waste can impact surface waters ranges from \$0.18 to \$1.51 total construction costs per foot of fence (\$950.40 to \$7,972.80 per mile, respectively). Mayer and Olsen (2005) report that that all configurations of fencing shown in their publication “can be used with cattle, and that woven wire and high tensile electrified fencing can be used with sheep, and woven wire can be used with hogs.”

2. Horse Stables: Horses can be boarded at stables. According to the American Miniature Horse Association, miniature horses can be boarded in a professional stable for \$50 to \$150 per month per horse and full size horses can be boarded for \$200 to \$550 per month per horse. The cost depends on the facilities, pasture, and riding opportunities (<http://www.amha.com/MarketTools/Profitability.html>).

3. Corral Cost: According to a Progressive Farmer website, a corral (excluding the head gate) can cost less than \$7,000. Gates cost (at the most) between \$3,000 and \$4,000 (<http://www.progressivefarmer.com/farmer/animals/article/0,24672,1113452,00.html>)

4. Manure Bunker Costs: Ecology Action has worked with landowners to install manure bunkers. Manure bunkers help prevent stormwater from infiltrating the manure thereby causing runoff of pollutants from the manure. According to Ecology Action, the average cost for constructing a manure bunker on properties in the Aptos Creek watershed was approximately \$4,000. (Each bunker was constructed on an existing cement slab, or a new one was poured and employed some type of cover - either a permanent roof or a tarp.) The cost of bunker construction varies greatly depending on the size and materials choice. When looking at bunkers for the entire program, costs ranged from \$3,000 to \$15,000 (Reference: E-mail dated 5-1-2007 from Jennifer Harrison of Ecology Action).

Inspections/Monitoring: The landowner cost for inspections/monitoring will vary depending upon the elements of the Nonpoint Source Implementation Program. The cost could be low for frequent periodic property inspections to assess and prevent discharges. Costs are higher if a landowner performs water quality monitoring.

Reporting: Central Coast Water Board staff estimated it would take approximately eight hours of land owner time to prepare a report to the Water Board. This report is required every three years.

Tabulated Example Costs: Costs associated with on-site management practices for rangeland, grazing animals, and domestic farm animal operations, are tabulated in Table J-1.

Table J-1: Example Costs for Grazing Animal Management Practices.

Practices	Cost	Practices	Cost
	(Maximum, unless otherwise noted)		(Maximum, unless otherwise noted)
Access Road (repair)	\$5/ft.	Pond (repair)	\$10,000 ea.
Attend Training Sessions	Usually <\$40 (transportation/registration fees)**	Range Seeding:	
Brush Mgt.	\$10/ac.	Native species	\$250/ac.
Channel Vegetation	\$600/ac.	Introduced species	\$100/ac.
Clearing and Snagging	\$10/ft.	Riparian Buffer Strip	\$600/ac.
Conservation Tillage	\$20/ac.	Roads*	
Cover/Green Manure Crop:		Culverts and Water Bars	\$150/mile
Native species	\$250/ac.	Road Repairs	\$1,500/mile
Introduced species	\$100/ac.	Spring Development	\$1,000/ea.
Critical Area Planting	\$1,000/ac.	Streambank Protection:	
Fence (upland)	\$2/ft.	mechanical	\$100/ft.
Fence (riparian)	\$2/ft.	Vegetative	\$12.50/ft.
Fence, Electric	\$1.25/ft.	Tank	\$2,500 ea.

Practices	Cost	Practices	Cost
	(Maximum, unless otherwise noted)		(Maximum, unless otherwise noted)
(upland)			
Fence, Electric (riparian)	\$1.25/ft.	Tree Planting w/ irrigation	\$600/ac.
Grade Stabilizer	\$20,000 ea.	Tree Planting w/o irrigation	\$300/ac.
Grassed Waterways	\$20/ft.	Trough (w/ concrete pad)	\$1,000 ea.
Grazing Management:		Trough (w/o concrete pad)	\$800/ea.
Hardened Stream Crossings	\$2,000 to \$6,000**	Trough (small wildlife)	\$500/ea.
Prescribed Grazing	\$6.95/ac. (median)**	Upland Wildlife Habitat Mgt.	\$400/ac.
Provide Shade away from riparian area	\$500/accommodate 5-6 cows** (moveable shading structures)	Vegetative Buffer Strip:	
Remote waterers in pastures	\$4,500 to \$8,200 to install (could be <\$1,000 if water piped from existing well)**	Native Species	\$200/ac.
Rotational Grazing	\$30 to \$70/acre	Introduced Species.	\$75/ac.
Streamside livestock exclusion	(see fence est.) Funding may be available through local conservation office**	Wildlife Watering Facility	\$4,000/ea.
Pipeline	\$1.25/ft.		

Source: NRCS Templeton Service Center Environmental Quality Improvement Program Practices Information (as reported in CCRWQCB Watsonville Slough Pathogen TMDL Project Report, 2005)

\* Estimate provided by Cal Poly State Univ. for Chumash Creek Watershed road improvements.

\*\* U.S. Dept. of Agriculture and South Dakota State Univ., 2008. Reicks et al., "Better Management Practices for Improved Profitability and Water Quality": SDSU publication FS994

Table J-2 presents the estimated number of implementing parties in the TMDL project area

Table J-2: Estimated number of properties with domestic animals requiring implementation.

Category	Land Use*	Project Area Acres*	Number of Property Owner/Operators in Land Use Category**	Number of Properties with Domestic Animal Operations	Number of Properties Requiring Implementation <sup>E</sup>	Number of Acres Requiring Implementation <sup>F</sup>
Grazing Operations	Grazing Lands	141,549	68 <sup>A</sup>	34 <sup>C</sup>	17	3400 <sup>F</sup>
Farm Animals/ Horses	Farmland	8,539	139 <sup>B</sup>	4 <sup>D</sup>	7	N.A.

**Data and Assumptions:**

\* FMMP Land Cover Dataset, from Section 2.1.2.

A: Based on parcel data: approximate amount of assesses in project area having land parcels zoned for grazing by the Monterey County Assessor (34 in Monterey County). Assumed San Benito County had the same number of assesses with grazing land as Monterey County due to both counties having similar-sized land area in the watershed – total = 68 properties in grazing land category.

B: For source of Estimate, see Figure J-1.


C: Assumed only a fraction (~50%) of parcel property owners on grazing land are engaged in livestock grazing operations:  $12 * 0.5 = 6$

D: Due to the relatively small estimated an inventory of horses, goats and sheep in the project area (see Section 4.1), staff presumes only a small fraction - 5% - of households maintain farm animals or horses:  $139 * 0.5 = 7$

E: It is assumed that 50% of properties with livestock grazing operations and 50% of rural residential properties with farm animals/horses will require some form of implementation measures. Some properties reportedly already have implemented management practices; also staff presumes that some properties are currently not contributing to fecal coliform loading to receiving waters.

F: Acres requiring implementation will depend on grazing management method employed (for example, rotational grazing), and the size and number of paddocks. Assume 200 acres average per each grazing operation that requires implementation ( $200 * 17 = 3400$ ).

Figure J-1.

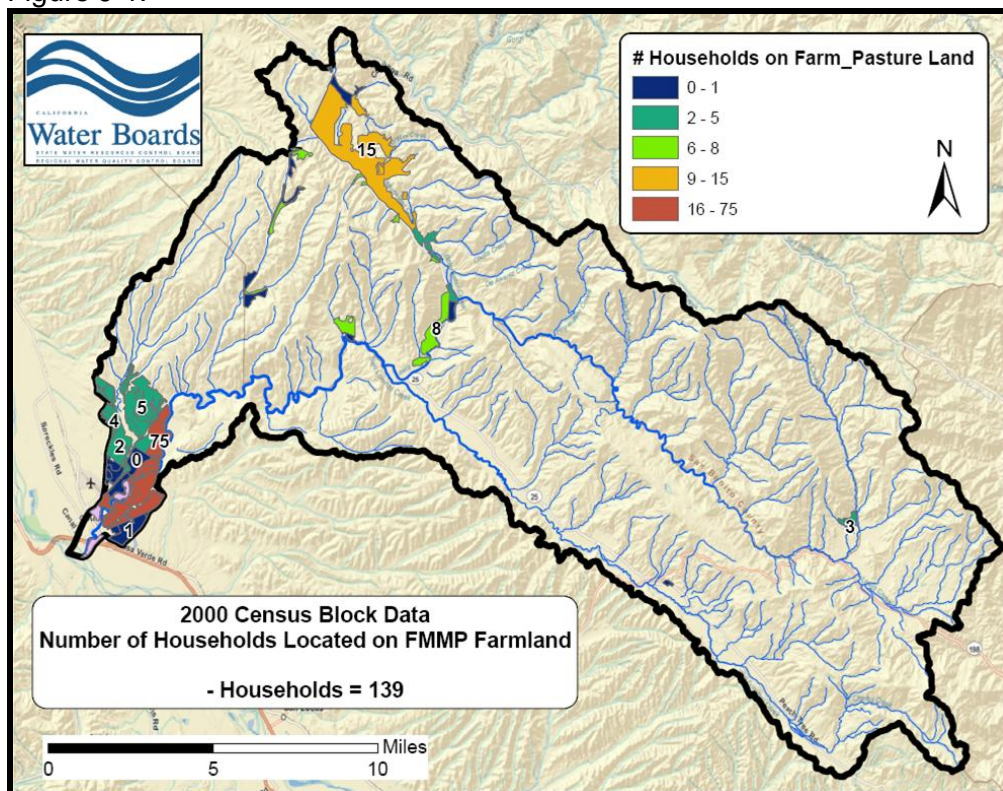

In Table J-3 staff provide cost estimates based on a range of land management practices or structural management practices and associated costs (from Table H-1 and narrative previously presented in this Section) that can plausibly be anticipated to be associated with TMDL implementation activities. It is presumed that management practices will focus on measures that limit that amount of time that domestic animals will spend in creek beds, or limit the opportunity for their waste to be discharged to creeks (e.g., grazing management practices, off-stream watering systems, exclusion barriers). However, it is important to emphasize again that the Water Board cannot mandate a specific type of management measure to achieve load allocations. Additionally, staff provides a range of cost estimates based on the median cost, the 25th percentile cost, and the 75th percentile cost of the management measures presented in Table H-3. Staff presumes that range and variety of management measures will be implemented in the project area and that therefore including a 25th percentile and 75th percentile estimate capture a plausible low-end and high-end economic cost estimates, respectively.

Table J-3: Tabulation of range of costs of selected management practices.

Category	Land or Animal Management Cost Range of Land Management Practices		Structural Measures Cost Range of Structural Management Practices	
	Grazing Operations:  Livestock	Prescribed Grazing	\$6.95/acre (median)	Provide Shade away from riparian area
Rotational Grazing		\$30/acre (min)	Remote waterers	\$1000 (min)
			Remote waterers	\$4,500 (max)
			Streamside Livestock Exclusion (fencing)	\$950/mile (min)*
Rotational Grazing		\$70/acre (max)	Streamside Livestock Exclusion (fencing)	\$7973/mi le(max)*
			Attend Training Sessions	\$40
			Trough	\$800 (min)
			Trough	\$1,000 (max)
Median cost		\$30/acre	Median cost	\$875
P25 Cost		\$18/acre	P25 Cost	\$385
P75 Cost		\$50/acre	P75 Cost	\$1000
Acres requiring implementation		3400	Properties requiring implementation	17
Total Cost for Grazing Operations (Acres or Properties Requiring Implementation multiplied by per acre cost or per structural measure cost)		Total Median Cost	\$102,000	Total Median Cost
	Total P25 Cost	\$61,200	Total P25 Cost	\$6545
	Total P75 Cost	\$170,000	Total P75 Cost	\$17,000
Category	Structural Measures Cost Range of Structural Management Practices			
Rural Residential:  Farm Animals/Hobby Ranches/Confined Animals	Horse Stabling	\$720/one horse/year (min)		
	Horse Stabling	\$6600/one horse/year (max)		
	Corral Construction	\$10,000		
	Streamside Livestock Exclusion (fencing)	\$95 / 0.1 mile (min)*		
	Streamside Livestock Exclusion (fencing)	\$793 / 0.1 miles (max)*		
	Provide Shade away from riparian area	\$500		
	Trough	\$800 (min)		
	Trough	\$1,000 (max)		
	Landowner monitoring and inspection	\$0 (time investment)		
	Manure Bunker	\$3000 (min)		
	Manure Bunker	\$15000 (max)		
	Median cost	\$800		
	P25 Cost	\$625		
	P75 Cost	\$2250		
	Properties Requiring Implementation	7		

<b>Total Cost for Rural Residential Properties with Domestic Animals (83 estimated Properties Requiring Implementation multiplied by structural measure cost)</b>	<b>Total Median Cost</b>	\$5,600
	<b>Total P25 Cost</b>	\$4,375
	<b>Total P75 Cost</b>	\$15,750

\* for fencing cost estimates, grazing operations costs are calculated on a per mile basis. Since rural residential properties are associated with much smaller tracts of land, fencing cost estimate is calculated on one-tenth of a mile basis. Fencing cost estimates are from Mayer and Olsen (2005)

Finally, Table J-4 tabulates the range of costs to implement the TMDL. These represent the collective total cost to all implementing parties over the 13 year timeline of TMDL implementation.

Table J-4: Costs to Implement the TMDL.

<b>Category</b>	<b>P25 Cost (low)</b>	<b>Median Cost</b>	<b>P75 Cost (high)</b>
Grazing Operations Land Management Measures	\$61,200	\$102,000	\$170,000
Grazing Operations Structural Management Measures	\$6,545	\$14,875	\$17,000
Rural Residential: Structural Management Measures	\$4,375	\$5,600	\$15,750
<b>Total Aggregate Cost to Implement TMDL</b>	<b>\$72,120</b>	<b>\$122,475</b>	<b>\$202,750</b>

## Sources of Funding

Potential sources of financing to TMDL implementing parties are described in the Basin Plan, Chapter 4, in section VIII.C.6, as reproduced below.

*On private lands whose owners request assistance, the U.S. Natural Resource Conservation Service (NRCS), in cooperation with the local Resource Conservation Districts (RCDs), can provide technical and financial assistance for range and water quality improvement projects. A Memorandum of Understanding is in place between the U.S. Soil Conservation Service and the State Board for planning and technical assistance related to water quality actions and activities undertaken to resolve nonpoint source problems on private lands.*

In addition, staff provides some examples of funding sources below:

### Environmental Quality Incentives Program (EQIP)

EQIP is a program designed to address significant natural resources needs and objectives including: soil erosion and water pollution prevention, farm and ranch land production, agricultural water conservation, and wildlife habitat preservation and development. EQIP offers financial and technical assistance to eligible participants for the installation of vegetated, structural and management practices on eligible agricultural land. EQIP typically cost-shares at 90 percent of the costs of eligible conservation practices Incentive payments may be provided for up to three years to encourage producers to conduct management practices they would not otherwise do without the incentive. Limited resource producers and beginning farmers and ranchers may be eligible for cost-share up to 90 percent.

More information is also available from the local NRCS or RCD office or at the Monterey County RCD website at

[http://www.rcdmonterey.org/Growers\\_Ranchers\\_Landowners/funding\\_services.html](http://www.rcdmonterey.org/Growers_Ranchers_Landowners/funding_services.html)

#### Clean Water Act 319(h) Grant Program

This program is a federally funded nonpoint source pollution control program that is focused on controlling activities that impair beneficial uses and on limiting pollutant effects caused by those activities. The 319(h) grant program offers funds to non-profit organizations, government agencies including special districts, and education institutions. Specific non-point source activities that are eligible for 319(h) funds may include, but are not limited to: the implementation of best management practices for agricultural drainage, physical habitat alteration, channel stabilization, sediment control, hydrologic modification, livestock grazing, irrigation water management, and confined animal facilities management. Other eligible activities include technology transfer, ground water protection, pollution prevention, technical assistance, facilitation of citizen monitoring and facilities of education elements of projects.

More information is also available from the California State Water Resources Control Board site at [http://www.swrcb.ca.gov/water\\_issues/programs/grants\\_loans/319h/index.shtml](http://www.swrcb.ca.gov/water_issues/programs/grants_loans/319h/index.shtml), or contact [Melenee Emanuel](#), State Board Division of Water Quality, 319(h) Grants Program at (916) 341-5271.

#### Other Sources of Funding for Growers, Ranchers, and Landowners

The Monterey County RCD can provide access to and/or facilitate a land owners application for federal cost-share assistance through various local, state and federal funding programs. For certain projects the RCD may also be able to apply for other grant funds on behalf of a cooperating landowner, grower or rancher. More information is available at the Monterey County RCD website at [http://www.rcdmonterey.org/Growers\\_Ranchers\\_Landowners/index.html](http://www.rcdmonterey.org/Growers_Ranchers_Landowners/index.html).